

DD-11 SILVER ET2 SILVER dryers



EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection.
Online platform free of charge for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages



FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter as drawer



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



CONNECTIVITY

Danube Online communication - IoT as standard
Remote technical service
Management of laundries: OPL and COIN



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components



OTHERS

Grey skinplate outer casing, stainless steel look
NEW: transmission by gear motor on models DD-45 to 80
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric, gas or steam heating
CE approved




OPTIONS

- IoT licence - Danube Online
- NG Natural gas heated tumble dryer (LPG as standard)
- IMC CARE DRY Humidity sensor
- DG Double doorglass DD-11-28
- FEX Sprinkler fire extinguisher 11,14,18
- RD Opposite door opening 11-35
- TR Tropicalized model (ET2)
- DS Perfumes dosing / spraying
- AF Back panel with air filter from 11 to 35
- F06 Fluff filter with grid 0,6mm (standard is 0,3mm)
- F12 Fluff filter with grid 1,2 mm (standard is 0,3 mm)
- SSC Stainless steel outer casing 11
- SSF Stainless steel front panel 11, 14, 18
- BSS Stainless steel steam battery 11-14-18
- LPB Low steam pressure battery 11-14-18
- WB Wooden packing 11
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 230V 1N 50 Hz DD-11 E
- 440/480V 3~ 60 Hz DD-11,18
- Several payment systems for self-service

| CAPACITY & DRUM | UNIT. | DD-11 SILVER ET2 |
|--|--------------------------|------------------|
| Capacity 1/18 | Kg | 11,7 |
| | lb | 25,7 |
| Capacity 1/20 | Kg | 10,5 |
| | lb | 23,1 |
| Ø Drum | mm | 750 |
| | inch | 29,53 |
| Drum length | mm | 475 |
| | inch | 18,70 |
| Drum volume | l | 210 |
| | cu ft | 7,41 |
| Ø Door hole | mm | 574 |
| | inch | 22,60 |
| Door center height | mm | 976 |
| | inch | 38,43 |
| Height from floor to bottom of door | mm | 618 |
| | inch | 24,33 |
| ELECTRIC HEATING | | |
| Evaporation capacity | L/h | 9,3 |
| | US gallon/h | 2,46 |
| Hourly output | Kg/h | 20,3 |
| | lb/h | 44,8 |
| Installed heating power | kW | 12 |
| Installed electrical power | kW | 12,67 |
| Drum motor power | kW | 0,37 |
| GAS HEATING | | |
| Evaporation capacity (gas model) | L/h | 14,5 |
| | US gallon/h | 3,830 |
| Hourly output (gas model) | Kg/h | 28,6 |
| | lb/h | 63,1 |
| Installed gas heating power | kcal/h | 17638 |
| | Btu/h | 70000 |
| Installed gas heating power | kW | 20,51 |
| Installed electrical power | kW | 0,67 |
| Instant propane gas consumption (G31) | Kg/h | 1,76 |
| | lb/h | 3,88 |
| Instant natural gas consumption (G20) | m ³ /h | 2,17 |
| | cfm | 1,28 |
| Ø Gas inlet | BSPP ISO 228-1 | 1/2" |
| STEAM HEATING | | |
| Installed steam heating power | kW | 30 |
| | Btu/h | 102364 |
| Installed electrical power | kW | 0,67 |
| Steam consumption (8 barG) - Standard | kg/h | 53 |
| Steam consumption (116 psiG) | lb/h | 63,8 |
| Steam pressure | barG | 6 - 9 |
| | psiG | 87 - 130,5 |
| Standard steam inlet - outlet | BSPT- ISO7.1 | 3/4" |
| Steam inlet - condensate outlet | NPT ANSI B1.20.1 Tapered | 3/4" |
| Steam consumption (5 barG) - Low Pressure | kg/h | 57 |
| Steam consumption (72,5 psiG) - Low Pressure | lb/h | 68,7 |
| Steam pressure (low pressure) | barG | 3 - 6 |
| | psiG | 43,5 - 87 |
| Low pressure steam inlet - outlet | BSPT- ISO7.1 | 1" |
| VENTILATION | | |
| Fan motor power | kW | 0,25 |
| Nominal air flow rate | m ³ /h | 850 |
| | cfm | 500,29 |



| | | | |
|---|--------------|-----------------|---------------|
| Ø Fume exhaust | mm | 200 | |
| | inch | 7,87 | |
| HEAT EMISSION | | | |
| Maximum total heat emission | kW | 1,2 | |
| | Btu/h | 4097 | |
| Max. front heat emission | kW | 0,84 | |
| | Btu/h | 2867,9 | |
| CONNECTIONS | | E | G / S |
| Tension 230V - I + N + T | Nº x mm² / A | 3 x 25 / 63A | 3 x 1,5 / 16A |
| Tension 230V - III + T | Nº x mm² / A | 4 x 10 / 40A | 3 x 1,5 / 16A |
| Tension 400V - III + N + T | Nº x mm² / A | 5 x 4 / 25A | 3 x 1,5 / 16A |
| NET DIMENSIONS / PACKING DIMENSIONS | | | |
| Net / gross width | mm | 785 / 865 | |
| | inch | 30,91 / 34,06 | |
| Net / gross depth | mm | 855 / 940 | |
| | inch | 33,66 / 37,01 | |
| Net height / gross height (* without heating) | mm | 1.694 / 1.840 | |
| | inch | 66,69 / 72,44 | |
| Net / gross weight | Kg | 172 / 180 | |
| | lb | 379,20 / 396,83 | |
| OTHERS | | | |
| Sound level | dB | 64 | |

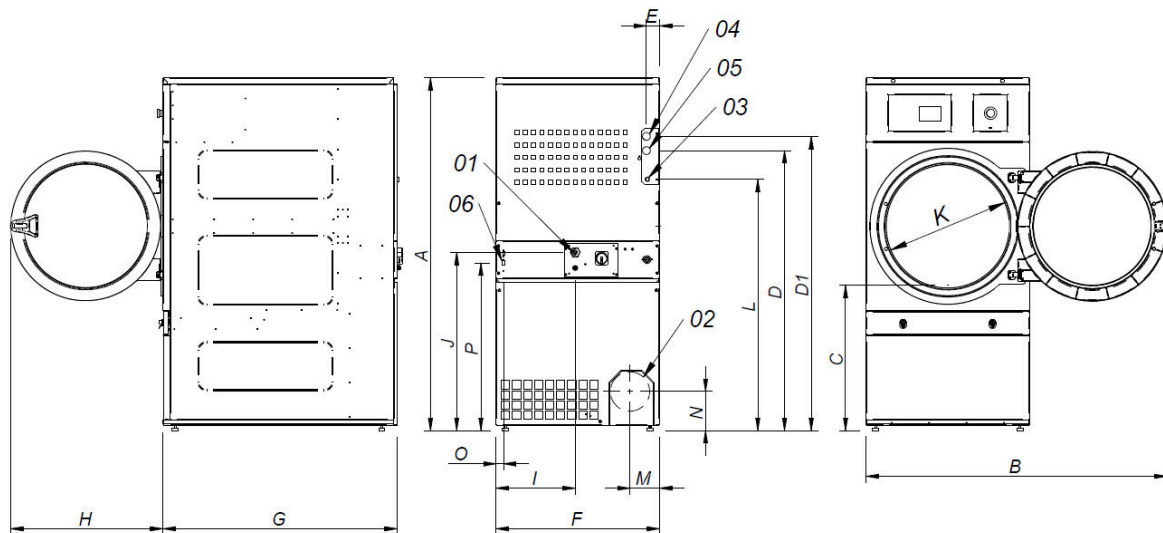

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 ETHERNET CONNECTION

| | A | B | C | D | D1 | E | E1 | F | G | H | I | J | K | L | M | N | O | P |
|-------|-------|------|-----|------|------|----|----|-----|-----|-----|-----|-----|-----|------|-----|-----|----|-----|
| DD-11 | 1694* | 1447 | 689 | 1354 | 1422 | 68 | 68 | 785 | 855 | 735 | 380 | 870 | 575 | 1226 | 133 | 180 | 35 | 805 |
| DD-14 | 1694* | 1447 | 689 | 1354 | 1422 | 68 | 68 | 785 | 989 | 735 | 380 | 870 | 575 | 1226 | 133 | 180 | 35 | 805 |

* Measurement with legs mounted (30mm)

