R3D25/100 N
ø 250mm wall ironers

ELECTRONIC CONTROL

Simple and user friendly: digital screen, precise control of temperature
Preset ironing speeds, not adjustable

FEATURES

Large roll contact area with the linen
Automatic roll lifting control by foot photocell detection
Two available models:
• Standard: roll with cotton polyester coating
• Nomex: roll with Nomex coating



ROBUSTNESS

Nomex coating: resistant to high temperatures
Panels in grey skinplate and stainless steel
Wooden feeding board
New kinematics: better reliability
Industrial components: more durable

EFFICIENCY

Acoustic comfort : 55 dB
Minimum space requirement: space saving, suitable for small spaces
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels, etc.

MAINTENANCE

Easy installation : requires only an electrical connection
Easy access on both sides for maintenance
Quick and easy dismantling of bearings


OTHERS

Front feeding and return
Roll ø 250 mm
Working widths: 1.400 and 2.000 mm
Electric heating
CE certification

OPTIONS

• FP Pedal control instead of photocell R2D25 (except GOLD)
• SC Speed control (except GOLD)
• 230V I + N 50Hz - ø 250 mm only (except 200 mm model)
• 230V I + N 60Hz - ø 250 mm only (except 200 mm and GOLD models)
• 400-230V +N+T 60Hz - ø 250 mm only
• 230V III + N + T 60Hz (ø 250 mm models)
• 400V III +N+T 60Hz (ø 250 mm, standard on GOLD models)

GENERAL DETAILS	UNIT.	R3D25/100 N
Theoretical production 20-25% humidity	Kg/h	27,50
	Lb/H	60,63
Roll Ø	mm	250
	Inch	9,84
Working width	mm	1.000
	Inch	39,37
Working speed	m/min	3,2
	ft/mn	10,50
SC speed control (option)	m/min	1,5 - 4,5
	ft/mn	4,9 - 14,7
Nomex quality coating	-	YES
Electronic control	-	YES
Chest motion	-	AUTO
POWER		
Heating power	Kw	4,95
Roll motor power	Kw	0,18
Fan motor power	Kw	-
Total electric power	Kw	5,13
CONNEXIONS		
Tension 230V I + N + T	nº x mm² /A	3 x 6 / 25A
	n° x AWG/A	3 x 9 / 25A
Tension 230V III + T	nº x mm² /A	4 x 2,5 / 16A
	n° x AWG/A	4 x 13 / 16A
Tension 400V III + N + T	nº x mm² /A	5 x 2,5 / 10A
	n° x AWG/A	5 x 13 / 10A
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	1.462 / 1.490
	Inch	58 / 59
Net depth / Gross depth	mm	484 / 540
	Inch	19 / 21
Net height / Gross height	mm	985 / 1.130
	Inch	39 / 44
Net weight / Gross weight	Kg	114 / 124
	Lb	251 / 273
Volume	m³	0,69 / 0,91
	fr3	24,37 / 32,14
OTHERS		
Number of fume outlets	Nb	-
Ø fume outlets	mm	-
	Inch	-
Air flow (suction)	m3/h	-
	cfm	-
Noise level	dB	55

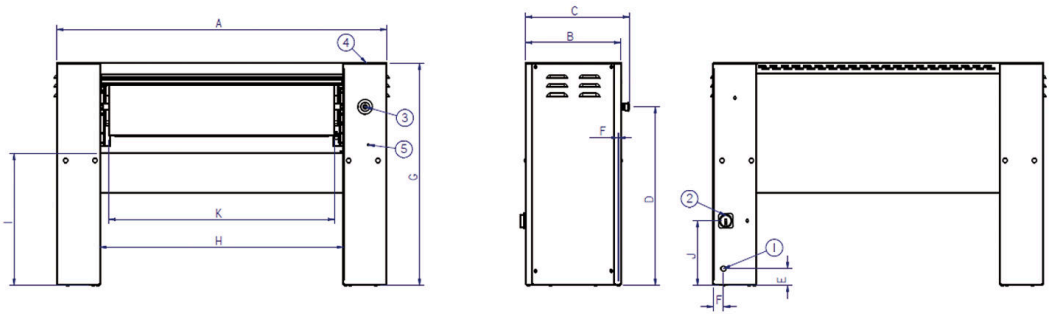

1. Electrical connection
2. Main switch
3. Emergency stop
4. Control panel
5. Maintenance access to inverter

	A	B	C	D	E	F	G	H	I	J	K
R3D25/100	1 462	423	484	791	75	45	985	1 079	610	287	988
R3D25/120	1 662	423	484	791	75	45	985	1 279	610	287	1 198
R3D25/140	1 862	423	484	791	75	45	985	1 479	610	287	1 398
R3D25/200	2 462	423	484	791	75	45	985	2 079	610	287	1 998