



FEATURES

SB-2

- Electric steam boiler with steam iron.
- Small, thermically insulated, electric steam boiler.
- Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kw.
- Manually operated water feeding (drinking water required for its functioning).
- Automatic pressure control by thermostat with fixed setting.
- Mobile trolley as option.

SB-5

- Stainless steel electric steam boiler with electric steam iron.
- Boiler capacity 5 lt, heater 1,45 kw.
- Water level indicator with warning light for empty boiler.
- Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
- Manual water feed.
- Mobile trolley as option.

TCC

- Folding ironing table with electrically heated board and built in suction unit.
- Without steam iron, without built-in boiler
- Board dimensions: 1.100 x 380 x 240 mm

SB-24

ELECTRIC AND AUTOMATIC CENTRAL STEAM BOILER

- Automatic water feeding or ready to be connected to a condensate tank.
- Power available 12 or 22 kw, one set of heaters.
- Steam production: 16 or 29 kg/h.
- Boiler shell manufactured in accordance to the current PED regulations.
- Steam working pressure: 1 - 7 bar
- Boiler capacity 24,9 lt.
- Voltage 400V III+N / 230V III 50-60 Hz




OPTIONS

- Stainless steel condensate recovery tank 83 lt SB24-22 kw
- Stainless steel condensate recovery tank 45 lt SB24-12 kw

GENERAL DETAILS		UNIT.	SB-24
Boiler Capacity	l		24,9
Steam pressure	Bar		0,3 - 7
Working temperature	°C		+5 ÷ +80
Working humidity	-		90% max
Boiler Heater	kW		-
Iron Heater	kW		-
Resistance table	W		-
Suction motor	W		-
CONNECTIONS			
Boiler heaters	kW		12- 22
Steam production	Kg/h		16 - 29,7
Pump motor power	HP		0,5
CONNECTIONS			
Water feeding inlet	Inch		1/2"
Boiler exhaust	Inch		1/2"
Steam inlet	Inch		1/2"
Condensate return with valve	Inch		1/2"
Autonomy	-		-
Operating pressure	BAR		-
DIMENSIONS			
Dimensions*	mm		580 x 660 x 780
Height wheel stand mounted (option)	mm		-
Net weight	kg		85
Gross weight	kg		111
Packing dimensions	mm		880 x 730 x 1.050
Working dimensions	-		-
OTHER			
Voltage	Hz		230-400V III 50/60
Sound level	dB		<70

* Dimensions once assembled



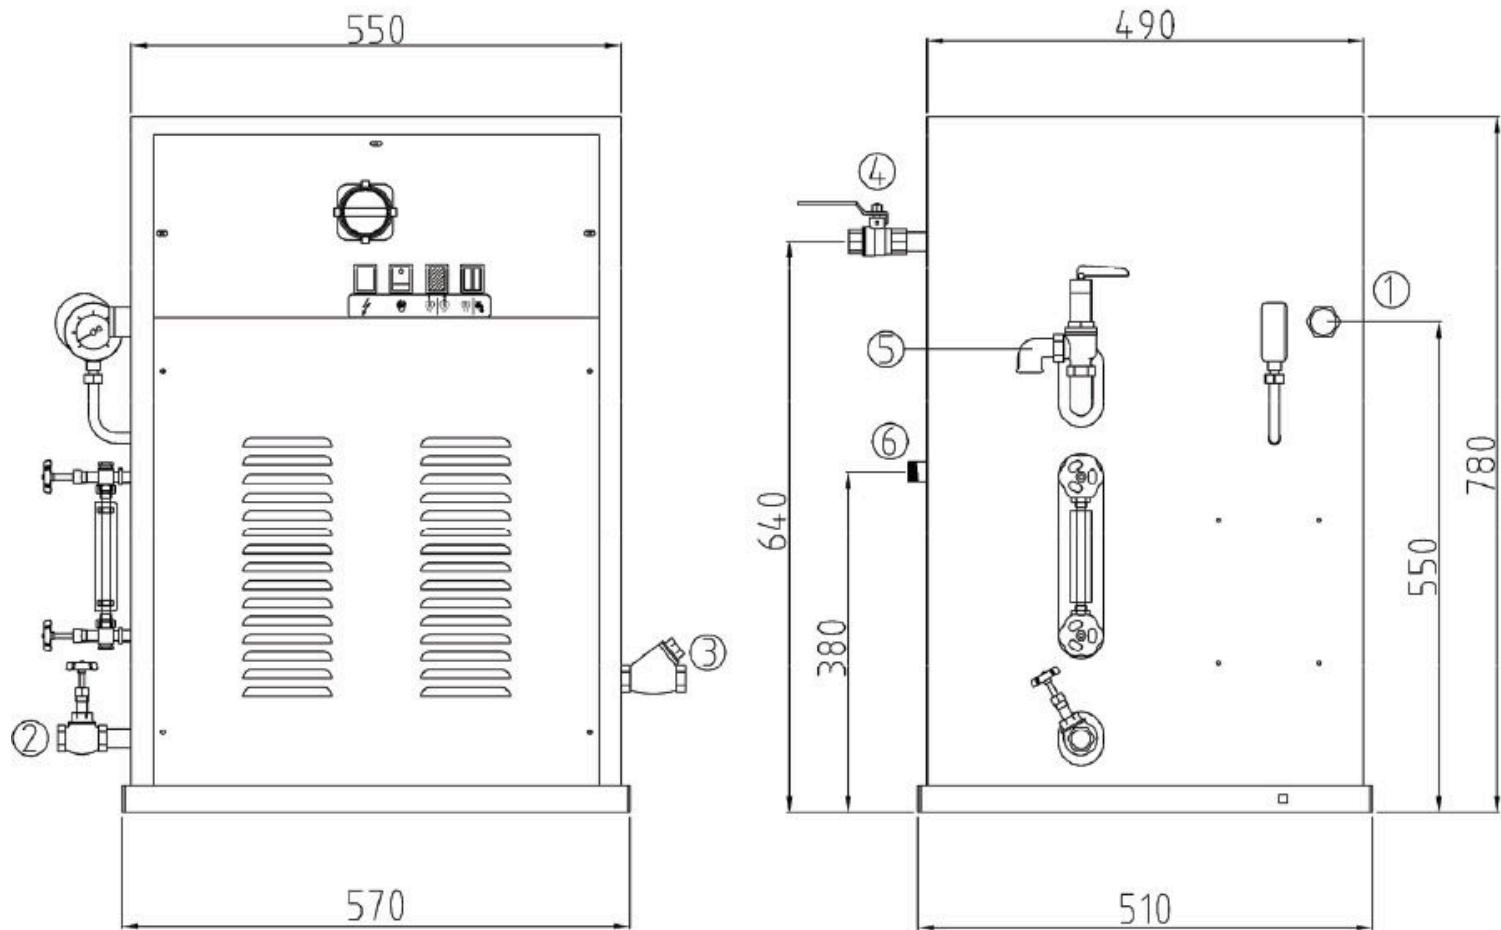

1. PG21 power supply inlet.
2. Boiler exhaust.
3. Water feeding inlet.
4. Steam inlet.
5. Safety valve.
6. Condensate return with valve.