

FEATURES

GV-2

- Electric steam boiler GV-2 with steam iron.
- Small, thermally insulated, electric steam boiler.
- Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kw.
- Manually operated water feeding (drinking water required for its functioning).
- Automatic pressure control by thermostat with fixed setting.
- Mobile trolley as option.

GV-5

- Stainless steel electric steam boiler GV-5, with electric steam iron.
- Boiler capacity 5 lt, heater 1,45 kw.
- Water level indicator with warning light for empty boiler.
- Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
- Manual water feed.
- Mobile trolley as option.

TFP

- Folding ironing table TFP, with electrically heated board and built in suction unit.
- Without steam iron, without built-in boiler
- Board dimensions: 1.100 x 380 x 240 mm

GV-24

ELECTRIC AND AUTOMATIC STEAM BOILER

- Automatic water feeding or ready to be connected to a condensate tank.
- Power available 12 or 22 kw, one set of heaters.
- Steam production: 16 or 29 kg/h.
- Boiler shell manufactured in accordance to the current PED regulations.
- Steam working pressure: 1 - 7 bar
- Boiler capacity 24,9 lt.
- Voltage 400V III+N / 230V III 50-60 Hz





OPTIONS

- Stainless steel condensate recovery tank 83 lt GV24-22 kw
- Stainless steel condensate recovery tank 45 lt GV24-12 kw

GENERAL DETAILS	UNIT.	GV-24
Boiler Capacity	l	24,9
Steam pressure	Bar	0,3 - 7
Working temperature	°C	+5 ÷ +80
Working humidity	-	90% max
Boiler Heater	kW	-
Iron Heater	kW	-
Resistance table	W	-
Suction motor	W	-
CONNECTIONS		
Boiler heaters	kW	12- 22
Steam production	Kg/h	16 - 29,7
Pump motor power	HP	0,5
CONNECTIONS		
Water feeding inlet	Inch	1/2"
Boiler exhaust	Inch	1/2"
Steam inlet	Inch	1/2"
Condensate return with valve	Inch	1/2"
Autonomy	-	-
Operating pressure	BAR	-
DIMENSIONS		
Dimensions*	mm	580 x 660 x 780
Height wheel stand mounted (option)	mm	-
Net weight	kg	85
Gross weight	kg	111
Packing dimensions	mm	880 x 730 x 1.050
Working dimensions	-	-
OTHER		
Voltage	Hz	230-400V III 50/60
Sound level	dB	<70

* Dimensions once assembled



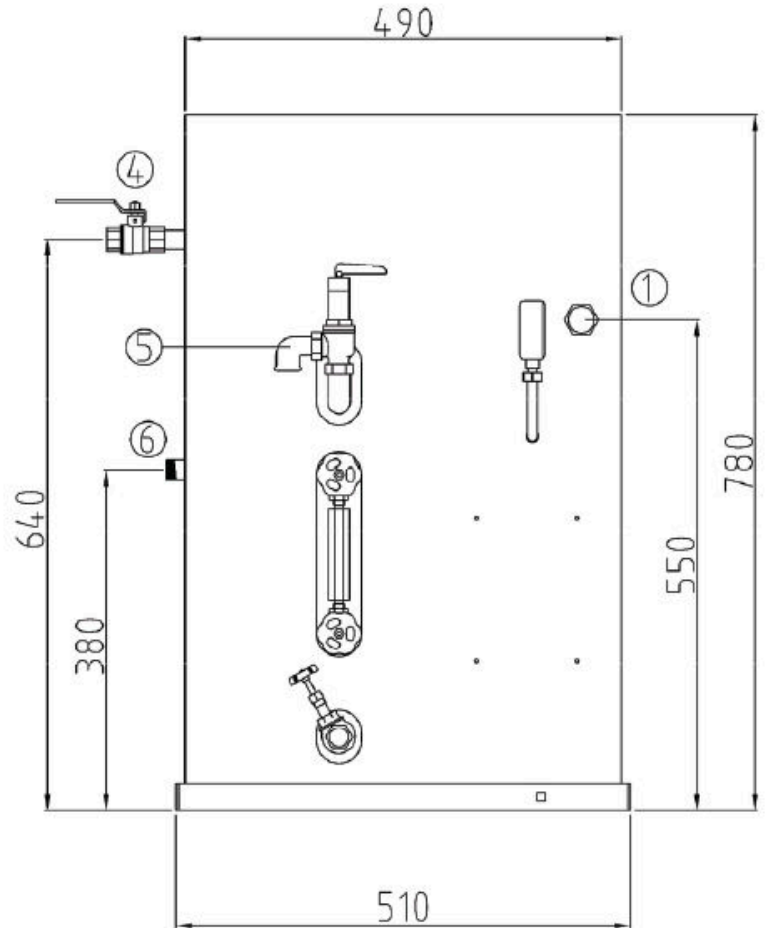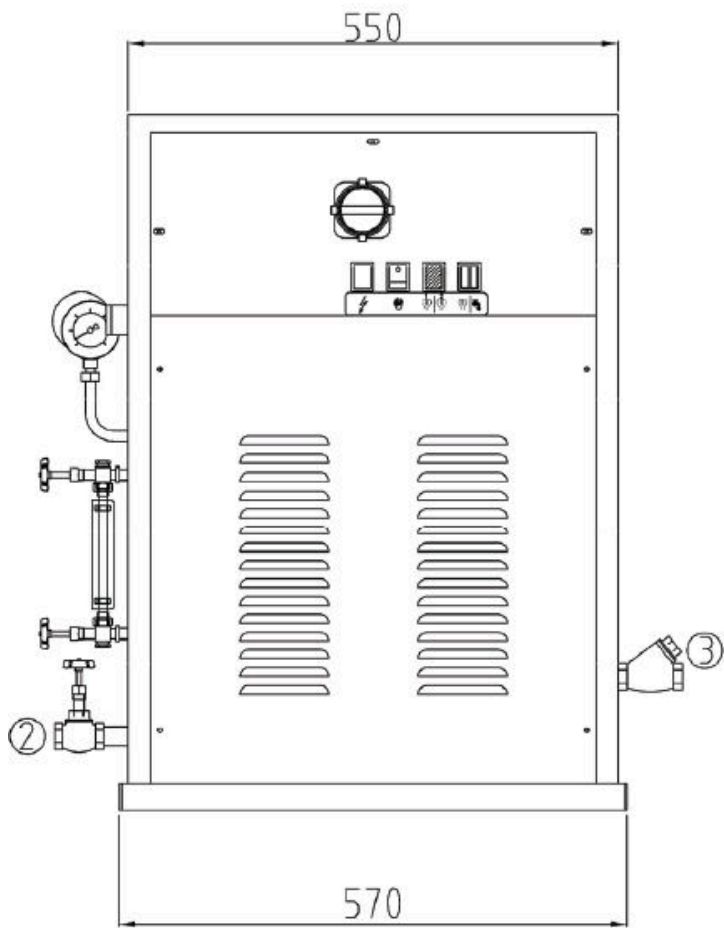

1. PG21 power supply inlet.
2. Boiler exhaust.
3. Water feeding inlet.
4. Steam inlet.
5. Safety valve.
6. Condensate return with valve.

