

# WED-120C ET2

## High spin washers



### EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming, telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard



### G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings



### EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings  
Ready for water recovery tanks AQUABAC



### VERSATILITY

ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard



### CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry  
Multi-payment system



### ERGONOMICS

Big aluminium door  
Easy door lock system



### MAINTENANCE

Hinged panel: easy access to parts  
Technical menu: statistics, errors...



### OTHERS

Free standing: no anchoring to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA for REG4 standards



### OPTIONS


- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WED-100C/120C
- DD Double drain kit WED-100C-120C
- Kit WATERMARK Australia
- TL2 Double tilting kit WED-100C-120C
- TL1 Frontal tilting kit WED-100C-120C
- WS weighing system WED-60C to 120C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-60C-120C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-100C/120C (to transform HW models to steam)
- DH Dual heating kit WED-60C/80C
- SSC Stainless steel outer casing WED-120C
- 440V 3~ (No N) 50/60 Hz 100C / 120C
- 230V 3~ 50/60 Hz 100C / 120C
- IoT licence - Danube Online

DRUM	UNIT.	WED-120C ET2
Capacity 1/9	Kg	130
Capacity 1/10	Kg	115
Volume	l	1.150
Diameter	mm	1.360
Depth	mm	775
GENERAL DETAILS		
Washing speed / Spining speed	r.p.m.	34 / 678
G Factor	-	350
Maximum force transmitted	KN	37,77 ±5,25
Frequency-dynamic force	Hz	11,33
Noise level	dB	< 70
Coin laundry version	-	NO
Double drain	-	OPT.
Weighing system	-	OPT.
Tilting system	-	OPT.
DOOR		
Height door bottom	mm	945
Diameter	mm	700
POWER		
Motor	kW	15
Electric heating power	kW	-
Total electric power (electric model)	kW	-
Total electric power (hw, steam model)	barG	15
CONNECTIONS		HW/S
Tension 110V - I + N + T	Nº x mm² / A	-
Tension 230V - I + N + T	Nº x mm² / A	-
Tension 230V - III + T	Nº x mm² / A	3x16+T - 63A
Tension 400V - III + N + T	Nº x mm² / A	4x6+T - 40A
Steam inlet (Steam model)	inch	1-1/4"
Maximum steam consumption (Steam model)	Kg/h	26,5
Water inlet	inch	1-1/2"
Water main pressuer	Kgs/cm²	2-4
Maximum water consumption*	Lit/h	1.254*
Drain	mm/inch	4"
Drainage capacity	Lit/min	500
DIMENSIONS / PACKING DIMENSIONS		
Net Width/Gross width	mm	1.836 / 1.940
Net Depth/Gross depth	mm	1.832 / 2.030
Net Height / Gross height	mm	2.245 / 2.290
Net weight / Gross weight	kg	2.762 / 3.058
Volume	m³	9

\* Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.

\*\* 400V version / 230V version



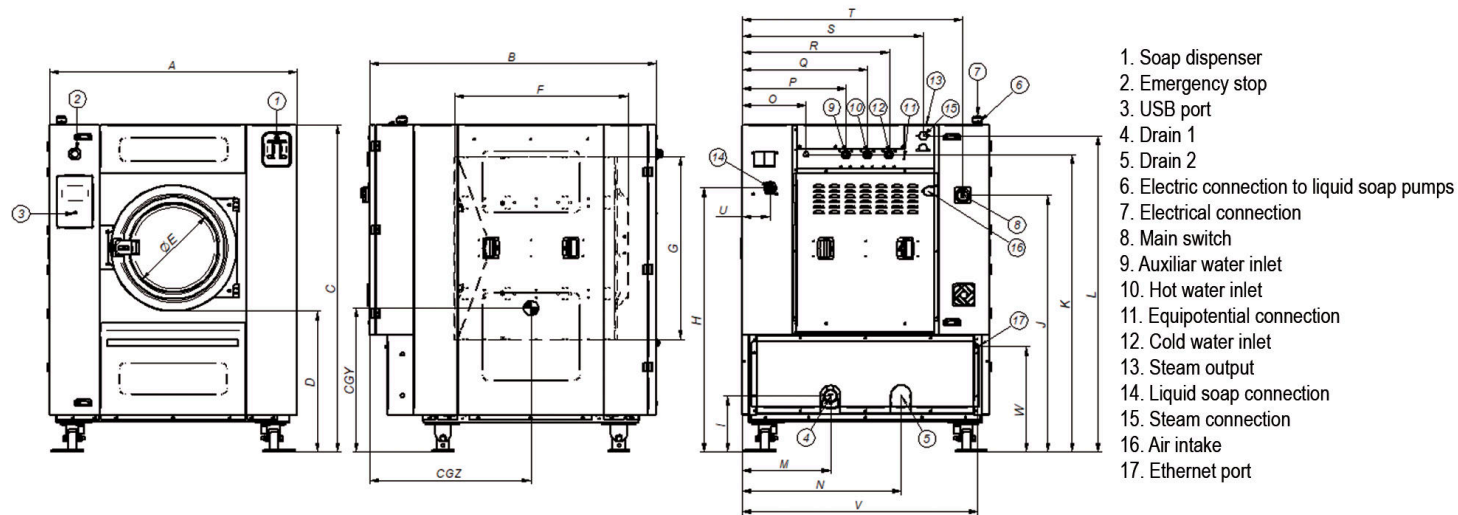

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-100C	mm	1 836	1 710	2 245	945	700	792	1 350	1 740	336	1 781	2 038	2 110	675	1 092	494	634	774	954	994	1 239	1 646	165	2 049	853	1 025
WED-120C	mm	1 836	1 832	2 245	945	700	792	1 350	1 740	336	1 781	2 038	2 110	675	1 092	494	634	774	954	994	1 239	1 646	165	2 049	853	1 130