



# R3D25/140

## ø 250mm wall ironers



### ELECTRONIC CONTROL

Simple and user friendly: digital screen, precise control of temperature  
Preset ironing speeds, not adjustable



### FEATURES

Large roll contact area with the linen  
Automatic roll lifting control by foot photocell detection  
Two available models:

- Standard: roll with cotton polyester coating
- Nomex: roll with Nomex coating



### ROBUSTNESS

Nomex coating: resistant to high temperatures  
Panels in grey skinplate and stainless steel  
Wooden feeding board  
New kinematics: better reliability  
Industrial components: more durable



### EFFICIENCY

Acoustic comfort : 55 dB  
Minimum space requirement: space saving, suitable for small spaces  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels, etc.



### MAINTENANCE

Easy installation : requires only an electrical connection  
Easy access on both sides for maintenance  
Quick and easy dismantling of bearings



### OTHERS

Front feeding and return  
Roll ø 250 mm  
Working widths: 1.400 and 2.000 mm  
Electric heating  
CE certification




### OPTIONS

- SC Speed control (except GOLD)
- 230V I + N 60Hz - ø 250 mm only (except 200 mm and GOLD models)
- 230V III + N + T 60Hz (ø 250 mm models)
- 400V III +N+T 60Hz (ø 250 mm, standard on GOLD models)

GENERAL DETAILS	UNIT.	R3D25/140
Theoretical production 20-25% humidity	Kg/h	33
	Lb/H	72,75
Roll Ø	mm	250
	Inch	9,84
Working width	mm	1.400
	Inch	55,12
Working speed	m/min	3,2
	ft/mn	10,50
SC speed control (option)	m/min	1,5 - 4,5
	ft/mn	4,9 - 14,7
Nomex quality coating	-	NO
Electronic control	-	YES
Chest motion	-	AUTO
POWER		
Heating power	Kw	7
Roll motor power	Kw	0,18
Fan motor power	Kw	-
Total electric power	Kw	7,18
CONNEXIONS		
Tension 230V I + N + T	n° x mm <sup>2</sup> /A	3 x 10 / 40A
	n° x AWG/A	3 x 7 / 40A
Tension 230V III + T	n° x mm <sup>2</sup> /A	4 x 4 / 20A
	n° x AWG/A	4 x 11 / 20A
Tension 400V III + N + T	n° x mm <sup>2</sup> /A	5 x 2,5 / 16A
	n° x AWG/A	5 x 13 / 16A
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	1.862 / 1.890
	Inch	73 / 74
Net depth / Gross depth	mm	484 / 540
	Inch	19 / 21
Net height / Gross height	mm	985 / 1.130
	Inch	39 / 44
Net weight / Gross weight	Kg	134 / 154
	Lb	295 / 340
Volume	m <sup>3</sup>	0,89 / 1,15
	fr3	31,43 / 40,61
OTHERS		
Number of fume outlets	Nb	-
Ø fume outlets	mm	-
	Inch	-
Air flow (suction)	m <sup>3</sup> /h	-
	cfm	-
Noise level	dB	55



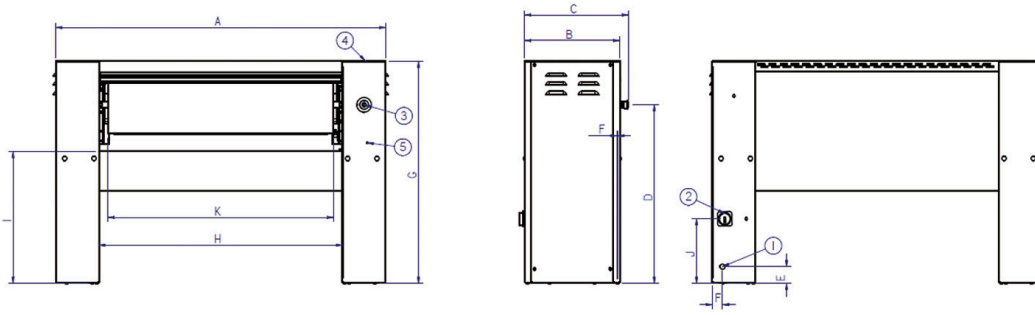

1. Electrical connection
2. Main switch
3. Emergency stop
4. Control panel
5. Maintenance access to inverter

	A	B	C	D	E	F	G	H	I	J	K
<b>R3D25/100</b>	1 462	423	484	791	75	45	985	1 079	610	287	988
<b>R3D25/120</b>	1 662	423	484	791	75	45	985	1 279	610	287	1 198
<b>R3D25/140</b>	1 862	423	484	791	75	45	985	1 479	610	287	1 398
<b>R3D25/200</b>	2 462	423	484	791	75	45	985	2 079	610	287	1 998

