

# DD-11 HPI GOLD ET2

## HPI Heat pump industrial dryers

### EASY TOUCH 2

User-friendly, fully programmable ET2 control with 7" color touchscreen  
USB connection. Free online platform for programming, telemetry, data analysis, etc. thanks to IoT  
Videos display (ads, instructions, etc.)  
37 languages available

### FEATURES

Reversing drum action as standard.  
Stainless steel drum as standard.  
Frequency inverter as standard.

### EFFICIENCY

Double mixed axial-radial airflow  
Big fluff filter  
Double door glass  
Low energy consumption

### VERSATILITY

Make to order - customisation  
WET CLEANING  
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.  
**No need of exhaust to the exterior**

### CONNECTIVITY

IoT Danube online as standard  
Management of laundries: OPL and COIN  
Remote payment

### ERGONOMICS

Drawer as fluff filter, made of stainless steel.  
Biggest door diameters.  
Opening sense of door adjustable on site

### MAINTENANCE

Hinged panel: easy and ergonomic access.  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

### OTHERS

Grey skinplate outer casing, stainless steel look.  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle.  
New filter drawer with wide surface.  
CE approved.




### OPTIONS

- RD Opposite door opening 11-22 HPI
- TR Tropicalized model (ET2)
- SSC Stainless steel outer casing (AISI-304) HPI-11
- SSF Stainless steel front panel AISI-304 HPI-11-18
- 400V 3~ 50/60Hz HPI
- 440/480V 3~ 50/60Hz HPI
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY		UNIT.	DD-11 HPI GOLD ET2
Capacity 1/18		Kg	11,7
		Lb	25,7
Capacity 1/20		Kg	10,5
		Lb	23,1
Evaporation capacity		L/h	6,2
		USGallon/h	1,63
Hourly output		Kg/h	12,3
		lb/h	27,1
Efficiency		kWh/L	0,45
DRUM			
Ø Drum		mm	750
		inch	29,5
Ø Door		mm	574
		inch	22,6
Door center height		mm	976
		inch	38,4
Load hole bottom height		mm	689
		inch	27,13
Drum length		mm	475
		inch	24,33
Drum volume		L	210
		cu ft	7,41
POWER			
Drum motor power		kW	0,37
Fan motor power		kW	0,17
Heating power		kW	2,2
Total electric power		kW	2,74
DIMENSIONS			
Net width		mm	785
		inch	30,9
Net depth		mm	855
		inch	33,6
Net height		mm	1.694
		inch	66,7
Net weight		Kg	292
		lb	644
PACKING DIMENSIONS			
Gross width		mm	865
		inch	34,1
Gross depth		mm	1.125
		inch	44,3
Gross height		mm	1.840
		inch	72,4
Gross weight		Kg	302
		lb	666
OTHERS			
Nominal airflow rate		m <sup>3</sup> /h	VARIABLE
Ø Fume exhaust		mm	NO
Sound level		dB	61
Drain for moisture extraction (hose)		Ø / Length (mm)	12/2000
		Ø / Length (inch)	0,47 / 78,74



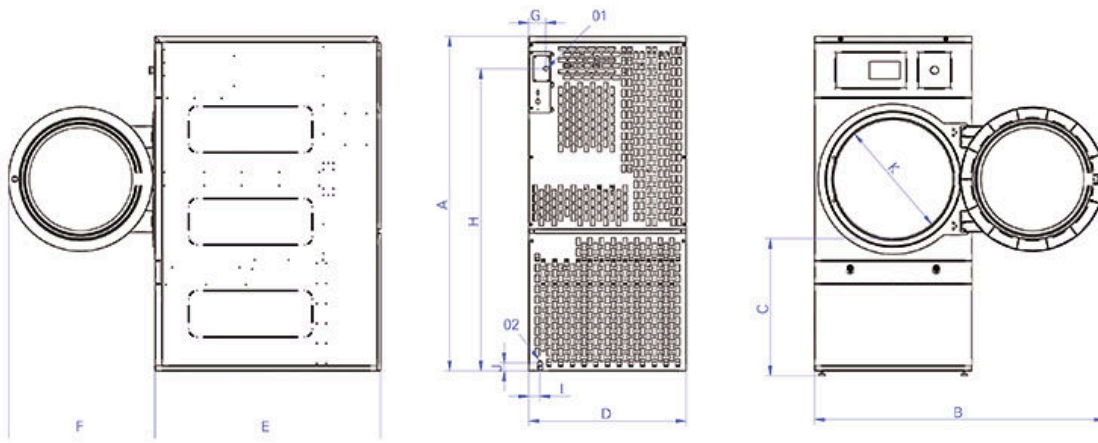

- 01. Power supply
- 02. Condensed water evacuation

Hose 2000 mm long <sup>(1)</sup> and int.  $\varnothing$  17 mm.

<sup>(1)</sup> For longer distances, please refer to the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
<b>DD-11 HPi</b>	mm	1 694	1 450	689	785	855	730	85	1 530	55	90	574
<b>DD-14 HPi</b>	mm	1 694	1 450	689	785	989	730	85	1 530	55	90	574
<b>DD-18 HPi</b>	mm	1 694	1 450	689	785	1 125	730	85	1 530	55	90	574
<b>DD-22 HPi</b>	mm	1 812	1 500	743	890	1 255	730	90	1 650	90	90	574

