MAN-C
Form finishers

FEATURES



MAN / MAN-C
Fully automatic cycle by electronic card
Steaming and drying time controlled by 3 timers.
9 different cycles available
Adjustable shoulder and sleeve widths
Rotation of dummy support at 360°
Does not require compressed air


MAN (WITHOUT BOILER)
• Without steam boiler, to be connected to a central steam supply
• It needs a steam inlet and outlet
• Can be installed with steam generator SB-24 - 12 kw
• Voltage 400 V III +N / 230 V III 50-60 Hz

MAN-C (SELF-CONTAINED)
• Complete with built-in steam boiler 18 lt
• Automatic water feeding
• Automatic pressure control (4,5 bar)
• Voltage 400 V III +N / 230 V III 50-60 Hz.

MAN-SHIRT
• For both water washed or dry cleaned shirts, anoraks or jackets
• Without boiler: to be connected to a central steam supply
• Can be installed with a steam generator SB-24 - 22 KW
• Two sleeve stretchers with double independent traction
• Front heated and reclining panel
• Automatic carriage with photocell for the stretching of side and back part
• Powerful 3 HP fan
• Button placket part of the dummy with suction
• Electronic card featuring nine programs for an automatic working cycle
• Pneumatically operated air flow regulation device
• Manually adjustable shoulder width
• Pneumatically adjustable height of dummy, air working pressure: 5-6 bar, air consumption: 20 Nl/min
•Voltage 400V III+N / 230V III 50-60 Hz

MAN-COAT
• Automatic tensioning finisher for classic coats, overcoats and similar garments
• Witout boiler: to be connected to central steam supply
• Working cycle by electronic card with 9 stored finishing programs, very easy to modify
• Telescopic shape till 1.500 mm
• Special 350° revolving “body” form plus automatic “front & rear” paddle clamps
• Sensor for the “automatic research of the height” of the garment
• Double “antistretching” system in large (waist) and in height (length)
• Mechanical adjustable shoulder group and dedicated “collar” clamp
• Damper for air-volume regulation
• To be connected to compressed air supply, air working pressure 5-6 bar, air consumption 8/9 Nl/min.
• Can be installed with steam generator SB-24 - 22 kw
• Voltage : 400V III+N / 230V III 50-60 Hz

GENERAL DETAILS	UNIT.	MAN-C
Boiler	-	YES
Boiler capacity	L	
Group of iron	-	-
Steam gun	-	OPT
POWER		
Pump motor	HP	0,8
Boiler heater	kW	12
Fan motor	kW	1
CONNECTIONS		
Ø Water inlet	BSP	3/8"
Ø Boiler exhaust (mod. with boiler)	BSP	1/2"
Ø Steam inlet	BSP	-
Ø Condensate outlet	BSP	-
Steam pressure	bar	4,5
Steam consumption	Kg/h	10-15
Ø Air inlet	BSP	-
Ø Air outlet	mm	-
Air pressure	bar	-
Air Consumption	Nl/min	-
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	1.360 / 1.390
Net depth / Gross depth	mm	610 / 640
Net height / Gross height	mm	1.780 / 1.910
Net weight / Gross weight	kg	130 / 151
Volume	m^3	1,48 / 1,70
OTHERS		
Voltage	V	230/400V 3~ 50-60
Sound level	dB	70

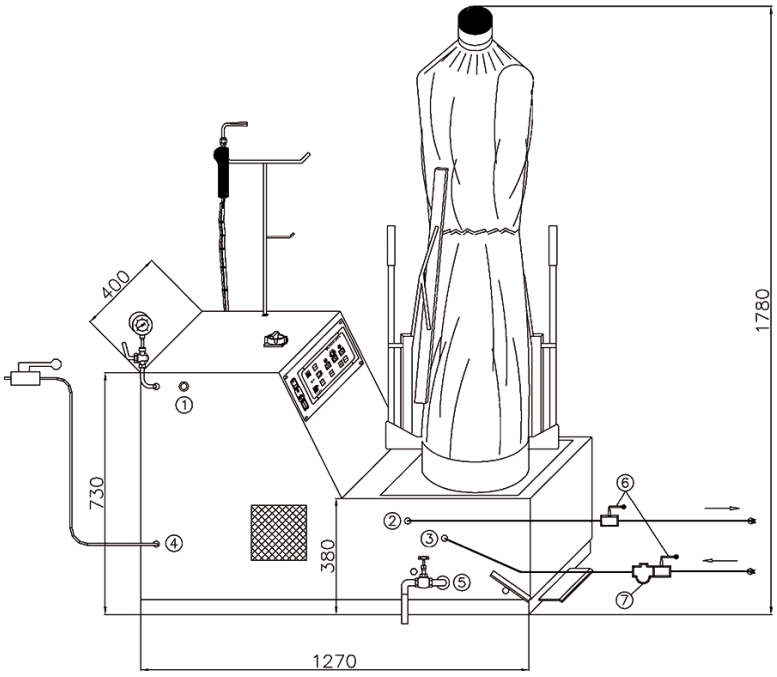

1. Power supply
2. Steam connection 3/8”
3. Condensates return 3/8”
4. Water inlet 3/8”
5. Boiler drain 1/2”
6. Shut-off valve
7. Check valve