DES-F
Spotting tables

FEATURES

DES-F
Cold spotting table with built-in suction unit and stainless steel vacuum swinging arm.
• Featuring two cold spotting spray guns with independent circuits, two receptacles for liquids, hose support and swinging arm with suction and spotting shape out of stainless steel AISI 304.
• Board out of stainless steel AISI 304.
• Board dimensions: 800 x 260 x 175 mm.
• Electric connection: 230V I+N / 50-60 Hz.
• It needs compressed air : consumption 150 Nl/min, air working pressure 6 bar.


DES-F GC
• Model with built-in air compressor
• Electric connection 230/400V III 50Hz.

MINI-DES
Compact cold spotting table with built-in suction unit
• Equipped with two cold spotting guns with independent circuit and two tanks for solvents.
• One working pedal.
• Stainless steel AISI 304 board (400 x 200 x 35 mm).
• Electric connection: 230V I+N / 50-60 Hz.
• It needs compressed air: consumption 30 Nl/min, air working pressure 6-8 bar



OPTIONS
• Steam gun for DES-F

GENERAL DETAILS	UNIT.	DES-F
Board dimensions	mm	800 x 260 x 175
Boiler	-	NO
Compressor	-	OPT
Steam gun	-	OPT
POWER		
Vacuum motor	HP	0,6
Compressor motor	kW	2
CONNECTIONS		
Ø Steam inlet	BSP	3/8"
Ø Condensate outlet	BSP	3/8"
Steam supply pressure	bar	4-6
Working steam pressure	bar	5
Steam consumption	kg/h	3-5
Ø Air inlet	BSP	1/4"
Ø Air outlet	mm	90
Air supply pressure	bar	5-8
Working air pressure	Kg/h	6
Air Consumption	Nl/min	150
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	1.270 / 1.300
Net depth / Gross depth	mm	600 / 650
Alto neto / Alto bruto (folded antenna)	mm	1.900 / 1.160
Net weight / Gross weight	Kg	44 / 53
Volume	m³	1,45 / 0,98
OTHERS		
Voltage	V	230V 1~ 50-60
Sound level	dB	<70

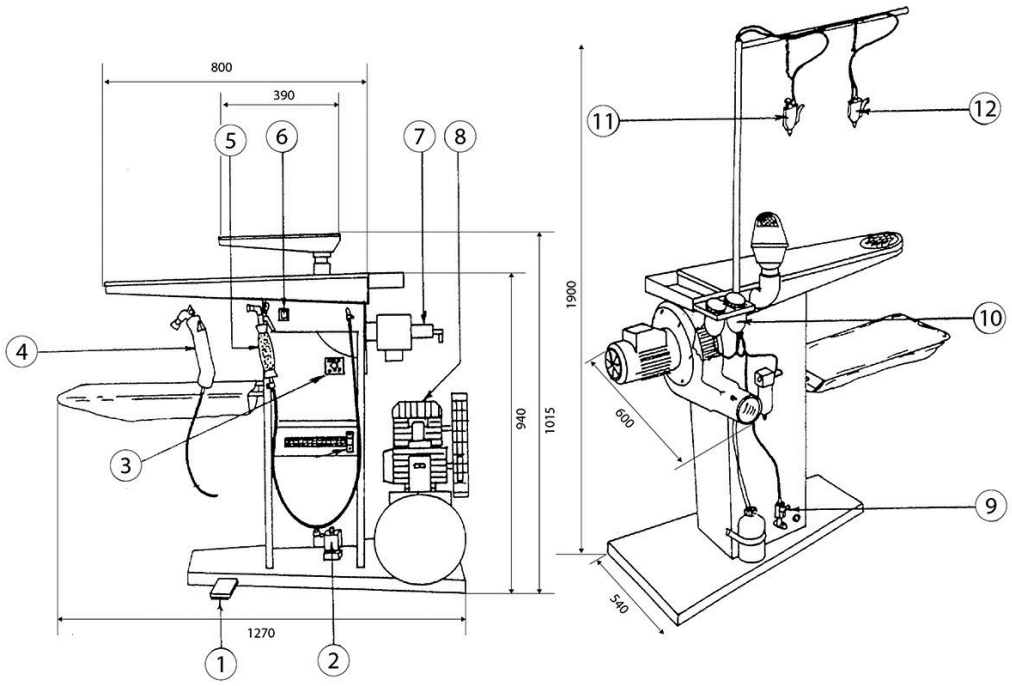

1. Suction pedal
2. Air solenoid valve
3. Three-pole / four-pole selector 40A
4. Air/steam gun (option)
5. Air gun
6. Switch
7. Centalised suction valve
8. Air compressor (option)
9. Water tap
10. Stain-removal liquid tank
11. Spray gun
12. Spotting gun