

DANUBE LAUNDRY KIOSK 12

Payment systems

FEATURES

Two models available:

- 12" touch screen
- 32" touch screen

32" model available with an integrated printer as option

Connection to the Kiosk to the Internet via Ethernet.

Front and rear opening for maintenance.

Integrated with Danube Online IoT for unlimited connections of Danube machines equipped with ET2 control via Ethernet-IoT. Can be connected by means of pulse communication to other equipment (8 machines per kiosk)*

*Installation of an electronic plate required, offered by Danube as option, in case of pulse communication.

SIMPLICITY OF USE


1. Select the process (washing, drying, or ozone disinfection)
2. Select the machine
3. Select the program
4. Pay by placing your card near the contactless device
5. Insert the clothes in the machine and press START.



OPTIONS

- External signal card for pulses

| GENERAL DATA | UNIT. | DANUBE LAUNDRY KIOSK 12 |
|---|-----------|-------------------------|
| Screen size | Inch | 12,1" |
| Ethernet connection | - | YES |
| Contactless reader | - | YES |
| Pulses connection (option) | N° | 8 max. |
| Customizable (stickers) | - | YES |
| Wall installation | - | YES |
| Rear access | - | YES |
| Recommended floor height | mm | 102 |
| Printer | - | NO |
| CONNECTIONS | | E |
| Tension 230V I N + T | N°x mm²/A | 2x1,5+T - 16A |
| Ethernet cable | - | 1 x |
| Pulse wiring | - | 8 x |
| OVERALL DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / gross width | mm | 254 / 315 |
| Net depth / gross depth | mm | 134,3 / 170 |
| Net height / gross height | mm | 536,1 / 575 |
| Net weight / gross weight | mm | 5 / 6 |
| Volume | M3 | 0,018 / 0,031 |

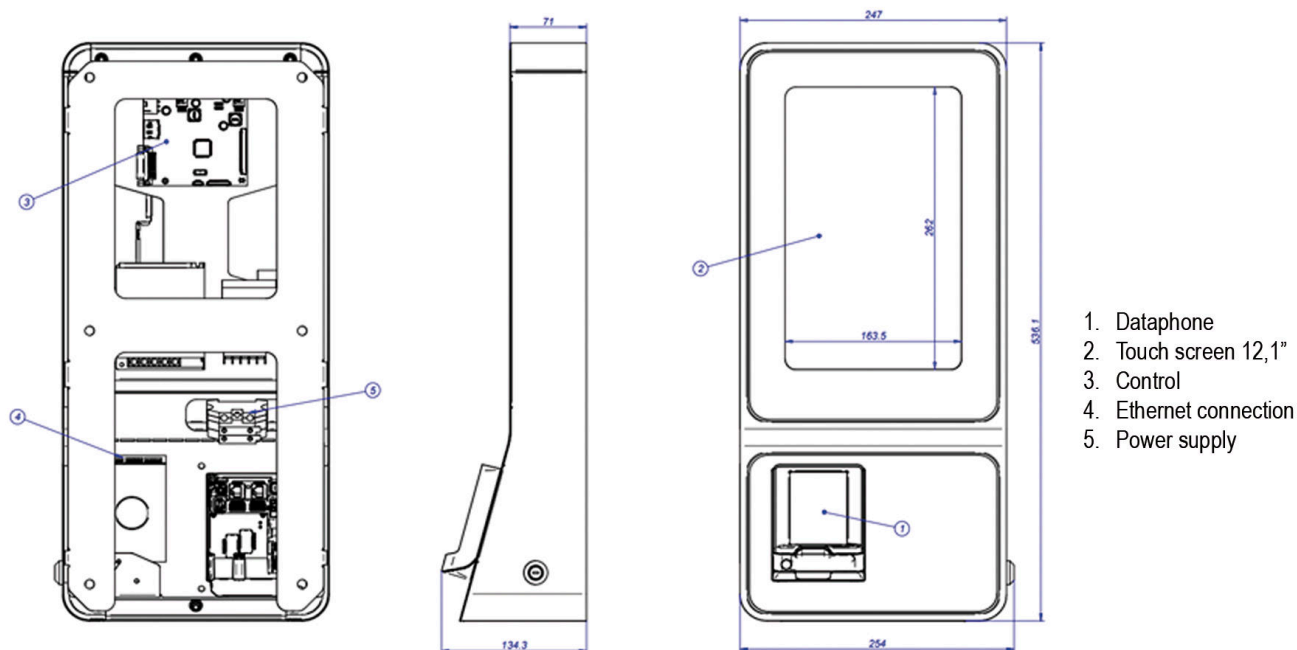

With rear room

All wiring concealed and components can be handled from the rear. For this purpose, it is recommended to drill a cavity in the wall while respecting the anchor points of the Kiosk.

Without rear room

A cable outlet is required at the front which contains the Ethernet cable, power supply and pulse wiring. By opening a lock on the side, it is possible to move the assembly (leaving only the anchor piece on the wall) in order to carry out maintenance operations on the components.