

DD-22 GOLD ET2 GOLD dryers

EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection.
Online platform free of charge for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages

FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

CARE DRY - Intelligent humidity control with new drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system
INSULATED PANELS - Complete thermal insulation of panels and double floor glass
OPTIMAL FLOW - New optimized system of mixed airflow
Big fluff filter

VERSATILITY

Make to order - customisation
WET CLEANING

CONNECTIVITY

Danube Online communication - IoT as standard
Remote technical service
Management of laundries

ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters
Opening sense of door adjustable on site

MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components

OTHERS

Grey skinplate outer casing, stainless steel look
NEW : transmission by gear motor on models DD-45 to 80
SPRINKLER - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric, gas or steam heating
CE approved




OPTIONS

- IoT licence - Danube Online
- NG Natural gas heated tumble dryer (LPG as standard)
- RD Opposite door opening 11-35
- TR Tropicalized model (ET2)
- DS Perfume dosing / spraying
- AF Back panel with air filter from 11 to 35
- F06 Fluff filter with grid 0,6mm (standard is 0,3mm)
- F12 Fluff filter with grid 1,2mm (standard is 0,3mm)
- SSC Stainless steel outer casing 22
- SSF Stainless steel front panel 22
- BSS Stainless steel steam battery 22
- LPB Low steam pressure battery 22
- LPB Low steam pressure battery 22
- 400V 3N 60 Hz DD- 11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- WB Wooden packing 22

CAPACITY & DRUM		UNIT.	DD-22 GOLD ET2
Capacity 1/18		Kg	24,4
		lb	53,9
Capacity 1/20		Kg	22
		lb	48,5
Ø Drum		mm	835
		inch	32,87
Drum length		mm	800
		inch	31,5
Drum volume		l	440
		cu ft	15,54
Ø Door hole		mm	574
		inch	22,60
Door center height		mm	1.030
		inch	40,55
Height from floor to bottom of door		mm	672
		inch	26,46
ELECTRIC HEATING			
Evaporation capacity		L/h	20
		US gallon/h	5,3
Hourly output		Kg/h	40
		lb/h	88,2
Installed heating power		kW	24
Installed electrical power		kW	25,17
Drum motor power		kW	0,37
GAS HEATING			
Evaporation capacity (gas model)		L/h	22,30
		US gallon/h	5,891
Hourly output (gas model)		Kg/h	44,60
		lb/h	98,3
Installed gas heating power		kcal/h	26655
		Btu/h	105775,6
Installed gas heating power		kW	31
Installed electrical power		kW	1,17
Instant propane gas consumption (G31)		Kg/h	2,66
		lb/h	5,86
Instant natural gas consumption (G20)		m ³ /h	3,28
		cfm	1,93
Ø Gas inlet		BSPP ISO 228-1	1/2"
STEAM HEATING			
Installed steam heating power		kW	49,20
		Btu/h	167877
Installed electrical power		kW	1,17
Steam consumption (8 barG) - Standard		kg/h	87
Steam consumption (116 psiG)		lb/h	104,8
Steam pressure		barG	6 - 9
		psiG	87 - 130,5
Standard steam inlet - outlet		BSPT- ISO7.1	1"
Standard steam inlet - condensate outlet		NPT ANSI B1.20.1 Tapered	1"
Steam pressure (low pressure)		barG	3 - 6
		psiG	43,5 - 94
Low pressure steam inlet - outlet		BSPT- ISO7.1	1"
VENTILATION			
Fan motor power		kW	0,75
Nominal air flow rate		m ³ /h	1.500
		cfm	882,87
Ø Fume exhaust		mm	200
Ø Fume exhaust		inch	7,87



HEAT EMISSION			
Maximum total heat emission	kW	1,92	
	Btu/h	6555,1	
Max. front heat emission	kW	1,2	
	Btu/h	4097	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	890 / 970	
	inch	35,04 / 38,19	
Net / gross depth	mm	1.255 / 1.345	
	inch	49,41 / 52,95	
Net height / gross height (*without heating)	mm	1.812 / 1.940	
	inch	71,34 / 76,38	
Net / gross weight	Kg	210 / 230	
	lb	462,97 / 507,06	
OTHERS			
Sound level	dB	65	

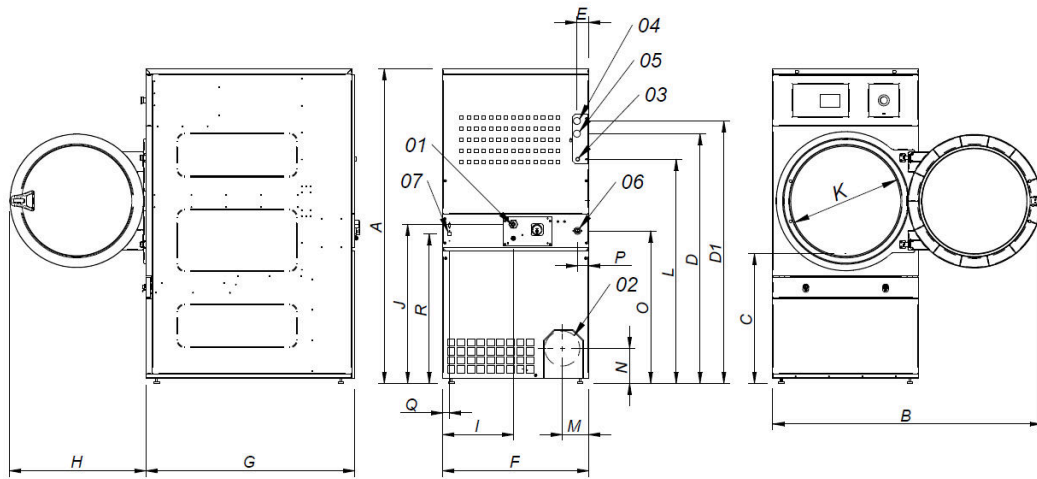

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (22kg)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (22kg)
- 06 SPRINKLER VALVE 3/4"
- 07 ETHERNET CONNECTION

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
DD-18	1694*	1447	689	1354	1422	68	68	785	1125	735	380	870	575	1226	133	180	830	65	35	805
DD-22	1812*	1552	743	1430	1532	112	55	890	1255	735	107	920	575	1344	238	180	885	65	37	860

* Measurement with legs mounted (30mm)

