

# D-26 GOLD

## GOLD ø 325 mm flatwork ironers



### ELECTRONIC CONTROL

BM control, simple and user friendly, 2 selectable operating modes:  
AUTO mode : automatic management of ironing speed according to the selected temperature.  
MANUAL mode: selection of temperature and speed



### EFFICIENCY

Good heat conduction thanks to the roll material and thickness:  
greater control of energy expenditure  
Automatic shutdown at 80°C (adjustable parameter)  
Fumes circulation circuit from the bottom reducing energy consumption  
**Gas radiant burners: + 33% more productive**



### ROBUSTNESS

Roll driving by speed inverter  
Nomex quality feeding and ironing belts: high temperatures resistant  
Panels in skinplate and stainless steel.  
Coiled felt for greater lifespan  
Nickel plate roll as option: anticorrosive, more durable



### ERGONOMICS

Acoustic comfort : <65 dB  
Appropriate operating height: 990 mm feeding belts  
Mininal encumbrance: space saving, suitable for most spaces  
Electronic control with Auto mode: easy to use, optimized ironing speed




### MAINTENANCE

Easy access to all components on both sides of the machine  
Basic connections : electrical connection and air extraction







### OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation  
Front feeding and return  
Built-in cool down system  
Polished steel roll ø 325 mm  
Working widths: 2.000, 2.600 and 2.600 mm  
Electric or radiant gas heating  
CE standard

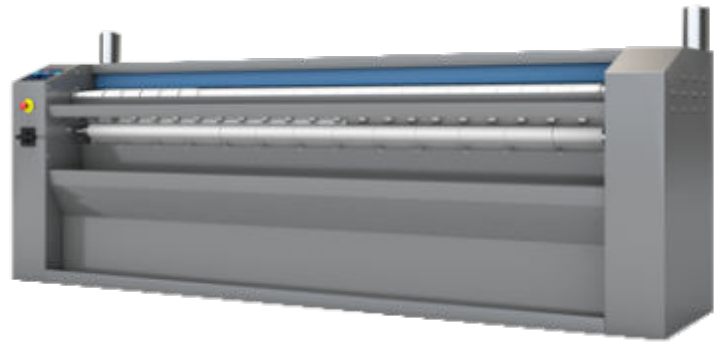

### OPTIONS

- IMC CARE IRON humidity control - ø 325 mm
- NI Nickel plate roll D-26 GOLD
- LPG Propan gas for radiant gas model
- NG Natural gas for radianta gas model
- 230V I N 50 Hz (D-26 GOLD GR)
- 230V I N 60 Hz (D-26 GOLD GR)
- 230V III 50-60 Hz (D-26 GOLD E)
- 440V 50-60 Hz (D-26 GOLD E)

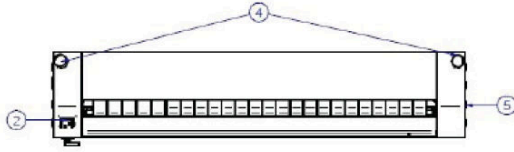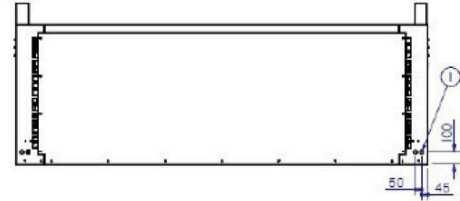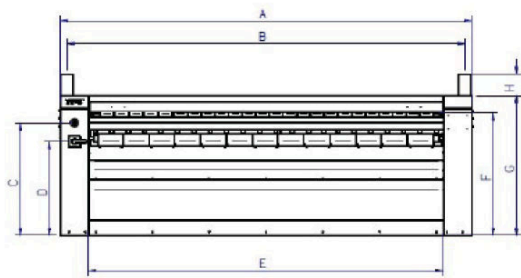

- 01. Electrical connection
- 02. BM Control
- 03. Emergency stop
- 04.  $\varnothing$  98 mm extraction
- 05. Crank
- 06. Main switch

	A	B	C	D	E	F	G	H	I	J
D-20 GOLD	2.552	2.446	900	750	2.110	980	1.112	140	746	686
D-26 GOLD	3.202	3.096	900	750	2.760	980	1.112	140	746	686
D-33 GOLD	3.852	3.746	900	750	3.410	980	1.112	140	746	686