

# WEN-60C ET2

## Low spin washers



### EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming, telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard



### G FACTOR

G factor 200/150 (WED-60C/80C)



### EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings



### VERSATILITY

OPL <> SELF-SERVICE  
ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard



### CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry  
Multi-payment system



### ERGONOMICS

Big aluminium door  
Easy door lock system



### MAINTENANCE

Hinged panel: easy access to parts  
Same parts for all the models: electronic components, gear, inverter, contactors  
Technical menu: statistics, errors...



### OTHERS

Hard mounted washers to be anchored to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA certificate for REG4 standards.



### OPTIONS

- IoT licence - Danube Online
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-60C/80C
- Anchoring base WEN-60C
- Water hose kit WED/WEN-60C/80C (one per water intake)
- RD reverse door opening
- TR Tropicalized model (ET2)
- SSC Stainless steel outer casing WEN-60C
- SSF Stainless steel front panel WEN-60C
- 440V 3~ (No N) 50/60 Hz 60C
- 230V 3~ 50/60Hz 60C
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN


DRUM	UNIT.	WEN-60C ET2	
Capacity 1/9	Kg	65	
Capacity 1/10	Kg	59	
Volume	l	590	
Diameter	mm	1.048	
Depth	mm	684	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	42,5 / 505	
G Factor	-	150	
Maximum force transmitted	KN	9,12 ±15	
Frequency-dynamic force	Hz	6,93	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting door	-	NO	
SLUICE option	-	NO	
DOOR			
Height center door / Height door	mm	900 / 540	
Diameter	mm	560	
POWER			
Motor	kW	5,5	
Electric heating power	kW	36	
Total electric power (electric model)	kW	38	
Total electric power (hw, steam model)	barG	5,5	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm² / A	-	-
Tension 230V - I + N + T	Nº x mm² / A	-	-
Tension 230V - III + T	Nº x mm² / A	3x25+T - 100A	3x4+T - 32A
Tension 400V - III + N + T	Nº x mm² / A	4x16+T - 63A	4x1,5+T - 16A
Steam inlet (Steam model)	inch	3/4"	3/4"
Maximum steam consumption (Steam model)	Kg/h	21	
Water inlet	inch	1"	
Water main pressuer	Kgs/cm²	2-4	
Maximum water consumption	Lit/h	627,9**	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	1.225 / 1.335	
Net Depth/Gross depth	mm	1.315 / 1.440	
Net Height / Gross height	mm	1.640 / 1.860	
Net weight / Gross weight	kg	930 / 1.050	
Volume	m³	2,64 / 3,6	

\* Program n°20, 75% load

\*\* Program No 2, 100% load

\*\*\* 400V/230V version



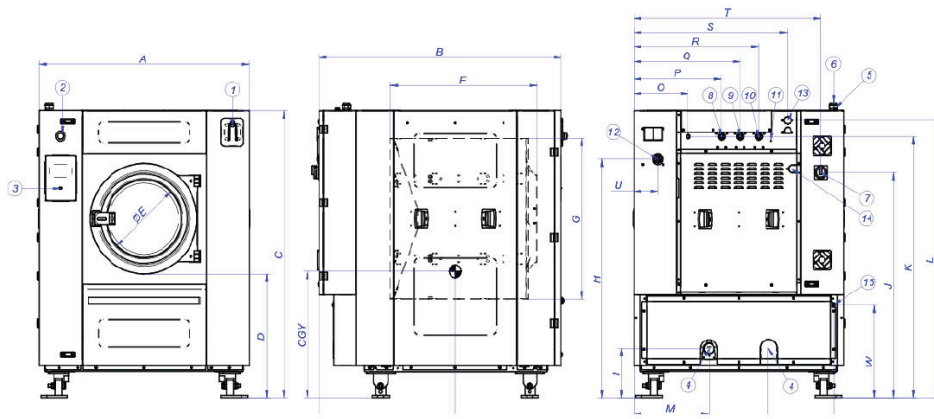

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN 2
5. DRAIN 1
6. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. MAIN SWITCH
9. AUXILIAR WATER INLET
10. HOT WATER INLET
11. EQUIPOTENTIAL CONNECTION
12. COLD WATER INLET
13. STEAM OUTPUT
14. LIQUID SOAP CONNECTION
15. STEAM CONNECTION
16. AIR INTAKE
17. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-60C	1.225	1.279	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	972
WEN-80C	1.225	1.493	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	750

