

# DD-22 BASIC EM BASIC dryers



## ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



## FEATURES

Reversing drum action as standard  
Galvanized drum as standard  
Frequency inverter as standard



## EFFICIENCY

Big fluff filter



## VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## ERGONOMICS

Big door diameters  
Opening sense of door adjustable on site



## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics, data recovery for after-sales service, software updates, etc.  
Easy access to components



## OTHERS

White painted panels  
**COOL DOWN** - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved




## OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DD-22 BASIC EM	
Capacity 1/18		Kg	24,4	
		lb	53,9	
Capacity 1/20		Kg	22	
		lb	48,5	
Ø Drum		mm	835	
		inch	32,9	
Drum length		mm	800	
		inch	31,5	
Drum volume		l	440	
		cu ft	15,54	
Ø Door hole		mm	574	
		inch	22,6	
Door center height		mm	1.030	
		inch	40,6	
Height from floor to bottom of door		mm	672	
		inch	26,46	
ELECTRIC HEATING				
Evaporation capacity		L/h	17	
		US gallon/h	4,49	
Hourly output		Kg/h	34	
		lb/h	74,96	
Installed heating power		kW	24	
Installed electrical power		kW	24,97	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	20	
		US gallon/h	5,28	
Hourly output (gas model)		Kg/h	40	
		lb/h	88,18	
Installed gas heating power		kcal/h	26655	
		Btu/h	105776	
Installed gas heating power		kW	31	
Installed electrical power		kW	0,97	
Instant propane gas consumption (G31)		Kg/h	2,66	
		lb/h	5,86	
Instant natural gas consumption (G20)		m <sup>3</sup> /h	3,28	
		cfm	1,93	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,55	
Nominal air flow rate		m <sup>3</sup> /h	1.200	
		cfm	706	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	2,4	
		Btu/h	8194	
Max. front heat emission		kW	1,7	
		Btu/h	5736	
CONNECTIONS				
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	E	G
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	-	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	4 x 25 / 80A	3 x 1,5 / 16A
			5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	890 / 970	
		inch	35 / 38,2	



Net / gross depth	mm	1.255 / 1.345
	inch	49,4 / 53
Net height / gross height	mm	1.812 / 1.940
	inch	71,3 / 76,4
Net / gross weight	Kg	210 / 230
	lb	463 / 507
<b>OTHERS</b>		
Sound level	dB	65

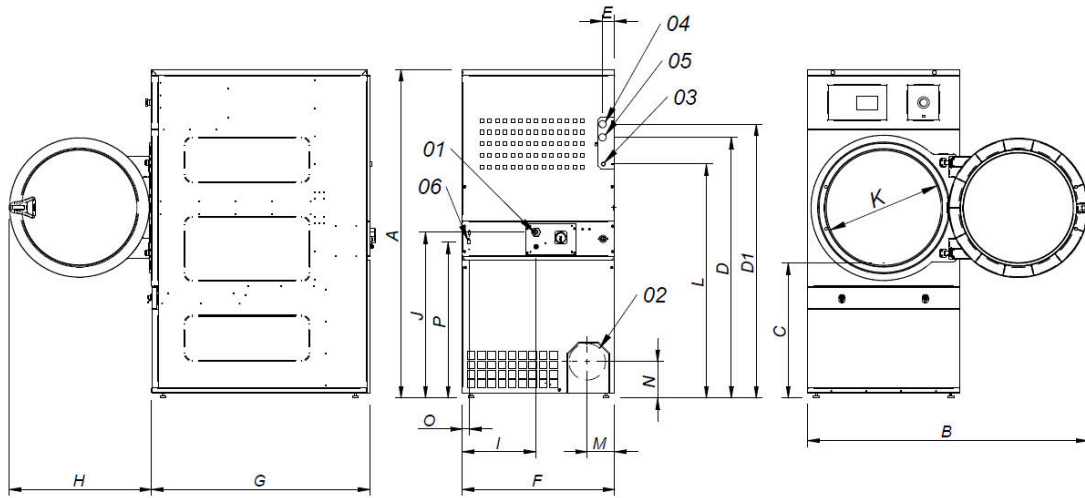

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4" (DD-18)
- 04 STEAM INLET 1" (DD-22)
- 05 CONDENSATE OUTLET 3/4" (DD-18)
- 05 CONDENSATE OUTLET 1" (DD-22)
- 06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-18	1694*	1447	689	1354	1422	68	68	785	1125	735	380	870	575	1226	133	180	35	805
DD-22	1812*	1552	743	1430	1532	112	55	890	1255	735	107	920	575	1344	238	180	37	860

\* Measurement with legs mounted (30mm)

