

DD-22 BASIC EM BASIC dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Galvanized drum as standard
Frequency inverter as standard



EFFICIENCY

Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Big door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components



OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved




OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DD-22 BASIC EM
Capacity 1/18	Kg	24,4
	lb	53,9
Capacity 1/20	Kg	22,0
	lb	48,5
Ø Drum	mm	835
	inch	32,87
Drum length	mm	800
	inch	31,5
Drum volume	l	440
	cu ft	15,54
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	1.030
	inch	40,55
Height from floor to bottom of door	mm	672
	inch	26,46
ELECTRIC HEATING		
Evaporation capacity	L/h	17
	US gallon/h	4,5
Hourly output	Kg/h	34
	lb/h	75
Installed heating power	kW	24
Installed electrical power	kW	24,97
Drum motor power	kW	0,37
GAS HEATING		
Evaporation capacity	L/h	22,30
	US gallon/h	5,283
Hourly output	Kg/h	40
	lb/h	88,2
Installed gas heating power	kcal/h	26655
	Btu/h	105775,6
Installed gas heating power	kW	31
Installed electrical power	kW	0,97
Instant propane gas consumption (G31)	Kg/h	2,66
	lb/h	5,86
Instant natural gas consumption (G20)	m ³ /h	3,28
	cfm	1,93
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	-
	Btu/h	-
Installed electrical power	kW	-
Steam consumption (8 barG) - Standard	kg/h	-
Steam consumption (116 psiG)	lb/h	-
Steam pressure	barG	-
	psiG	-
Standard steam inlet - outlet	BSPT- ISO7.1	-
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	-
Steam consumption (5 barG) - Low Pressure	kg/h	-
Steam consumption (72,5 psiG) - Low Pressure	lb/h	-
Steam pressure (low pressure)	barG	-
	psiG	-
Low pressure steam inlet - outlet	BSPT- ISO7.1	-
VENTILATION		
Fan motor power	kW	0,55
Nominal air flow rate	m ³ /h	1.200
	cfm	706,29



Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	2,4	
	Btu/h	8193,9	
Max. front heat emission	kW	1,68	
	Btu/h	5735,8	
CONNECTIONS			
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	890 / 970	
	inch	35,04 / 38,19	
Net / gross depth	mm	1.255 / 1.345	
	inch	49,41 / 52,95	
Net height / gross height without heating	mm	1.812 / 1.940	
	inch	71,34 / 76,38	
Net / gross weight	Kg	210 / 230	
	lb	462,97 / 507,06	
OTHERS			
Sound level	dB	65	

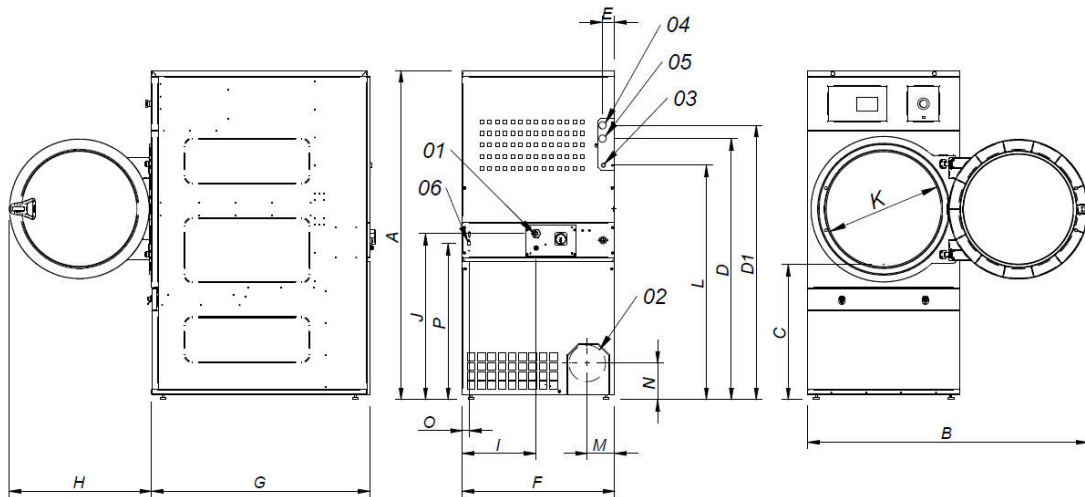

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4" (DD-18)
- 04 STEAM INLET 1" (DD-22)
- 05 CONDENSATE OUTLET 3/4" (DD-18)
- 05 CONDENSATE OUTLET 1" (DD-22)
- 06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-18	1694*	1447	689	1354	1422	68	68	785	1125	735	380	870	575	1226	133	180	35	805
DD-22	1812*	1552	743	1430	1532	112	55	890	1255	735	107	920	575	1344	238	180	37	860

* Measurement with legs mounted (30mm)

