WEN-14 ET2
Low spin washers

EASY TOUCH 2

7” touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

G factor 200/150 (WED-60C/80C)

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configuable levels of savings

VERSATILITY

OPL <> SELF-SERVICE
ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Same parts for all the models: electronic components, gear, inverter, contactors
Technical menu: statistics, errors...

OTHERS

Hard mounted washers to be anchored to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA certificate for REG4 standards.



OPTIONS

• Dosing pumps kit DQ-2
• RT Ready for AQUABAC XL conn. 3/4" for washers WEN/WED-11/14/18/22/28
• Additional dosing pump DB-1
• SL SLUICE 8 mm drum perforations option WEN-14
• Kit WATERMARK Australia
• Anchoring base WEN-14
• Kit External double drain 3" WEN 11-14
• NC Normally closed valve WEN-14
• RC AQUA FLOW water recirculation kit WEN-14 (not available with AQUABAC)
• SG Silicon gasket WED-WEN 11-14
• XD 6 extra dosing signals card WEN 11-45C
• RD reverse door opening
• TR Tropicalized model (ET2) 11-80
• Steam kit WEN-11-14-18-22 (to transform E or HW models to steam)
• SSC Stainless steel outer casing AISI-304 WEN-14
• SSF Stainless steel front panel AISI-304 WEN-14
• Transformer kit 110/230V 1,2 KV WEN-11-14-18
• Transformer kit 110/230V 1,2 KV 11-14-18
• 440V 3~ (No N) 50/60 Hz 14
• IoT licence - Danube Online
• Several payment systems for self-service
• UD Kit temporized door opening WED-WEN

TECHNICAL DATA	UNIT.	WEN-14 ET2	
DRUM			
Load capacity 1:9 / 1:10	Kg	14/13	
Volume	l	130	
	gal	34,3	
Diameter	mm	620	
	inch	24,1	
Depth	mm	430	
	inch	16,9	
GENERAL DATA			
Washing speed / Spin speed	r.p.m.	53 / 759	
G factor	-	200	
Maximum transmitted force	KN	2,31 ±4	
Dynamic force frequency	Hz	8,93	
Sound level	dB	< 70	
Self-service version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting system	-	NO	
SLUICE option	-	YES	
DOOR			
Door centre height / Door base height	mm	570 / 310	
	inch	22,4 /12,2	
Diameter	mm	373	
	inch	14,60	
POWER			
Motor	kW	1,1	
Electric heating (electric model)	kW	9	
Maximum electric power	kW	9,5	
Max. power steam & hot water model	kW	1,1	
CONNECTIONS		E	HW/S
Voltage 110V - 1 + N + E	Nº x mm2 / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm2 / A	3x10 / 50A	3x1,5 / 16A
	Nº x AWG / A	3x7 / 50A	3x15 / 15A
Voltage 230V - 3 + E	Nº x mm2 / A	4x4 / 32A	-
	Nº x AWG / A	4x11 / 30A	-
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x1,5 / 16A	-
	Nº x AWG / A	5x15 / 20A	-
Steam inlet (steam model)	inch	1/2"	
Max. steam consumption (steam model)	Kg/h	8,5	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm2	2-4	
Max. water consumption*	Lit/h	78,8*	
	GPH	20,8*	
Drain	inch	3"	
Drain capacity	Lit/min	200	
	GPM	52,8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	719 / 782	
	inch	28,3 / 30,78	
Net depth / Gross depth	mm	856 / 990	
	inch	33,7 / 38,9	
Net height / Gross height	mm	1.165 / 1.400	
	inch	45,8 / 55,1	
Net weight / Gross weight	kg	210 / 245	
	lb	462,97 / 540,1	

Packing volume	m3	1,08
	ft3	38,1

*Programme no.20, 75% load
**Programme no.2, 100% load
*** 400V version = 48kW / 230V = 36kW

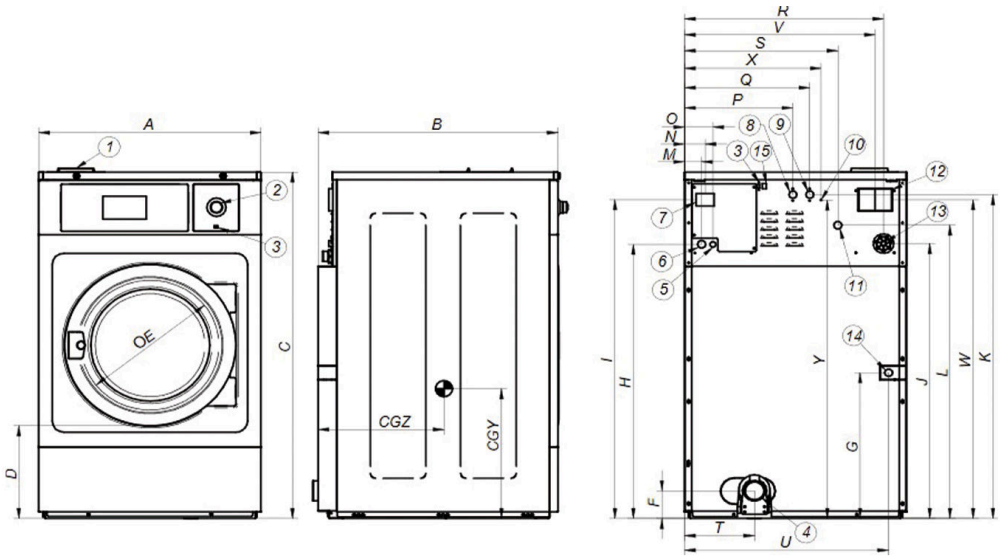

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Steam output
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-11	mm	719	755	1 165	310	373	144	440	886	1 054	889	1 073	958	61	74	101	316	376	637	475	211	654	607	1 053	416	1 053	383	511
WEN-14	mm	719	856	1 165	310	373	144	440	886	1 054	889	1 073	958	61	74	101	316	376	637	475	211	654	607	1 053	416	1 053	484	524