# DPR-10 ET2

## ET2 professional dryers

## EASY TOUCH 2

User friendly and totally programmable 4,3”
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard

## VERSATILITY

OPL <> COIN
SINGLE <> STACKED
Models can be stacked on top of a washer or on another dryer.
Control panel can be assembled between both drums for better ergonomics.
Ideal for multiple solutions: hotels, campings, coin laundries, gyms, etc.
Ready to be used with WET CLEANING programs

## FEATURES

Reduced drying times (less than 45 minutes)
6,75 kw heating, option 4,5 kw

## CONNECTIVITY

**IoT - Danube online standard.**
Managemant of laundries: OPL and COIN
Remote payment

## EFFICIENCY

Optimised airflow system
Axial airflow
Wide fluff filter as drawer
Efficient design

## ROBUSTNESS

Outer casing in grey skinplate
Robust aluminium big door
Industrial fan and powerful airflow
Sturdy construction of the dryer structure and panels

## OTHERS

Gas or electric heated models
Galvanized drum, grey skinplate panels
CE approved




## OPTIONS

- Ergonomics plinth WPR-DPR - skinplate (except BASIC)
- Ergonomics plinth WPR-DPR -Stainless steel (except BASIC)
- NG Natural gas heated tumble dryer (LPG as standard)
- SSD Stainless steel drum AISI-304
- SSC Stainless steel outer casing DPR AISI-304 (Except BASIC)
- RD reverse door opening (Except BASIC)
- CU control panel in the bottom (except BASIC)
- TR Tropicalized model (ET2)
- IMC CARE DRY Humidity control (ET2)
- FEX Sprinkler fire extinguisher DPR (ET2)
- AU AGA certification for gas dryers (Australia)
- Supl. 400V III /230 I/III 60HZ DPR 8-10
- Ergonomic plinth WPR-DPR - skinplate
- Supl 440-480V III 50/60 Marine DPR 8-10
- Ergonomic plinth WPR-DPR - stainless steel
- IoT licence - Danube Online
- Several payment systems for self-service

| CAPACITY & DRUM | UNIT. | DPR-10 ET2 | |
|---|---|---|---|
| Capacity 1/18 | Kg | 11,1 | |
| | lb | 24,5 | |
| Capacity 1/20 | Kg | 10 | |
| | lb | 22 | |
| Ø Drum | mm | 590 | |
| | inch | 23,2 | |
| Drum length | mm | 690 | |
| | inch | 27,2 | |
| Drum volume | l | 200 | |
| | cu ft | 7,06 | |
| Ø Door hole | mm | 480 | |
| | inch | 18,90 | |
| Door center height | mm | 554 | |
| | inch | 21,8 | |
| Height from floor to bottom of door | mm | 250 | |
| | inch | 9,84 | |
| ELECTRIC HEATING | | | |
| Evaporation capacity | L/h | 6,35 | |
| | US gallon/h | 1,68 | |
| Hourly output | Kg/h | 12,5 | |
| | lb/h | 27,56 | |
| Installed heating power | kW | 4,5 / 6,75 | |
| Installed electrical power | kW | 4,92 / 7,17 | |
| Drum motor power* | kW | 0,37 | |
| GAS HEATING | | | |
| Evaporation capacity | L/h | 6,35 | |
| | US gallon/h | 1,68 | |
| Hourly output | Kg/h | 12,5 | |
| | lb/h | 27,56 | |
| Installed gas heating power | kcal/h | 5761 | |
| | Btu/h | 22861 | |
| Installed gas heating power | kW | 6,70 | |
| Installed electrical power | kW | 0,42 | |
| Instant propane gas consumption (G31) | Kg/h | 0,57 | |
| | lb/h | 1,26 | |
| Instant natural gas consumption (G20) | $m^3/h$ | 0,71 | |
| | cfm | 0,42 | |
| Ø Gas inlet | BSPP ISO 228-1 | 1/2" | |
| VENTILATION | | | |
| Fan motor power* | kW | 0,37 | |
| Nominal air flow rate | $m^3/h$ | 300 | |
| | cfm | 177 | |
| Ø Fume exhaust | mm | 100 | |
| | inch | 3,94 | |
| HEAT EMISSION | | | |
| Maximum total heat emission | kW | 0,5 | |
| | Btu/h | 1536 | |
| Max. front heat emission | kW | 0,3 | |
| | Btu/h | 1075 | |
| CONNECTIONS | | E | G |
| Tension 230V - I + N + T | Nº x $mm^2$ / A | 3 x 10 / 40A | 3 x 1,5 / 10A |
| Tension 230V - III + T | Nº x $mm^2$ / A | 4 x 4 / 25A | 3 x 1,5 / 10A (1) |
| Tension 400V - III + N + T | Nº x $mm^2$ / A | 5 x 2,5 / 16A | 3 x 1,5 / 10A (2) |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Net / gross width | mm | 680 / 710 | |
| | inch | 26,8 / 28 | |

| | | |
|---|---|---|
| Net / gross depth | mm | 775 / 832 |
| | inch | 30,5 / 32,8 |
| Net / gross height | mm | 1.056 / 1.141 |
| | inch | 41,6 / 44,9 |
| Net / gross weight | Kg | 93 / 111 |
| | lb | 204 / 245 |
| OTHERS | | |
| Sound level | dB | 62 |

*Single motor for drum and fan
(1) connect 2 phases and earth
(2) connect phase, neutral and earth

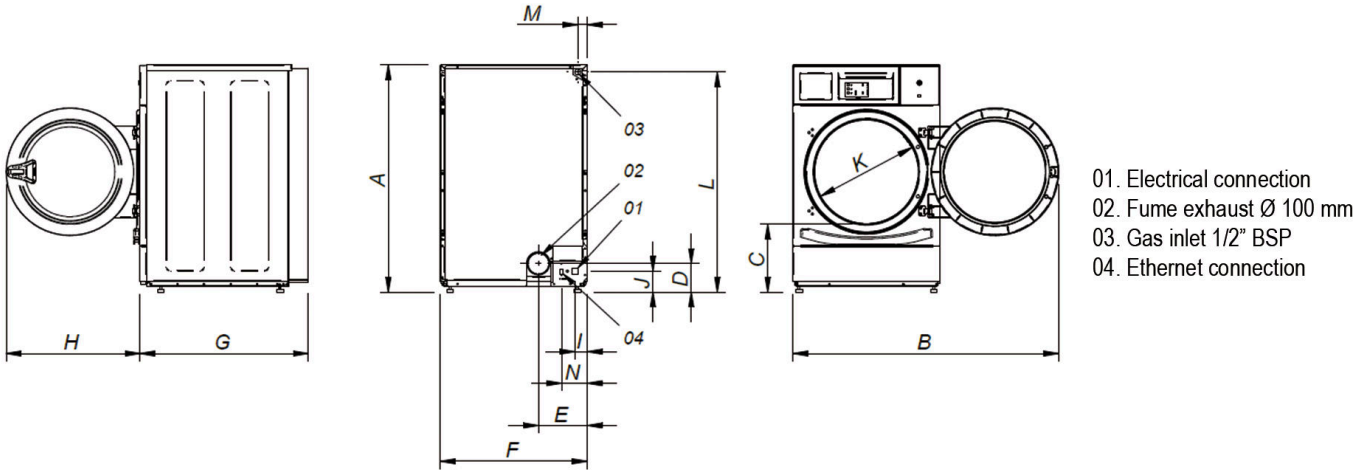


01. Electrical connection
02. Fume exhaust Ø 100 mm
03. Gas inlet 1/2" BSP
04. Ethernet connection

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DPR-8 | 1 056 | 1 227 | 320 | 140 | 226 | 680 | 775 | 615 | 57 | 91 | 480 | 1 015 | 50 | 118 |
| DPR-10 | 1 056 | 1 227 | 320 | 140 | 226 | 680 | 775 | 615 | 57 | 91 | 480 | 1 015 | 50 | 118 |