

## EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming, telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard

## G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

## EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings  
Ready for water recovery tanks AQUABAC

## VERSATILITY

ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard

## CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry  
Multi-payment system

## ERGONOMICS

Big aluminium door  
Easy door lock system

## MAINTENANCE

Hinged panel: easy access to parts  
Technical menu: statistics, errors...

## OTHERS

Free standing: no anchoring to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA for REG4 standards




## OPTIONS

- IoT licence - Danube Online
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Dosing pumps kits DQ-2, guide support included suitable up to 4 pumps
- RT Ready for AQUABAC conn. 3/4" for washers WEN/WED-11/14/18/22/28
- Additional dosing pump DB-1 (per unit)
- Kit External double drain 3" WED- 11
- P Drain-pump kit WED-11-14
- NC Normally closed valve WED-11
- RC AQUA FLOW water recirculation kit WED-11 (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-11-45C
- SG Silicon gasket WED-11-14
- RD reverse door opening
- TR Protected board ET2 for WED-35C and 45C (standard on 60 to 120 kg models)
- Steam kit WED-11 to 22 (to transform E or HW models to steam)
- Mops plinth stainless steel WED-11
- Mops plinth skinplate WED-11
- Self plinth same height of machine stainless steel WED-11
- Self plinth same height of machine skinplate WED-11
- Ergonomic plinth stainless steel WED-11
- 440V 3~ (No N) 50/60 Hz 11
- Ergonomic plinth skinplate WED-11
- SSC Stainless steel outer casing WED-11
- SSF Stainless steel front panel WED-11
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

DRUM	UNIT.	WED-11 ET2	
Capacity 1/9	Kg	11	
Capacity 1/10	Kg	10	
Volume	l	100	
Diameter	mm	532	
Depth	mm	425	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	50 / 1.300	
G Factor	-	500	
Maximum force transmitted	KN	2,08 ±0,75	
Frequency-dynamic force	Hz	16,7	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	KIT	
Weighing system / Tilting door	-	OPT./NO	
SLUICE option	-	N/A	
DOOR			
Height center door / Height door	mm	630/370	
Diameter	mm	373	
POWER			
Motor	kW	0,75	
Electric heating power	kW	6	
Total electric power (electric model)	kW	6,25	
Total electric power (hw, steam model)	barG	0,75	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm² / A	-	-
Tension 230V - I + N + T	Nº x mm² / A	2x6+T - 40A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm² / A	3x2,5+T - 20A	-
Tension 400V - III + N + T	Nº x mm² / A	4x1,5+T - 16A	-
Steam inlet (Steam model)	inch	1/2"	
Maximum steam consumption (Steam model)	Kg/h	7	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm²	2-4	
Maximum water consumption*	Lit/h	71,4*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	692 / 738	
Net Depth/Gross depth	mm	830 / 975	
Net Height / Gross height	mm	1.185 / 1.440	
Net weight / Gross weight	kg	198 / 230	
Volume	m³	1,03	

\* Program 60°, 75% load



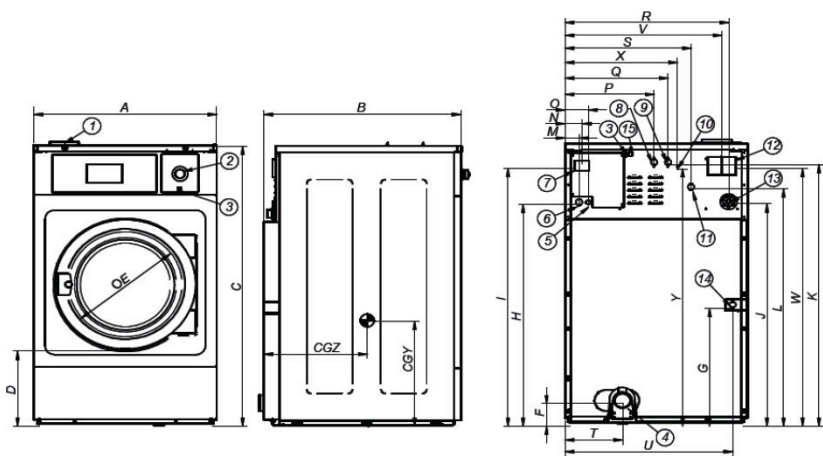

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-11	692	788	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	292	352	610	448	226	626	580	1.080	442	1.145	424	577
WED-14	788	869	1.307	440	373	243	385	1.034	1.202	1.037	1.221	1.106	61	74	101	385	445	706	544	243	718	676	1.202	485	1.201	450	651

