

STD-22 SILVER ET2

SILVER STD Stack dryers

EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. Online platform free of charge for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages

FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter
New PLUS gas heated model: more powerful to achieve more productivity

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

Danube Online communication - IoT standard
Remote technical service
Managemnt of laundries: OPL and COIN

ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters

MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components

OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except PLUS models and STD-22 model: only gas)
CE approved




OPTIONS

- IoT licence - Danube Online
- Several payment systems for self-service
- IMC CARE DRY Humidity sensor STD (1 unit per stack)
- DG Double door glass STD (1 unit per stack)
- FEX Sprinkler fire extinguisher STD (1 unit per stack)
- NG Natural gas heated tumble dryer (LPG as standard)
- TR Tropicalized model (ET2) (1 unit per stack)
- RD Opposite door opening STD (1 unit per stack)
- DS Perfumes dosing / spraying STD (1 unit per stack)
- AF Back panel with air filter (STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- 400V 3N 60 Hz STD-11-35
- 440V/480V 3~ 60 Hz STD-11-22
- SSC Stainless steel outer casing 22 STD
- SSF Stainless steel front panel STD 22
- WB Wooden packing STD-22

| CAPACITY AND DRUM | UNIT. | STD-22 SILVER ET2 |
|--|--------------------------|-------------------|
| Capacity 1/18 | Kg | 24,3 |
| | lb | 53,6 |
| Capacity 1/20 | Kg | 21,9 |
| | lb | 48,3 |
| Ø Drum | mm | 835 |
| | inch | 32,87 |
| Drum length | mm | 800 |
| | inch | 31,50 |
| Drum volume | l | 440 |
| | cu ft | 15,54 |
| Ø Door hole | mm | 575 |
| | inch | 22,64 |
| Door center height | mm | 547 / 1.618 |
| | inch | 22,60 / 63,70 |
| Height from floor to bottom of door | mm | 286 / 1.330 |
| | inch | 11,26 / 52,36 |
| ELECTRIC HEATING | | |
| Evaporation capacity | L/h | - |
| | US gallon/h | - |
| Hourly output | Kg/h | - |
| | lb/h | - |
| Installed heating power | kW | - |
| Installed electrical power | kW | - |
| Drum motor power | kW | 0,37 x2 |
| GAS HEATING | | |
| Evaporation capacity | L/h | 44 |
| | US gallon/h | 11,624 |
| Hourly output | Kg/h | 88 |
| | lb/h | 194 |
| Installed gas heating power | kcal/h | 26139 x2 |
| | Btu/h | 103658,5 x2 |
| Installed gas heating power | kW | 30,4 x2 |
| Installed electrical power | kW | 1,94 |
| Instant propane gas consumption (G31) | Kg/h | 2,61 x2 |
| | lb/h | 5,75 x2 |
| Instant natural gas consumption (G20) | m ³ /h | 3,22 x2 |
| | cfm | 1,89 x2 |
| Ø Gas inlet | BSPP ISO 228-1 | 3/4" |
| STEAM HEATING | | |
| Installed steam heating power | kW | - |
| | Btu/h | - |
| Installed electrical power | kW | - |
| Steam consumption (8 barG) - Standard | kg/h | - |
| Steam consumption (116 psiG) | lb/h | - |
| Steam pressure | barG | - |
| | psiG | - |
| Standard steam inlet - outlet | BSPT- ISO7.1 | - |
| Steam inlet - condensate outlet | NPT ANSI B1.20.1 Tapered | - |
| Steam consumption (5 barG) - Low Pressure | kg/h | - |
| Steam consumption (72,5 psiG) - Low Pressure | lb/h | - |
| Steam pressure (low pressure) | barG | - |
| | psiG | - |
| Low pressure steam inlet - outlet | BSPT- ISO7.1 | - |
| VENTILATION | | |
| Fan motor power | kW | 0,55 x2 |
| Nominal air flow rate | m ³ /h | 900 x2 |
| | cfm | 529,72 x2 |



| | | | |
|--|--------------|-----------------|--------------------|
| Ø Fume exhaust | mm | 250 | |
| | inch | 9,84 | |
| HEAT EMISSION | | | |
| Maximum total heat emission | kW | 2,6 | |
| | Btu/h | 8876,8 | |
| Max. front heat emission | kW | 1,9 | |
| | Btu/h | 6486,9 | |
| CONNECTIONS | | | |
| Tension 230V - I + N + T | Nº x mm² / A | E | G |
| Tension 230V - III + T | Nº x mm² / A | - | 3 x 2,5 / 20A |
| Tension 400V - III + N + T | Nº x mm² / A | - | 3 x 2,5 / 20A (1*) |
| | | - | 3 x 2,5 / 20A (2*) |
| NET DIMENSIONS / PACKING DIMENSIONS | | | |
| Net / gross width | mm | 870 / 950 | |
| | inch | 34,25 / 37,40 | |
| Net / gross depth | mm | 1.312 / 1.395 | |
| | inch | 51,65 / 54,92 | |
| Net height / gross height | mm | 2.118 / 2.250 | |
| | inch | 83,39 / 88,58 | |
| Net / gross weight | Kg | 373,5 / 388,5 | |
| | lb | 823,43 / 856,50 | |
| OTHERS | | | |
| Sound level | dB | 69 | |

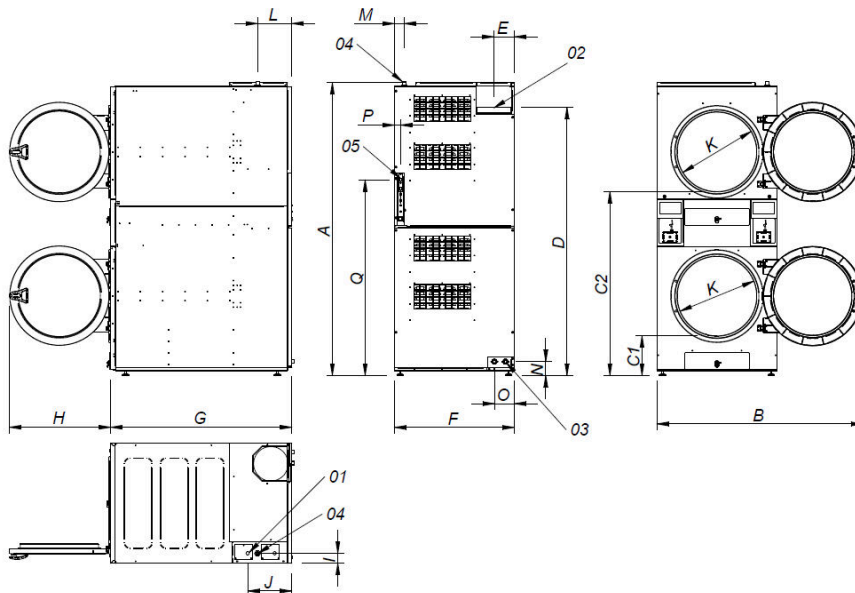

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø250
- 03 2 SPRINKLER VALVES 3/4"
- 04 GAS INLET 3/4
- 05 ETHERNET CONNECTION

| | A | B | C1 | C2 | D | E | F | G | H | I | J | K | L | M | N | O | P | Q |
|--------|-------|------|-----|------|------|-----|-----|------|-----|----|-----|-----|-----|----|-----|-----|----|------|
| STD-22 | 2118* | 1490 | 286 | 1330 | 1940 | 149 | 870 | 1312 | 735 | 73 | 320 | 575 | 250 | 70 | 100 | 145 | 45 | 1416 |

* Measurement with legs mounted (30mm)

