

WED-35C ET2

High spin washers

EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...

OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards




OPTIONS

- IoT licence - Danube Online
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Dosing pumps kits DQ-2, guide support included suitable up to 4 pumps
- Additional dosing pump DB-1 (per unit)
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-35C/45C
- DD Double drain kit WED-35C-45C
- NC Normally closed valve WED-35C
- RC AQUA FLOW water recirculation kit WED-35C-45C (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-11-45C
- RD reverse door opening
- TR Protected board ET2 for WED-35C and 45C (standard on 60 to 120 kg models)
- Steam kit WED-28/35C/45C (to transform E or HW models to steam)
- Ergonomic plinth stainless steel WED-35C
- Ergonomic plinth skinplate WED-35C
- SSC Stainless steel outer casing WED-35C
- SSF Stainless steel front panel WED-35C
- Supl 440V III 50/60 de 35 kg
- 230V III 50/60 - 35/45 kg
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

DRUM	UNIT.	WED-35C ET2	
Capacity 1/9	Kg	39	
Capacity 1/10	Kg	35	
Volume	l	350	
Diameter	mm	860	
Depth	mm	602	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	42,5 / 966	
G Factor	-	450	
Maximum force transmitted	KN	7,36 ±2,45	
Frequency-dynamic force	Hz	14,3	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting door	-	OPT./NO	
SLUICE option	-	N/A	
DOOR			
Height center door / Height door	mm	885 / 540	
Diameter	mm	560	
POWER			
Motor	kW	6	
Electric heating power	kW	21	
Total electric power (electric model)	kW	22	
Total electric power (hw, steam model)	barG	6	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm ² / A	-	-
Tension 230V - I + N + T	Nº x mm ² / A	-	-
Tension 230V - III + T	Nº x mm ² / A	3x16+T - 63A	3x4+T - 32A
Tension 400V - III + N + T	Nº x mm ² / A	4x6+T - 40A	4x1,5+T - 16A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	18	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm ²	2-4	
Maximum water consumption*	Lit/h	261,3*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	1.095 / 1.205	
Net Depth/Gross depth	mm	1.184 / 1.330	
Net Height / Gross height	mm	1.730 / 1.850	
Net weight / Gross weight	kg	750 / 820	
Volume	m ³	2,7	

* Program 60°, 75% load



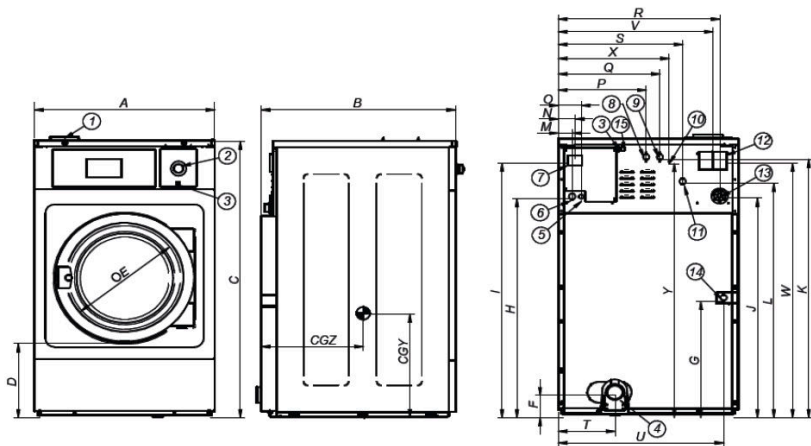

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-35C	1.095	1.184	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	732
WED-45C	1.095	1.304	1.600	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	800

