

STD-11 BASIC EM BASIC STD Stack dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Galvanized drum
Frequency inverter as standard



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (option)



OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except PLUS model and STD-22 model: only gas)
CE approved




OPTIONS

- BMS New display for EM programmer (2 units for STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- NG Natural gas heated tumble dryer (LPG as standard)
- WB Wooden packing STD-11
- 400V 3~ 50 Hz STD-11-18
- 400V 3N 60 Hz STD-11-35
- 230V 3~ 60 Hz STD-11-18 G
- 230V 3~ 60 Hz STD-11-18 E
- 440V/480V 3~ 60 Hz STD-11-22
- Several payment systems for self-service

CAPACITY AND DRUM	UNIT.	STD-11 BASIC EM
Capacity 1/18	Kg	11,7
	lb	25,7
Capacity 1/20	Kg	10,5
	lb	23,1
Ø Drum	mm	750
	inch	29,53
Drum length	mm	475
	inch	18,70
Drum volume	l	210
	cu ft	7,41
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	547 / 1.522
	inch	21,54 / 59,92
Height from floor to bottom of door	mm	189 / 1.164
	inch	7,32 / 45,83
ELECTRIC HEATING		
Evaporation capacity	L/h	15,8
	US gallon/h	4,17
Hourly output	Kg/h	31,6
	lb/h	69,7
Installed heating power	kW	12 x2
Installed electrical power	kW	25,34
Drum motor power	kW	0,37 x2
GAS HEATING		
Evaporation capacity	L/h	15,3
	US gallon/h	4,042
Hourly output	Kg/h	30,6
	lb/h	67,5
Installed gas heating power	kcal/h	10327 x2
	Btu/h	40945,7 x2
Installed gas heating power	kW	12 x2
Installed electrical power	kW	1,34
Instant propane gas consumption (G31)	Kg/h	1,03 x2
	lb/h	2,27 x2
Instant natural gas consumption (G20)	m ³ /h	1,27 x2
	cfm	0,75 x2
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	-
	Btu/h	-
Installed electrical power	kW	-
Steam consumption (8 barG) - Standard	kg/h	-
Steam consumption (116 psiG)	lb/h	-
Steam pressure	barG	-
	psiG	-
Standard steam inlet - outlet	BSPT- ISO7.1	-
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	-
Steam consumption (5 barG) - Low Pressure	kg/h	-
Steam consumption (72,5 psiG) - Low Pressure	lb/h	-
Steam pressure (low pressure)	barG	-
	psiG	-
Low pressure steam inlet - outlet	BSPT- ISO7.1	-
VENTILATION		
Fan motor power	kW	0,25 x2
Nominal air flow rate	m ³ /h	500 x2
	cfm	294,28 x2



Ø Fume exhaust	mm	200 x2	
	inch	7,78 x2	
HEAT EMISSION			
Maximum total heat emission	kW	2,4	
	Btu/h	8193,9	
Max. front heat emission	kW	1,68	
	Btu/h	5735,8	
CONNECTIONS			
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A (1*)
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A (2*)
NET DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	785 / 865	
	inch	30,91 / 34,06	
Net / gross depth	mm	972 / 1.055	
	inch	38,27 / 41,54	
Net height / gross height	mm	1.980 / 2.126	
	inch	77,95 / 83,70	
Net / gross weight	Kg	260 / 268	
	lb	573,20 / 590,84	
OTHERS			
Sound level	dB	64	

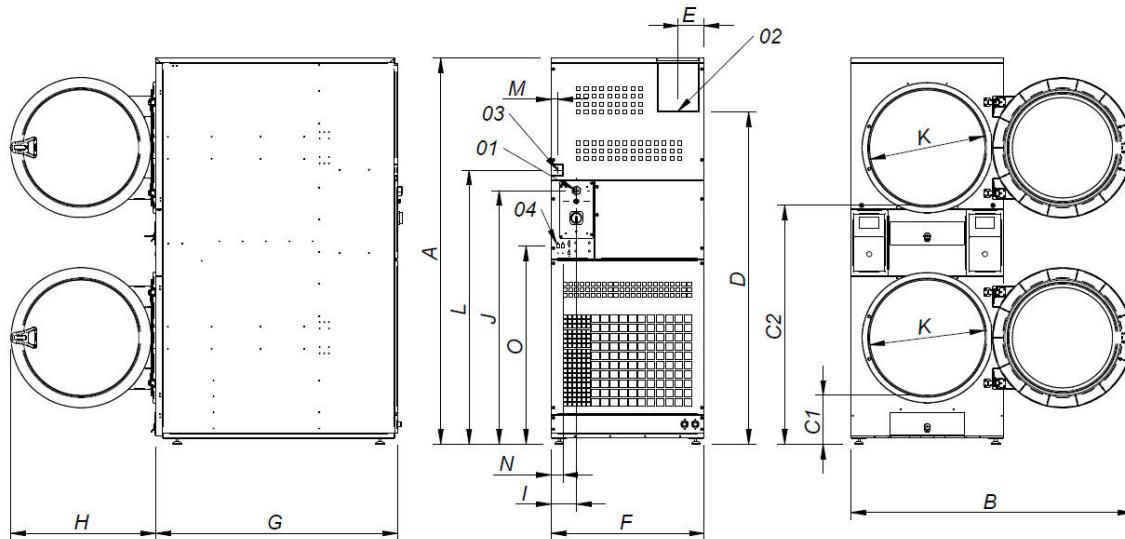

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 GAS INLET 1/2
- 04 ETHERNET CONNECTION (only available with ET2 models)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
STD-11	1980*	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1018
STD-14	1980*	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1018
STD-18	1980*	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1018

* Measurement with legs mounted (30mm)

