
GII-26 ET2
ø 650 mm flatwork ironers

EASY TOUCH 2

7” touch screen fully programmable
37 available languages, 5 preset programs
USB connection: to import and export data or programs, update machines without Internet connection

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
Automatic shutdown at 80°C (adjustable parameter)
Model with gas radiant burners: +25% productive
CARE IRON: automatic regulation of ironing speed according to residual moistre as standard
HPS: high production system, ironing speed up to 15 m/min as standard (not compatible with folder)

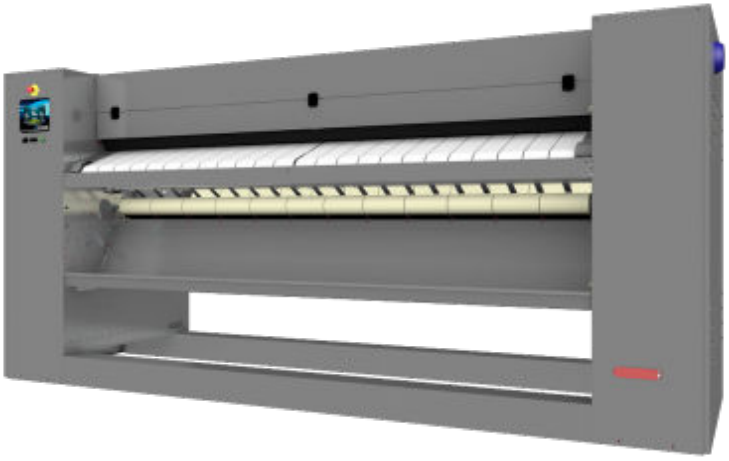

ROBUSTNESS

Roll driving by speed inverter
Nomex quality ironing belts: high temperatures resistant
Panels in skinplate
Nickel plate roll as option: anticorrosive, more durable

ERGONOMICS

Acoustic comfort : <65 dB
Appropriate operating height: 1170 mm feeding belts
Compact dimensions

MAINTENANCE

Easy access to all components on both sides of the machine
Complete technical menu: statistics, autotest, data recovery for technician and maintenance
Remote communication: faster intervention

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation
Front feeding and return
Built-in cool down system
Polished steel roll ø 650 mm
Working widths: 2000, 2600 and 3300 mm
Electric, radiant gas or steam heating
CE standard


OPTIONS


- NI Nickel plate roll GII-26 (except steam model)
- LPG Propan gas for radiant gas model
- NG Natural gas for radiant gas model
- LF Built-in lengthwise folder GII-26 (front exit)
- LFRE Built-in lengthwise folder GII-26 (front and rear exit)
- SRE Standard rear exit GII-26 (model without folder)
- HT No drop tray (laundry recovery) GII-26
- AB Antistatic ironing belts GII-26
- FA Antistatic ironing belts + ionizing bar GII-26 for folder
- Levelling feet ø 500 / 650 mm flatwork ironers
- Feeding tray GII-26
- 3Z Identification of three ironing areas ø 500/650 mm
- PL Cross folder CPL-CROSS 260
- WM Maritime Wood packaging for GII-26
- 230V III 50-60Hz GII-26 E
- 230V III 60Hz GII-26 GR
- 440V III 50-60Hz GII-26 E
- 120V I N 60Hz gas US GII-26


GENERAL DETAILS	UNIT.	GII-26 ET2	
Theoretical output Electric heating* standard mod. front or rear exit	Kg/h	115	
	lb/h	254	
Theoretical output Electric heating* mod. Folder front exit	Kg/h	81	
	lb/h	177	
Theoretical output Electric heating* mod. Folder front and rear exit	Kg/h	75	
	lb/h	165	
Theoretical production Gas atmo heating*	Kg/h	N/A	
	lb/h	N/A	
Theoretical production Radiant gas heating* mod standard front or rear exit	Kg/h	132	
	lb/l	291	
Theoretical production Radiant gas heating* mod folder front exit	Kg/h	92	
	lb/l	204	
Theoretical production Radiant gas heating* mod folder front and rear exit	Kg/h	86	
	lb/l	189	
Roll Ø	mm	650	
	inch	25,59	
Working width	mm	2.600	
	inch	102,36	
Height floor-feeding belts	mm	1.170	
	inch	46,06	
Working speed standard mod.	m/min	0,5 - 15	
	ft/min	1,6 - 49	
Working speed mod. with folder	m/min	2 - 10	
	ft/min	6,5 - 32	
Electronic control	-	ET2	
No. Programs	-	5	
Lenght folder	-	OPT.	
Rear exit	-	OPT.	
Large surface contact with linen	-	305°	
POWER			
Roll motor power	Kw	0,61	
Fan motor power	Kw	0,5	
Electric mod.: heating power	Kw	54	
Electric mod: Total electric power	Kw	55,11	
Gas mod.: heating power	Kw	69	
Gas mod.: total electric power	Kw	1,11	
Steam mod.: heating power	Kw	76	
Steam mod.: total electric power	Kw	1,11	
Steam consumption	Kg/h	80	
Additional electric power standard mod. Rear exit	Kw	0,28	
Additional electric power mod with folder front exit	Kw	0,56	
Additional electric power mod with folder front and rear exit	Kw	0,66	
CONNECTIONS		E	G/S
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 10A
	nº x AWG/A	N/A	3 x 13 / 10A
Tension 230V - III + T	Nº x mm² / A	4 x 35 / 160A	4 x 2,5 / 10A
	nº x AWG/A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V - III + N + T	Nº x mm² / A	5 x 25 / 100A	5 x 2,5 / 10A
	nº x AWG/A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	3710 / 3890	
	inch	146,1 / 153,1	
Net depth (with rear exit open) / gross depth	mm	1175 (1507) / 1360	
	inch	46,3 (59,3) / 53,5	


Net height / gross height	mm	1780 / 1940
	inch	70,1 / 76,4
Net weight / gross weight standard mod.	kg	1717 / 1797
	lbs	3785 / 3962
Net weight / gross weight standard mod. with rear exit	kg	1757 / 1837
	lbs	3874 / 4050
Net weight / gross weight mod. Folder front exit	kg	1812 / 1892
	lbs	3995 / 4171
Net weight / gross weight mod. Folder front and rear exit	kg	1872 / 1952
	lbs	4127 / 4303
Net volume (with rear exit) / Gross volume	m^3	7,76 (9,53) / 10,26
	f^3	274 (336,42) / 362
OTHERS		
No. Fume outlet	Nº	2
Ø Fume outlet	mm	153
	inch	6,0
Air Flow	m^3/h	1.200
	cfm	706
Sound level	dB	65
Evaporation power standard mod.	l/h	59
	USgallon/h	15,7
Evaporation power mod. Folder front exit	l/h	42
	USgallon/h	11
Evaporation power mod. Folder front and rear exit	l/h	39
	USgallon/h	10,2


* Theoretical production with 45% moisture

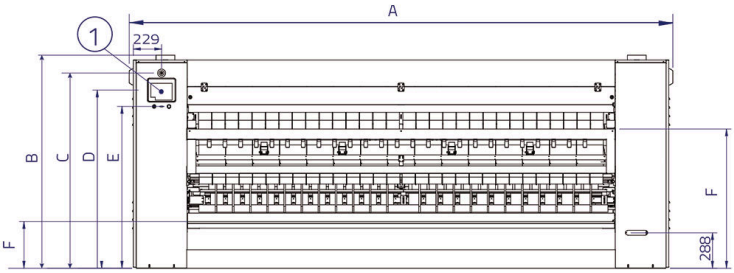



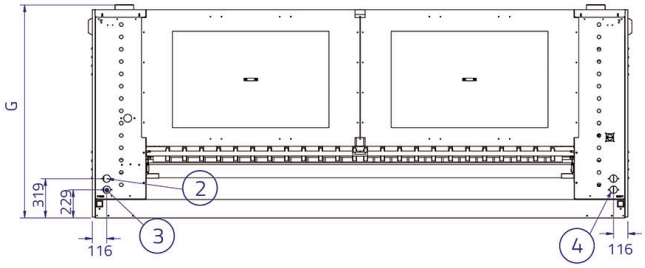



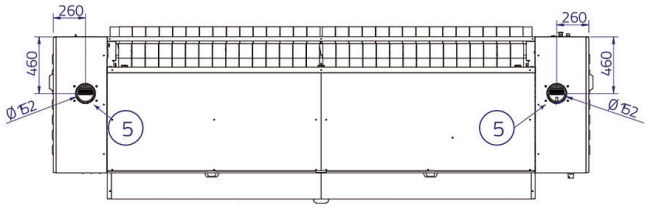

1. ET2 control with touchscreen
2. Steam outlet ø 1/2”
3. Gas inlet ø 1/2“ or steam ø 3/4”
4. Electrical connection
5. Fume exhaust (Outlet ø 153 ext)
6. Disconnector

	A	B	C	D	E	F	G	H
GII-20 ET2	3 110	1 780	1 584	1 445	1 313	379	1 175	1 507
GII-26 ET2	3 710	1 780	1 584	1 445	1 313	379	1 175	1 507
GII-33 ET2	4 410	1 780	1 584	1 445	1 313	379	1 175	1 507