FEATURES

B-2

• Electric steam boiler with steam iron.
• Small, thermically insulated, electric steam boiler.
• Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kw.
• Manually operated water feeding (drinking water required for its functioning).
• Automatic pressure control by thermostat with fixed setting.
• Mobile trolley as option.



SB-5

• Stainless steel electric steam boiler with electric steam iron.
• Boiler capacity 5 lt, heater 1,45 kw.
• Water level indicator with warning light for empty boiler.
• Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
• Manual water feed.
• Mobile trolley as option.

SB-24

ELECTRIC AND AUTOMATIC CENTRAL STEAM BOILER


• Automatic water feeding or ready to be connected to a condensate tank.
• Power available 12 or 22 kw, one set of heaters.
• Steam production: 16 or 29 kg/h.
• Boiler shell manufactured in accordance to the current PED regulations.
• Steam working pressure: 1 - 7 bar
• Boiler capacity 24,9 lt.
• Voltage 400V III+N / 230V III 50-60 Hz



OPTIONS

• 5 feet trolley + wheels B-2

GENERAL DATA	UNIT.	B-2
Power supply	V	230 V 1 50 Hz
Boiler energy consumption	kW	1
Iron energy consumption	kW	0,830
Boiler capacity	L	1,75
Boiler Heater	kW	1
Iron Heater	kW	0,830
Autonomy	h	2-3
Maximum steam pressure	bar	2,60
Steam production	kg/h	-
Pump motor power	HP	-
Sound level	dB	<70
Operating temperature	°C	5 - 80 ºC
Operating humidity	%	90
Storage temperature:	°C	-20 / +50°C
CONNECTIONS		
Water feeding inlet	Inch	-
Boiler exhaust	Inch	-
Steam inlet	Inch	-
Condensate return with valve	Inch	-
DIMENSIONS		
Net width	mm	230
Net depth	mm	420
Net height (without pole)	mm	300
Net weight	kg	8
Gross width	mm	600
Net depth	mm	440
Gross height	mm	450
Gross weight	kg	9

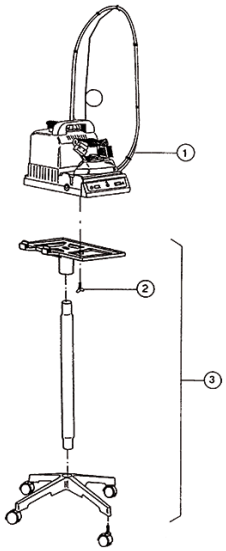

1. Steam generator with iron
2. Screw securing the generator to the trolley
3. Stand with wheels (optional)