

# SP600-2600

## SP compact ironers

### FEATURES

SP models are ironers that dries, irons and folds with a lengthwise folder making up to two length folds.

- Roll dimensions: working width 2m60 and 3m30, ø 600, 800 or 1000 mm.
- 1 or 2 length folds with 2 independent lanes
- Folding by photocells and compressed air
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with temperature and speed control:
  - between 3 and 10 m/min (ø 600 mm)
  - between 3 and 13 m/min (ø 800 mm)
  - between 4 and 18 m/min (ø 1000 mm)
- Big output capacity: depending on the residual moisture of the linen, straight from a high spin washer extractor:
  - up to 140 kg/h (ø 600 mm)
  - up to 220 kg/h (ø 800 mm)
  - up to 290 kg/h (ø 1000 mm)
- Electric, gas or steam heating
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar






### OPTIONS

- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (without vacuum feeding belts)
- Rear exit with table + by pass
- Crossfolder CPL-CROSS 260 + stacker for SP
- Crossfolder CPL-CROSS 330 + stacker for SP
- Motorized rear exit - height 860 mm. includes rear exit
- Small pieces back collector: 2 lanes for SP
- Small pieces back collector: 4 lanes for SP
- By-pass
- Double air pressure in length folds for thicker linen
- Linen reject system (dirty or torn)
- Different voltage from 400V III +N 50Hz
- Maritime packing for SP

GENERAL DATA	UNIT.	SP600-2600
Theoretical production* elec/steam/atm. Gas heating	Kg/h	125
Theoretical production* radiant gas burner	Kg/h	-
Ø Roll	mm	600
Working width	mm	2.600
Height floor-feeding	mm	1.050
Working speed	mt/min	3-10
Control type	-	Digital
Nº of programs	Nº	20
FOLDING		
1 lane - lengthfold	Nº	1-2
2 lanes - lengthfold	Nº	1-2
POWER		
Electric heating	kW	54
Max. electric power electric heating	kW	55,9
Gas heating (natural / LPG)	kW	63,30 / 67,40
Max. electric power gas heating	kW	1,9
Steam heating	kW	55
Max. electric power steam heating	kW	1,9
CONNECTIONS		
Ø Gas inlet	BSP	1"
Ø Steam inlet (12 bar max.)	BSP	1"
Ø Condensed (steam models)	BSP	1/2"
Ø Air inlet	BSP	12
DIMENSIONS / PACKAGING DIMENSIONS		
Net width / gross width	mm	3.670 / 3.830
Net depth / gross depth	mm	1.440 / 1.620
Net height / gross height	mm	2.030 / 1.960
Net weight / gross weight	Kg	2.050 / 2.300
Volume	m3	10,73 / 12,16
OTHERS		
No. Fume outlet	Nº	2
Ø Fume outlet	mm	120
Extraction rate	m3/h	2 x 1.000
Compressed air consumption (6,5 bar)	mm	7.000
Sound Level	dB	70

\*50% residual moisture, 140gr / m2 cotton,100% roll use

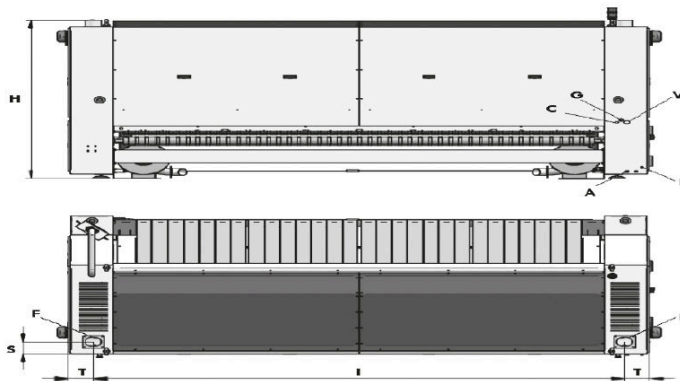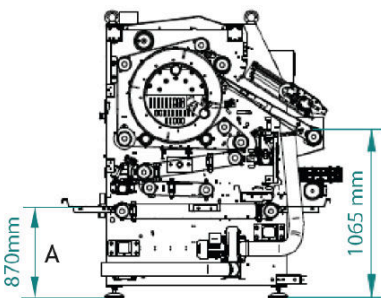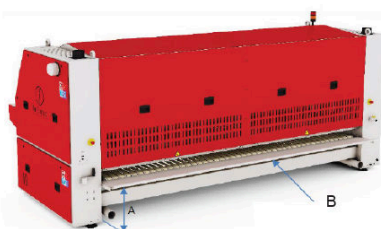

- A. Compressed air inlet
- B. Rear collector
- C. Condensed discharge (steam model)
- E. Electrical connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
SP600-2600	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
SP600-3300	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"

