



## EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming,  
telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard



## G FACTOR

High G factor: reduced residual moisture, reduced drying time,  
energy savings



## EFFICIENCY

Optimized consumption: automatic or manual adjustment of  
water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings  
Ready for water recovery tanks AQUABAC



## VERSATILITY

ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard



## CONNECTIVITY

Communication Danube Online - IoT as standard  
Remote technical service  
Management of laundry  
Multi-payment system



## ERGONOMICS

Big aluminium door  
Easy door lock system



## MAINTENANCE

Hinged panel: easy access to parts  
Technical menu: statistics, errors...



## OTHERS

Free standing: no anchoring to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA for REG4 standards



## OPTIONS


- 440V 3~ (No N) 50/60 Hz 45C
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-35C/45C
- DD Double drain kit WED-35C-45C
- NC Normally closed valve WED-45C
- Kit WATERMARK Australia
- RC AQUA FLOW water recirculation kit WED-35C-45C (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-11-45C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-28-35C-45C (to transform E or HW models to steam)
- SSC Stainless steel outer casing WED-45C
- 230V 3~ 50/60Hz 45C
- IoT licence - Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

DRUM		UNIT.	WED-45C ET2
Capacity 1/9		Kg	50
Capacity 1/10		Kg	45
Volume		l	450
Diameter		mm	860
Depth		mm	720
GENERAL DETAILS			
Washing speed / Spining speed		r.p.m.	42,5 / 966
G Factor		-	450
Maximum force transmitted		KN	7,36 ±2,45
Frequency-dynamic force		Hz	14,3
Noise level		dB	< 70
Coin laundry version		-	YES
Double drain		-	OPT.
Weighing system		-	OPT.
Tilting system		-	NO
DOOR			
Height door bottom		mm	698
Diameter		mm	560
POWER			
Motor		kW	6
Electric heating power		kW	21
Total electric power (electric model)		kW	22
Total electric power (hw, steam model)		barG	6
CONNECTIONS		E	HW/S
Tension 110V - I + N + T		Nº x mm <sup>2</sup> / A	-
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	-
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	3x16+T - 63A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	4x6+T - 40A
Steam inlet (Steam model)		inch	3/4"
Maximum steam consumtion (Steam model)		Kg/h	18
Water inlet		inch	3/4"
Water main pressuer		Kgs/cm <sup>2</sup>	2-4
Maximum water consumption*		Lit/h	335,9*
Drain		mm/inch	3"
Drainage capacity		Lit/min	200
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width		mm	1.095 / 1.205
Net Depth/Gross depth		mm	1.304 / 1.440
Net Height / Gross height		mm	1.767 / 1.850
Net weight / Gross weight		kg	747 / 853
Volume		m <sup>3</sup>	3,3

\* Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.

\*\* 400V version / 230V version



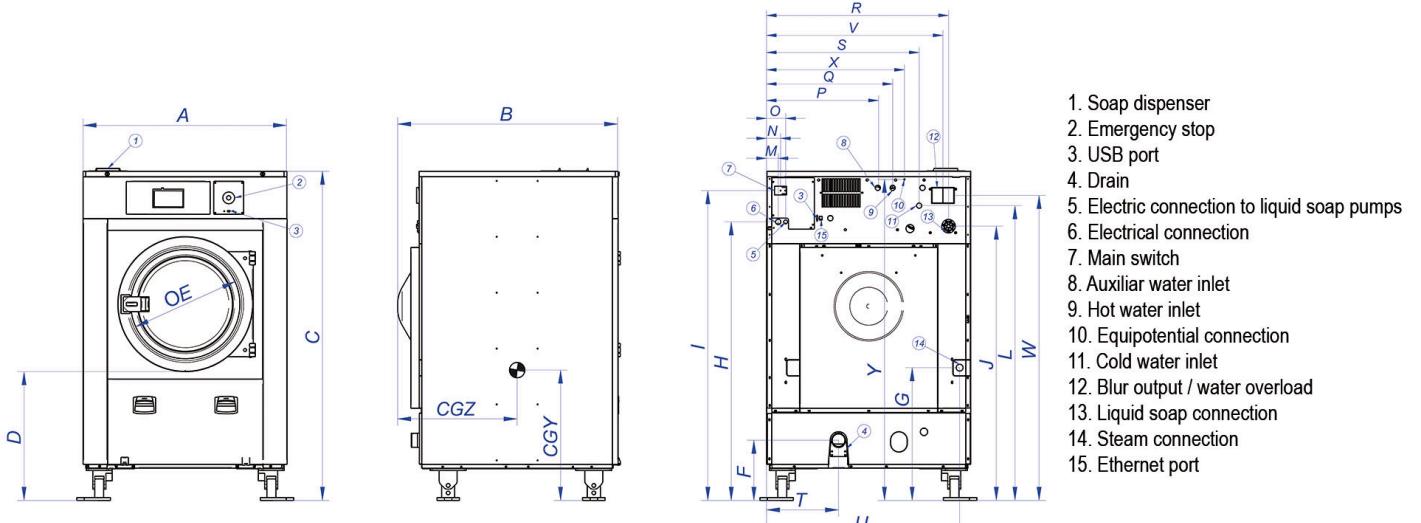

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
<b>WED-35C</b>	mm	1 095	1 184	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	732
<b>WED-45C</b>	mm	1 095	1 304	1 767	698	560	328	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	800

