



7" touch screen, user-friendly and fully programmable Connection USB. Free software online for programming, telemetry, data analysis... Videos display (ads, instructions...)

37 available languages 8 dosing signals as standard

**G FACTOR** 

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load Water Saving system: 3 configuable levels of savings Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER MAKE TO ORDER: possibility to customize WET CLEANING as standard

CONNECTIVITY

**Communication Danube Online - IoT as standard** 

Remote technical service Management of laundry Multi-payment system

ERGONOMICS

Big aluminium door Easy door lock system

**MAINTENANCE** 

Hinged panel: easy access to parts Technical menu: statistics, errors...

**OTHERS** 

Free standing: no anchoring to the floor Stainless steel vat and drum, skinplate outer casing 3 water inlets

Detergents box with compartments Imbalance controlled by frequency inverter CE standards and KIWA for REG4 standards



## **OPTIONS**


- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-35C/45C
- DD Double drain kit WED-35C-45C
- NC Normally closed valve WED-45C
- Kit WATERMARK Australia
- RC AQUA FLOW water recirculation kit WED-35C-45C (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-11-45C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-28-35C-45C (to transform E or HW models to steam)
- SSC Stainless steel outer casing WED-45C
- 440V 3~ (No N) 50/60 Hz 45C
- 230V 3~ 50/60Hz 45C
- IoT licence Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

DRUM	UNIT.	WED-4	5C ET2				
Capacity 1/9	Kg	5	0				
Capacity 1/10	Kg	4	5				
Volume	I	45	50				
Diameter	mm	86	50				
Depth	mm	72	20				
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	42,5	/ 966				
G Factor	-	45	50				
Maximum force transmitted	KN	7,36	±2,45				
Frequency-dynamic force	Hz	14	1,3				
Noise level	dB	<	70				
Coin laundry version	-	YI	ES .				
Double drain	-	OF	PT.				
Weighing system	-	OF	PT.				
Tilting system	-	N	0				
DOOR							
Height door bottom	mm	69	98				
Diameter	mm	56	50				
POWER							
Motor	kW	(	5				
Electric heating power	kW	2	1				
Total electric power (electric model)	kW	2	2				
Total electric power (hw, steam model)	barG	(	5				
CONNECTIONS		Е	HW/S				
Tension 110V - I + N + T	Nº x mm² / A	-	-				
Tension 230V - I + N + T	Nº x mm² / A	-	-				
Tension 230V - III + T	№ x mm² / A	3x16+T - 63A	3x4+T - 32A				
Tension 400V - III + N + T	Nº x mm² / A	4x6+T - 40A	4x1,5+T - 16A				
Steam inlet (Steam model)	inch	3/	4"				
Maximum steam consumtion (Steam model)	Kg/h	1	8				
Water inlet	inch	3/	4"				
Water main pressuer	Kgs/cm²		-4				
Maximum water consumption*	Lit/h	5,9*					
Drain	mm/inch	3"					
Drainage capacity	Lit/min 200						
DIMENSIONS / PACKING DIMENSIONS							
Net Width/Gross width	mm	1.095	/ 1.205				
Net Depth/Gross depth	mm	1.304	/ 1.440				
Net Height / Gross height	mm	1.767	/ 1.850				
Net weight / Gross weight	kg	747	/ 853				
Volume	m³	3	,3				

<sup>\*</sup> Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.



<sup>\*\* 400</sup>V version / 230V version

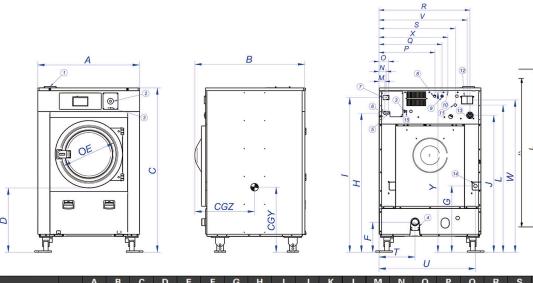

- 1. Soap dispenser
  2. Emergency stop
  3. USB port
  4. Drain
  5. Electric connection to liquid soap pumps
  6. Electrical connection
  7. Main switch
  8. Auviliar water inlet
- 8. Auxiliar water inlet
- 8. Auxiliar water inlet
  9. Hot water inlet
  10. Equipotential connection
  11. Cold water inlet
  12. Steam output
  13. Liquid soap connection
  14. Steam connection
  15. Ethernet port

		Α	В	С	D	E	F	G	н	1	J	K	L	M	N	0	P	Q	R	S	T	U	V	w	Х	Υ	CGY	CGZ
WED-35C	mm	1 095	1 184	1 767	698	560	158	712	1 500	1 668	1 501	1 683	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	732
WED-45C	mm	1 095	1 304	1 767	698	560	158	712	1 500	1 668	1 331	1 513	1 587	61	74	101	596	676	976	808	384	1 037	946	1 472	740	1 723	965	800

