

DD-35 BASIC EM BASIC dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Galvanized drum as standard
Frequency inverter as standard



EFFICIENCY

Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Big door diameters
Opening sense of door adjustable on site




MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components



OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved

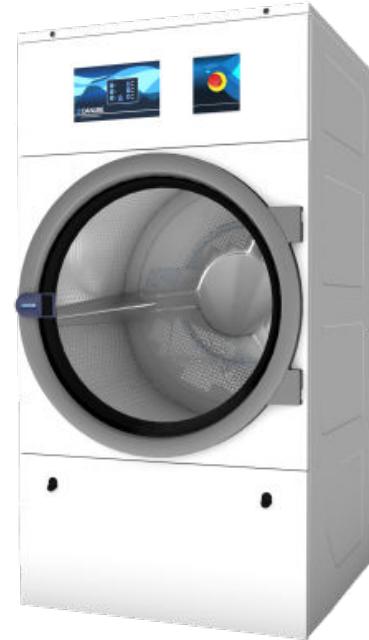


OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DD-35 BASIC EM
Capacity 1/18	Kg	36,7
	lb	80,8
Capacity 1/20	Kg	33
	lb	72,8
Ø Drum	mm	947
	inch	37,28
Drum length	mm	936
	inch	36,85
Drum volume	l	660
	cu ft	23,30
Ø Door hole	mm	802
	inch	31,57
Door center height	mm	1.040
	inch	40,94
Height from floor to bottom of door	mm	578
	inch	22,74
ELECTRIC HEATING		
Evaporation capacity	L/h	31,50
	US gallon/h	8,2
Hourly output	Kg/h	60
	lb/h	132,3
Installed heating power	kW	36
Installed electrical power	kW	37,15
Drum motor power	kW	0,55
GAS HEATING		
Evaporation capacity	L/h	32,1
	US gallon/h	8,480
Hourly output	Kg/h	63,9
	lb/h	140,9
Installed gas heating power	kcal/h	35276
	Btu/h	139986,5
Installed gas heating power	kW	41
Installed electrical power	kW	1,15
Instant propane gas consumption (G31)	Kg/h	3,51
	lb/h	7,74
Instant natural gas consumption (G20)	m ³ /h	4,34
	cfm	2,55
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	-
	Btu/h	-
Installed electrical power	kW	-
Steam consumption (8 barG) - Standard	kg/h	-
Steam consumption (116 psiG)	lb/h	-
Steam pressure	barG	-
	psiG	-
Standard steam inlet - outlet	BSPT- ISO7.1	-
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	-
Steam consumption (5 barG) - Low Pressure	kg/h	-
Steam consumption (72,5 psiG) - Low Pressure	lb/h	-
Steam pressure (low pressure)	barG	-
	psiG	-
Low pressure steam inlet - outlet	BSPT- ISO7.1	-
VENTILATION		
Fan motor power	kW	0,55
Nominal air flow rate	m ³ /h	1.200
	cfm	706,29



Ø Fume exhaust	mm	200		
Ø Fume exhaust	inch	7,87		
HEAT EMISSION				
Maximum total heat emission	kW	3,6		
	Btu/h	12290,9		
Max. front heat emission	kW	2,52		
	Btu/h	8603,6		
CONNECTIONS				
Tension 230V - I + N + T	Nº x mm² / A	-	E	G
Tension 230V - III + T	Nº x mm² / A	4 x 50 / 125A		3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A		3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width	mm	985 / 1.065		
	inch	38,78 / 41,93		
Net / gross depth	mm	1.210 / 1.310		
	inch	47,64 / 51,57		
Net height / gross height without heating	mm	1.975 / 2.080		
	inch	77,76 / 81,89		
Net / gross weight	Kg	260 / 285		
	lb	573,20 / 628,32		
OTHERS				
Sound level	dB	65		

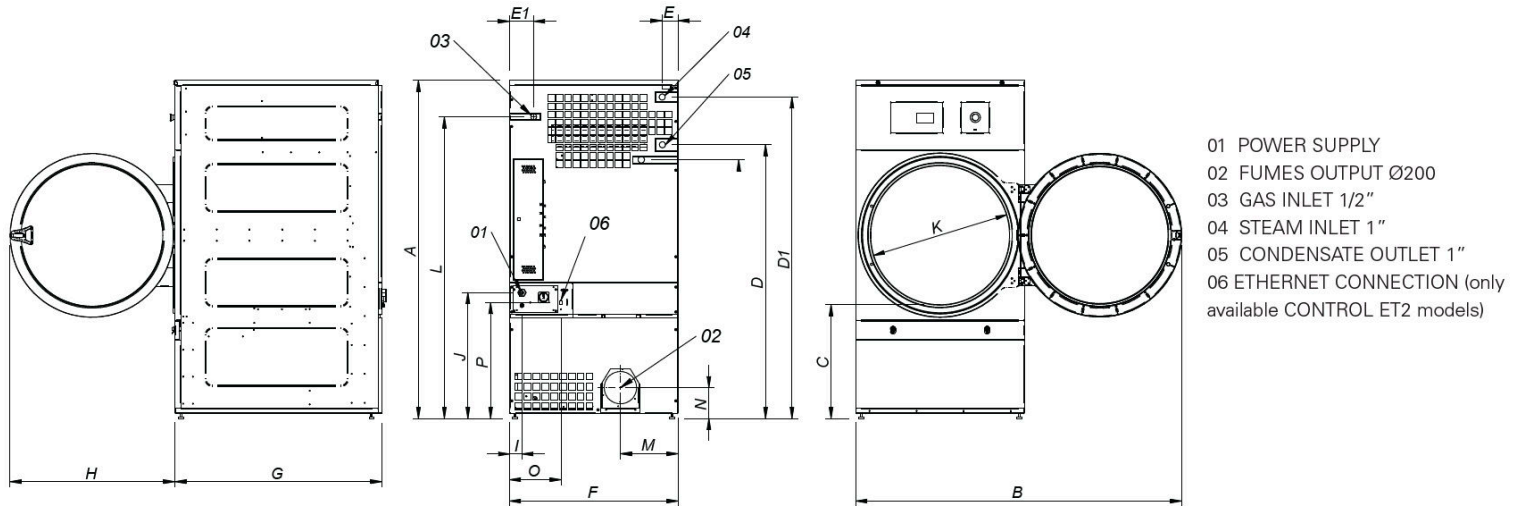

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DD-35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676

* Measurement with legs mounted (30mm)

