

DD-35 BASIC EM BASIC dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Galvanized drum as standard
Frequency inverter as standard



EFFICIENCY

Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Big door diameters
Opening sense of door adjustable on site




MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components



OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved

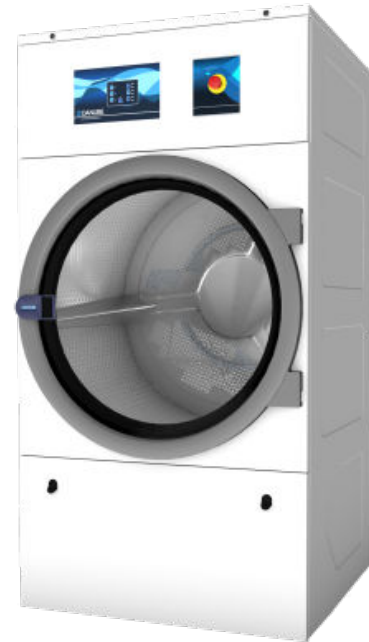


OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- AU AGA certification for gas dryers (Australia)
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DD-35 BASIC EM	
Capacity 1/18		Kg	36,7	
		lb	80,8	
Capacity 1/20		Kg	33	
		lb	72,8	
Ø Drum		mm	947	
		inch	37,3	
Drum length		mm	936	
		inch	36,9	
Drum volume		l	660	
		cu ft	23,30	
Ø Door hole		mm	802	
		inch	31,6	
Door center height		mm	1.040	
		inch	40,9	
Height from floor to bottom of door		mm	578	
		inch	22,74	
ELECTRIC HEATING				
Evaporation capacity		L/h	31,1	
		US gallon/h	8,22	
Hourly output		Kg/h	60	
		lb/h	132,28	
Installed heating power		kW	36	
Installed electrical power		kW	37,15	
Drum motor power		kW	0,55	
GAS HEATING				
Evaporation capacity (gas model)		L/h	32,1	
		US gallon/h	8,48	
Hourly output (gas model)		Kg/h	63,90	
		lb/h	140,87	
Installed gas heating power		kcal/h	35254	
		Btu/h	139899	
Installed gas heating power		kW	41	
Installed electrical power		kW	1,15	
Instant propane gas consumption (G31)		Kg/h	3,51	
		lb/h	7,74	
Instant natural gas consumption (G20)		m ³ /h	4,34	
		cfm	2,55	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,55	
Nominal air flow rate		m ³ /h	1.200	
		cfm	706	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	3,6	
		Btu/h	12291	
Max. front heat emission		kW	2,5	
		Btu/h	8604	
CONNECTIONS			E	G
Tension 230V - I + N + T		Nº x mm ² / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 50 / 125A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	985 / 1.065	
		inch	38,8 / 41,9	



Net / gross depth	mm	1.210 / 1.310
	inch	47,6 / 51,6
Net height / gross height	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	260 / 285
	lb	573 / 628
OTHERS		
Sound level	dB	65

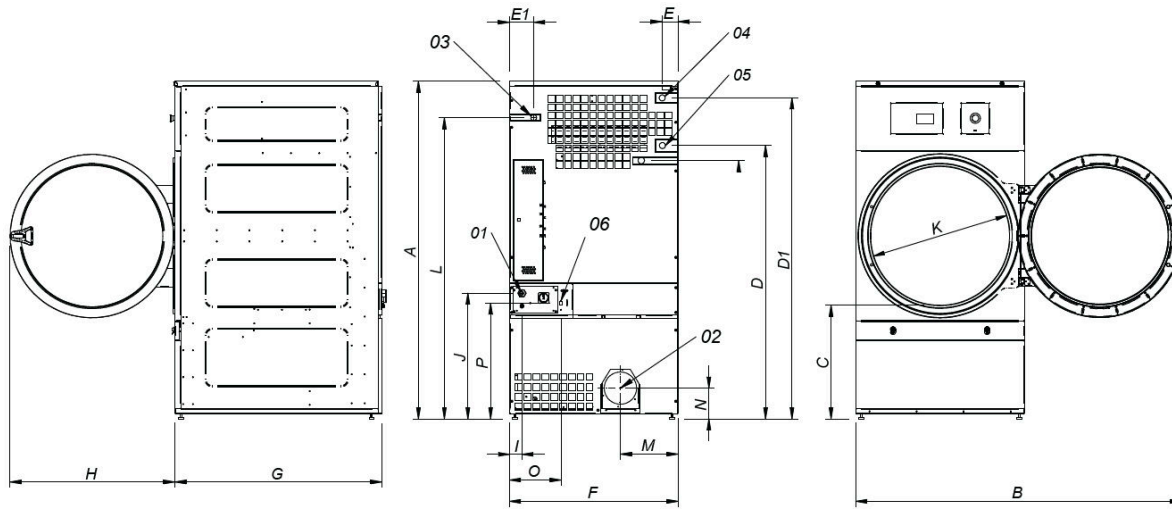

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OUTLET 1"
- 06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DD-35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676

* Measurement with legs mounted (30mm)

