

DD-22 HPI GOLD ET2

HPI Heat pump industrial dryers

EASY TOUCH 2

User-friendly, fully programmable ET2 control with 7" color touchscreen
USB connection. Free online platform for programming, telemetry, data analysis, etc. thanks to IoT
Videos display (ads, instructions, etc.)
37 languages available

FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

Double mixed axial-radial airflow
Big fluff filter
Double door glass
Low energy consumption

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior

CONNECTIVITY

IoT Danube online as standard
Management of laundries: OPL and COIN
Remote payment

ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site

MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle.
New filter drawer with wide surface.
CE approved.




OPTIONS

- RD Opposite door opening 11-22 HPI
- TR Tropicalized model (ET2)
- SSC Stainless steel outer casing (AISI-304) HPI -22
- SSF Stainless steel front panel AISI-304 HPI-22
- WB Wooden packing HPI 22
- 400V 3~ 50/60Hz HPI
- 440/480V 3~ 50/60Hz HPI
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY	UNIT.	DD-22 HPI GOLD ET2
Capacity 1/18	Kg	24,3
	Lb	53,6
Capacity 1/20	Kg	21,9
	Lb	48,3
Evaporation capacity	L/h	7,5
	USGallon/h	1,98
Hourly output	Kg/h	15
	lb/h	33,1
Efficiency	kWh/L	0,44
DRUM		
Ø Drum	mm	835
	inch	32,9
Ø Door	mm	574
	inch	22,6
Door center height	mm	1.030
	inch	40,6
Load hole bottom height	mm	743
	inch	29,25
Drum length	mm	800
	inch	26,46
Drum volume	L	438
	cu ft	15,54
POWER		
Drum motor power	kW	0,37
Fan motor power	kW	0,17
Heating power	kW	3,28
Total electric power	kW	3,82
DIMENSIONS		
Net width	mm	890
	inch	35
Net depth	mm	1.255
	inch	49,4
Net height	mm	1.812
	inch	71,3
Net weight	Kg	330
	lb	728
PACKING DIMENSIONS		
Gross width	mm	970
	inch	38,2
Gross depth	mm	1.345
	inch	53
Gross height	mm	1.940
	inch	76,4
Gross weight	Kg	350
	lb	772
OTHERS		
Nominal airflow rate	m ³ /h	VARIABLE
Ø Fume exhaust	mm	NO
Sound level	dB	61
Drain for moisture extraction (hose)	Ø / Length (mm)	12/2000
	Ø / Length (inch)	0,47 / 78,74



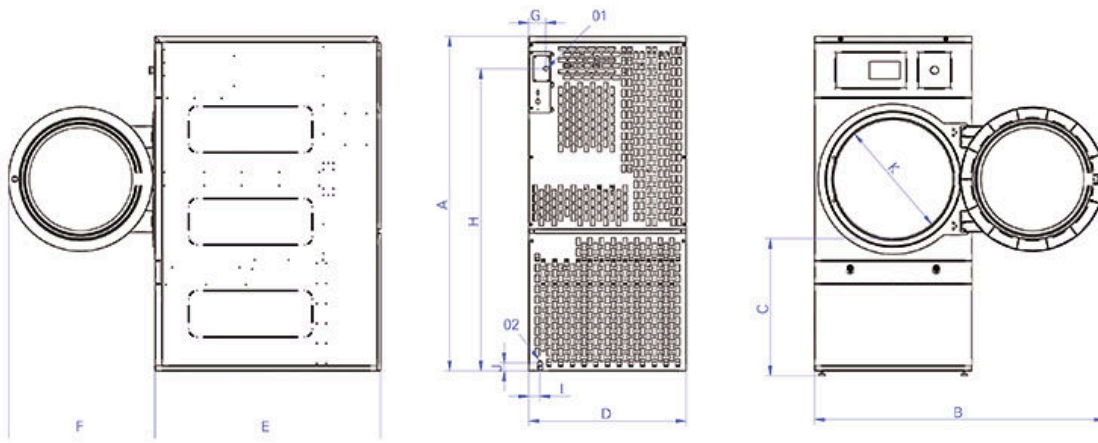

- 01. Power supply
- 02. Condensed water evacuation

Hose 2000 mm long ⁽¹⁾ and int. \varnothing 17 mm.

⁽¹⁾ For longer distances, please refer to the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
DD-11 HPi	mm	1 694	1 450	689	785	855	730	85	1 530	55	90	574
DD-14 HPi	mm	1 694	1 450	689	785	989	730	85	1 530	55	90	574
DD-18 HPi	mm	1 694	1 450	689	785	1 125	730	85	1 530	55	90	574
DD-22 HPi	mm	1 812	1 500	743	890	1 255	730	90	1 650	90	90	574

