STD-22 SILVER XP ET2
STD SILVER XP stack dryers

EASY TOUCH 2

7” touch screen user friendly and programmable ET2
USB Connection. Online platform free of charge
for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages

FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

Danube Online communication - IoT standard
Remote technical service
Management of laundries: OPL and COIN

ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters

MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components

OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except STD-22 XP model: only gas)
CE approved




OPTIONS

- IMC CARE DRY Humidity sensor STD (1 unit per stack)
- DG Double door glass STD (1 unit per stack)
- FEX Sprinkler fire extinguisher STD (1 unit per stack)
- NG Natural gas heated tumble dryer (LPG as standard)
- TR Tropicalized model (ET2) (1 unit per stack)
- RD Opposite door opening STD (1 unit per stack)
- AF Back panel with air filter (STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- 400V 3~60Hz STD-11-22
- AU AGA certification for gas dryers (Australia)
- SSC Stainless steel outer casing (AISI-304) 22 STD
- 440V/480V 3~ 60 Hz STD-11-22
- SSF Stainless steel front panel AISI-304 STD 22
- WB Wooden packing STD-22
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	STD-22 SILVER XP ET2	
Capacity 1/18	Kg	24,3 x 2	
	lb	53,5 x 2	
Capacity 1/20	Kg	21,9 x 2	
	lb	48,3 x 2	
Ø Drum	mm	835	
	inch	32,9	
Drum length	mm	800	
	inch	31,5	
Drum volume	l	440	
	cu ft	15,54	
Ø Door hole	mm	574	
	inch	22,6	
Door center height	mm	574 / 1618	
	inch	22,60 / 63,70	
Height from floor to bottom of door	mm	214 / 1258	
	inch	8,46 / 49,53	
ELECTRIC HEATING			
Evaporation capacity *	L/h *	-	
	US gallon/h *	-	
Hourly output**	Kg/h **	-	
	lb/h **	-	
Installed heating power	kW	-	
Installed electrical power	kW	-	
Drum motor power	kW	0,37 x 2	
GAS HEATING			
Evaporation capacity*	L/h	22 x 2	
	US gallon/h	5,81 x 2	
Hourly output **	Kg/h	44 x 2	
	lb/h	97 x 2	
Installed gas heating power	kcal/h	26139 x 2	
	Btu/h	103798 x 2	
	kW	30,4 x 2	
Installed electrical power	kW	1,94	
Instant LPG gas consumption (G31)	Kg/h	2,61 x 2	
	lb/h	5,75 x 2	
Instant natural gas consumption (G20)	m^3/h	3,22 x 2	
	cfm	1,89 x 2	
Ø Gas inlet	BSPP ISO 228-1	3/4"	
VENTILATION			
Fan motor power	kW	0,55 x 2	
Nominal air flow rate	m^3/h	900 x 2	
	cfm	529,72 x 2	
Ø Fume exhaust	mm	250	
	inch	9,84	
HEAT EMISSION			
Maximum total heat emission	kW	5	
	Btu/h	16934	
Max. front heat emission	kW	1,9	
	Btu/h	6350	
CONNECTIONS		E	G
Tension 230V - I + N + T	Nº x mm^2 / A	-	3 x 2,5 / 20A
Tension 230V - III + T	Nº x mm^2 / A	-	3 x 2,5 / 20A (5*)
Tension 400V - III + N + T	Nº x mm^2 / A	-	3 x 2,5 / 20 (6*)
NET DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	870 / 950	
	inch	34,3 / 37,4	

Net / gross depth	mm	1312 / 1395
	inch	51,7 / 54,9
Net / gross height	mm	2118 / 2250
	inch	83,4 / 88,6
Net / gross weight	Kg	374 / 389
	lb	823 / 856
OTHERS		
Max. sound level (1 m in front)	dB	69

* Drying conditions: full load (1/20) of towels, drying temperature 90ºC.
** Kg dry linen per hour, according to the above drying conditions.
(5*) Connect 2 phases and earth
(6*) Connect phase, neutral and earth

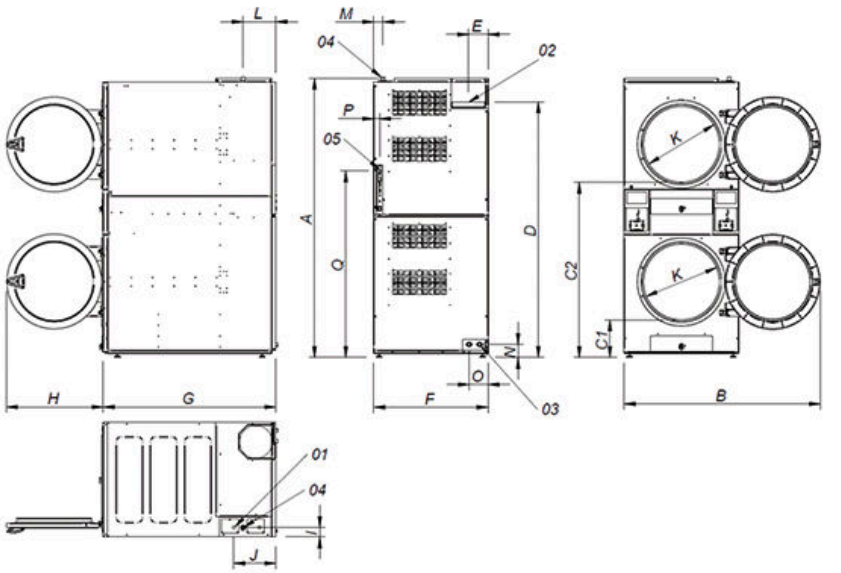

01.Power supply
02. Fumes extraction ø 250 mm
03. 2 sprinkler valves 3/4"
04. Gas inlet 1/2"
05. Ethernet connection (ET2 model only)

		A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
STD-22 XP	mm	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	100	145	45	1416