

# WPR-10 ET2

## Professional washers



### VERSATILITY

STANDARD <> SELF-SERVICE  
ELECTRIC <> HOT WATER  
VALVE <> DRAIN PUMP  
SINGLE <> STACKED  
Suitable for many sectors: gyms, restaurants, campings, laundromats...



### FEATURES

FEATURES  
High G Factor 450.  
ET2 control with a 4,3" touch screen easy to use and fully programmable  
8 dosing signals as standard  
USB connection. Free software online for programming, telemetry, data analysis...  
WET CLEANING as standard  
Short washing cycles (heating power 6 kw)



### CONNECTIVITY

**Danube Online communication - IoT as standard**  
Remote maintenance  
Management of laundry  
Multi-payment system



### EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
High G factor: reduced residual moisture, reduced drying time, energy savings  
Water Saving system: 3 configurable levels of savings



### ROBUSTNESS

Skinplate outer casing, aluminium door  
AISI-304 stainless steel drum, vat and ribs  
No inner drum seal: easy to clean  
Industrial house bearing and bearings: until 20 000 working hours  
Industrial gear and inverter  
Industrial door locking system



### OTHERS

Free standing: no anchoring to the floor  
2 water inlets  
4 compartments detergents box  
Leveling feet included  
Models with drain valve or with drain pump  
Imbalance controlled by frequency inverter  
CE and WRAS certificates




### OPTIONS

- IoT licence - Danube Online
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- DD double drain kit WPR 8-10
- P Drain to pump transformation kit WPR-8/10
- Transformation kit pump to valve WPR-8/10
- SG door silicon gasket WPR 8-10
- RD reverse door opening
- TR Tropicalized model (ET2)
- DS Upper detergent box for WPR 8-10
- XD 6 extra dosing signals card WPR 8-10
- NC Normally closed valve
- Ergonomic plinth WPR-DPR - skinplate
- Ergonomic plinth WPR-DPR - stainless steel
- Mops plinth WPR 8-10 - skinplate
- Mops plinth WPR 8-10 - stainless steel
- Water recovery plinth WPR 8-10 - skinplate
- Water recovery plinth WPR 8-10 - stainless steel
- SSC AISI-304 Stainless steel outer casing WPR 8-10
- OC Complete container order WPR + compact packing
- UD Kit temporized door opening WPR 8-10
- Supl 380-440V III 50/60 Marine WPR 8-10
- Supl 110-120/1/50-60 Hz WPR 8-10
- Several payment systems for self-service

DRUM	UNIT.	WPR-10 ET2	
Capacity 1/9	Kg	11	
Capacity 1/10	Kg	10	
Volume	l	100	
Diameter	mm	532	
Depth	mm	425	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	50 / 1250	
G Factor	-	450	
Maximum force transmitted	KN	1,57±0,53	
Frequency-dynamic force	Hz	18,33	
Noise level	dB	<70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting door	-	NO	
SLUICE option	-	NO	
DOOR			
Height center door / Height door	mm	537 / 280	
Diameter	mm	373	
POWER			
Motor	kW	0,75	
Electric heating power	kW	6	
Total electric power (electric model)	kW	6,25	
Total electric power (hw, steam model)	kW	0,75	
CONNECTIONS		E	HW
Tension 110V - I + N + T	Nº x mm² / A	-	2x1,5+T - 16A
Tension 230V - I + N + T	Nº x mm² / A	2x6+T - 40A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm² / A	3x2,5+T - 20A	-
Tension 400V - III + N + T	Nº x mm² / A	4x1,5+T - 16A	-
Steam inlet (Steam model)	inch	N/A	
Maximum steam consumption (Steam model)	Kg/h	-	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm²	2-4	
Drain	mm/inch	2"	
Drainage capacity	Lit/min	140	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	680 / 710	
Net Depth/Gross depth	mm	742 / 832	
Net Height / Gross height	mm	1040 / 1158	
Net weight / Gross weight	Kg	155 / 166	
Volume	m³	0,52 / 0,68	



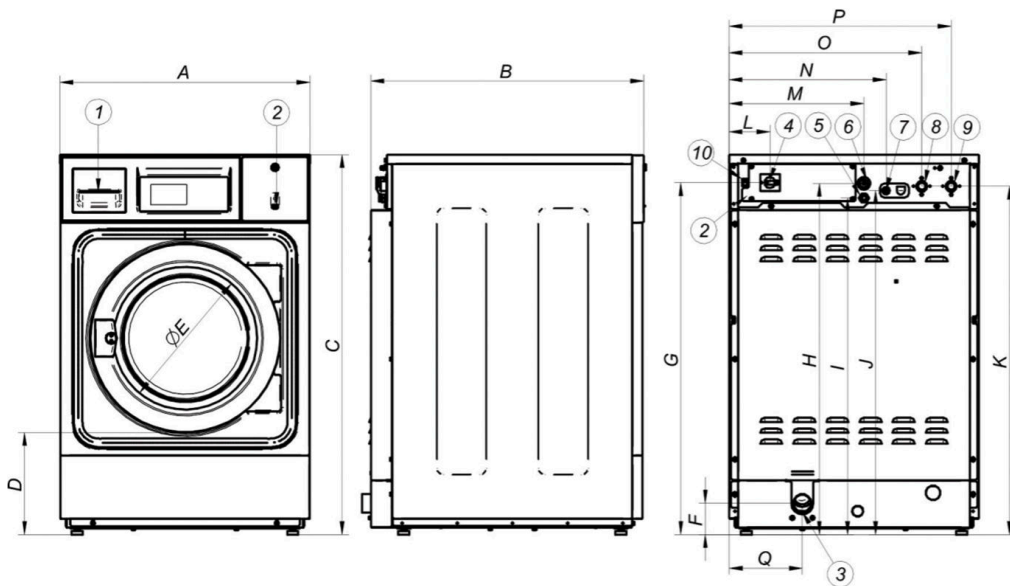

1. Soap dispenser
2. USB port
3. Drain valve/pump
4. Main switch
5. Liquid soap connection
6. Electrical connection
7. Liquid soap inlet
8. Cold water inlet
9. Hot water inlet
10. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
WPR-8 V/P	680	698	1 040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-10 V/P	680	742	1 040	278	373	86	964	962	922	942	954	110	366	427	524	603	199

