

STD-14 SILVER ET2 SILVER STD Stack dryers

EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. Online platform free of charge for programming, telemetry, data analysis
Videos on display (ads, instructions, etc.)
37 languages

FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter
New PLUS gas heated model: more powerful to achieve more productivity

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

Danube Online communication - IoT standard
Remote technical service
Managemnt of laundries: OPL and COIN

ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Big door diameters

MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components

OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except PLUS models and STD-22 model: only gas)
CE approved




OPTIONS

- IoT licence - Danube Online
- Several payment systems for self-service
- IMC CARE DRY Humidity sensor STD (1 unit per stack)
- DG Double door glass STD (1 unit per stack)
- FEX Sprinkler fire extinguisher STD (1 unit per stack)
- NG Natural gas heated tumble dryer (LPG as standard)
- TR Tropicalized model (ET2) (1 unit per stack)
- RD Opposite door opening STD (1 unit per stack)
- DS Perfumes dosing / spraying STD (1 unit per stack)
- AF Back panel with air filter (STD)
- 400V 3~ 50 Hz STD-11-18
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- 400V 3N 60 Hz STD-11-35
- 230V 3~ 60 Hz STD-11-18 G
- 230V 3~ 60 Hz STD-11-18 E
- SSC Stainless steel outer casing 14 STD
- 440V/480V 3~ 60 Hz STD-11-22
- SSF Stainless steel front panel STD 11-18
- WB Wooden packing STD-14

CAPACITY AND DRUM	UNIT.	STD-14 SILVER ET2
Capacity 1/18	Kg	15
	lb	33,1
Capacity 1/20	Kg	13,5
	lb	29,8
Ø Drum	mm	750
	inch	29,53
Drum length	mm	746
	inch	24,02
Drum volume	l	270
	cu ft	9,53
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	547 / 1.522
	inch	21,54 / 59,92
Height from floor to bottom of door	mm	189 / 1.164
	inch	7,32 / 45,83
ELECTRIC HEATING		
Evaporation capacity	L/h	17,2
	US gallon/h	4,54
Hourly output	Kg/h	34,4
	lb/h	75,8
Installed heating power	kW	12 x2
Installed electrical power	kW	25,34
Drum motor power	kW	0,37 x2
GAS HEATING		
Evaporation capacity	L/h	16,9
	US gallon/h	4,465
Hourly output	Kg/h	33,8
	lb/h	74,5
Installed gas heating power	kcal/h	10327 x2
	Btu/h	40945,7 x2
Installed gas heating power	kW	12 x2
Installed electrical power	kW	1,34
Instant propane gas consumption (G31)	Kg/h	1,03 x2
	lb/h	2,27 x2
Instant natural gas consumption (G20)	m ³ /h	1,27 x2
	cfm	0,75 x2
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	-
	Btu/h	-
Installed electrical power	kW	-
Steam consumption (8 barG) - Standard	kg/h	-
Steam consumption (116 psiG)	lb/h	-
Steam pressure	barG	-
	psiG	-
Standard steam inlet - outlet	BSPT- ISO7.1	-
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	-
Steam consumption (5 barG) - Low Pressure	kg/h	-
Steam consumption (72,5 psiG) - Low Pressure	lb/h	-
Steam pressure (low pressure)	barG	-
	psiG	-
Low pressure steam inlet - outlet	BSPT- ISO7.1	-
VENTILATION		
Fan motor power	kW	0,25 x2
Nominal air flow rate	m ³ /h	500 x2
	cfm	294,28 x2



Ø Fume exhaust	mm	200 x2	
	inch	7,78 x2	
HEAT EMISSION			
Maximum total heat emission	kW	2,4	
	Btu/h	8193,9	
Max. front heat emission	kW	1,68	
	Btu/h	5735,8	
CONNECTIONS			
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 80A	3 x 1,5 / 16A (1*)
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 40A	3 x 1,5 / 16A (2*)
NET DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	785 / 865	
	inch	30,91 / 34,06	
Net / gross depth	mm	1.106 / 1.189	
	inch	43,54 / 46,81	
Net height / gross height	mm	1.980 / 2.126	
	inch	77,95 / 83,70	
Net / gross weight	Kg	275 / 293	
	lb	606,27 / 645,95	
OTHERS			
Sound level	dB	64	

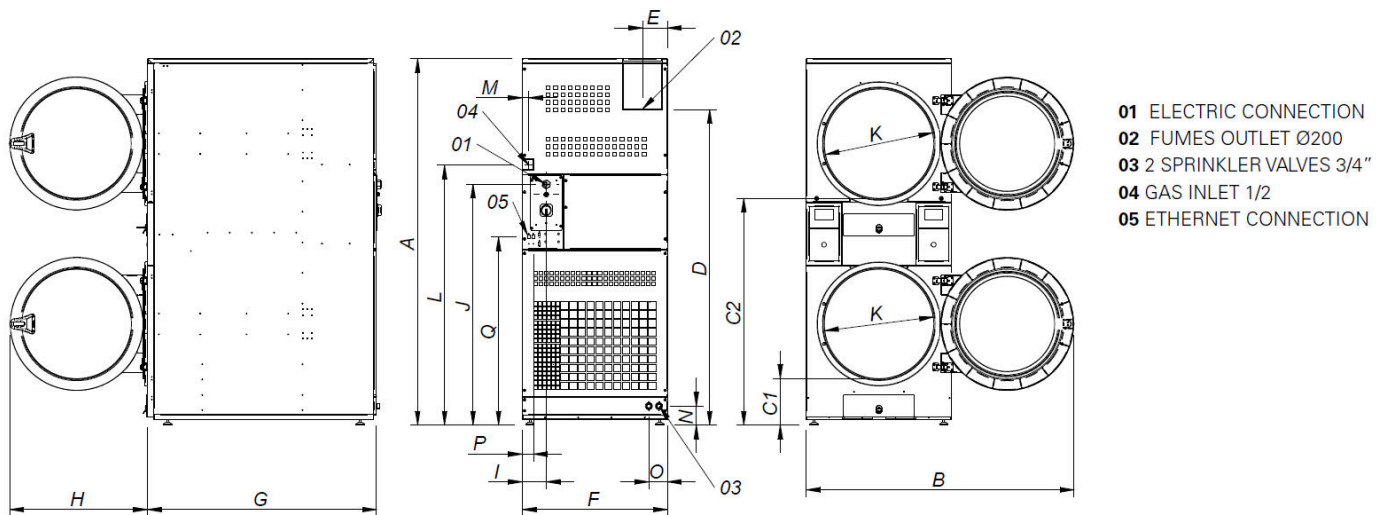

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
STD-11	1980*	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100	60	1018
STD-14	1980*	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	103	100	60	1018
STD-18	1980*	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100	60	1018

* Measurement with legs mounted (30mm)

