

# WEN-11 ET2

## Low spin washers

### EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming, telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard

### G FACTOR

G factor 200/150 (WED-60C/80C)

### EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings

### VERSATILITY

OPL <> SELF-SERVICE  
ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard

### CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry  
Multi-payment system

### ERGONOMICS

Big aluminium door  
Easy door lock system

### MAINTENANCE

Hinged panel: easy access to parts  
Same parts for all the models: electronic components, gear, inverter, contactors  
Technical menu: statistics, errors...

### OTHERS

Hard mounted washers to be anchored to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA certificate for REG4 standards.



## OPTIONS

- IoT licence - Danube Online
- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC conn. 3/4" for washers WEN/WED-11/14/18/22/28
- SL SLUICE 8 mm drum perforations option WEN-11
- Anchoring base WEN-11
- Kit External double drain 3" WEN 11-14
- NC Normally closed valve WEN-11
- RC AQUA FLOW water recirculation kit WEN-11 (not available with AQUABAC)
- XD 6 extra dosing signals card WEN 11-45C
- SG Silicon gasket WEN 11-14
- RD reverse door opening
- TR Tropicalized model (ET2)
- Steam kit WEN-11-14-18-22 (to transform E or HW models to steam)
- SSC Stainless steel outer casing WEN-11
- SSF Stainless steel front panel WEN-11
- Transformer kit 110/230V 1,2 KV WEN-11-14-18
- 440V 3~ (No N) 50/60 Hz 11
- Transformer kit 110/230V 1,2 KV 11-14-18
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN


DRUM	UNIT.	WEN-11 ET2	
Capacity 1/9	Kg	11	
Capacity 1/10	Kg	10	
Volume	l	100	
Diameter	mm	620	
Depth	mm	330	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	53 / 759	
G Factor	-	200	
Maximum force transmitted	KN	2,0 ±3	
Frequency-dynamic force	Hz	8,93	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	KIT	
Weighing system / Tilting door	-	NO	
SLUICE option	-	YES	
DOOR			
Height center door / Height door	mm	570 / 310	
Diameter	mm	373	
POWER			
Motor	kW	1,1	
Electric heating power	kW	6	
Total electric power (electric model)	kW	6,25	
Total electric power (hw, steam model)	barG	1,1	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm² / A	-	-
Tension 230V - I + N + T	Nº x mm² / A	2x6+T - 40A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm² / A	3x2,5+T - 20A	-
Tension 400V - III + N + T	Nº x mm² / A	4x1,5+T - 16A	-
Steam inlet (Steam model)	inch	1/2"	
Maximum steam consumption (Steam model)	Kg/h	7	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm²	2-4	
Maximum water consumption	Lit/h	61,5*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	719 / 782	
Net Depth/Gross depth	mm	755 / 890	
Net Height / Gross height	mm	1.165 / 1.400	
Net weight / Gross weight	kg	198 / 231,6	
Volume	m³	0,63 / 0,97	

\* Program nº20, 75% load

\*\* Program No 2, 100% load

\*\*\* 400V/230V version



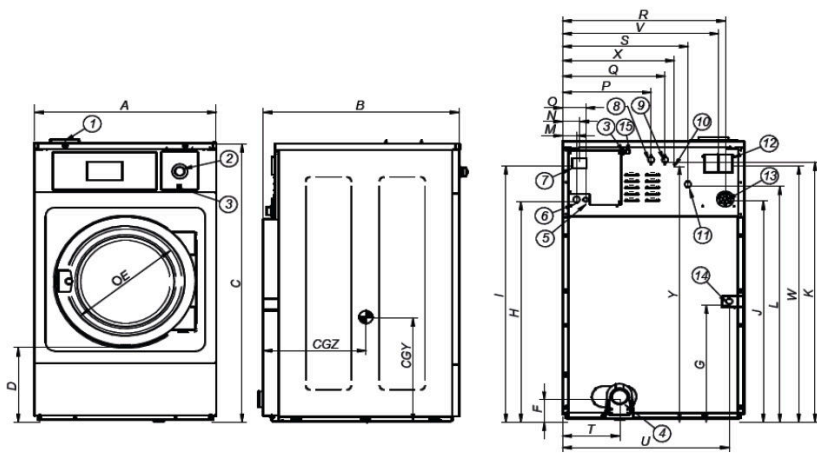

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGZ	CGY
WEN-11	719	697	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
WEN-14	719	840	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524

