

DANUBE LAUNDRY KIOSK 32

Payment systems

FEATURES

Two models available:

- 12" touch screen
- 32" touch screen

32" model available **with or without printer**

Connection to the Kiosk to the Internet via Ethernet.

Front and rear opening for maintenance.

Integrated with Danube Online IoT for unlimited connections of

Danube machines equipped with ET2 control via Ethernet-IoT.

Can be connected by means of pulse communication to other

equipment (8 machines per kiosk)*

*Installation of an electronic plate required, offered by Danube as option, in case of pulse communication.

SIMPLICITY OF USE



1. Select the process (washing, drying, or ozone disinfection)
2. Select the machine
3. Select the program
4. Pay by placing your card near the contactless device
5. Insert the clothes in the machine and press START.



OPTIONS

- External signal card for pulses


| GENERAL DATA | UNIT. | DANUBE LAUNDRY KIOSK 32 |
|---|-----------|-------------------------|
| Ethernet connection | - | YES |
| Contactless reader | - | YES |
| Pulses connection (option) | N° | 8 max. |
| Customizable (stickers) | - | YES |
| Wall installation | - | YES |
| Rear access | - | YES |
| Recommended floor height | mm | 860 |
| Printer | - | OPT. |
| CONNECTIONS | | E |
| Tension 230V I N + T | N°x mm²/A | 2x1,5+T - 16A |
| Ethernet cable | - | 1 x |
| Pulse wiring | - | 8 x |
| OVERALL DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / gross width | mm | 507 / 565 |
| Net depth / gross depth | mm | 185,6 / 220 |
| Net height / gross height | mm | 980,2 / 1.050 |
| Net weight / gross weight | mm | 22,5 / 25 |

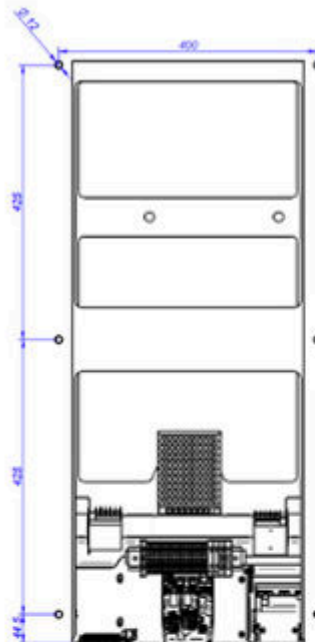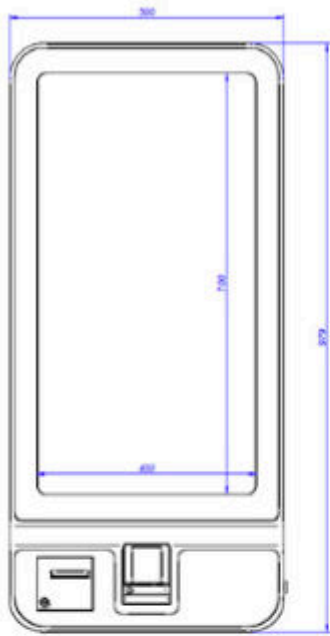

WITH REAR ACCESS

All wiring is concealed, components can be accessed from the rear.

It is recommended to drill a cavity in the wall respecting the anchor points of the Kiosk.

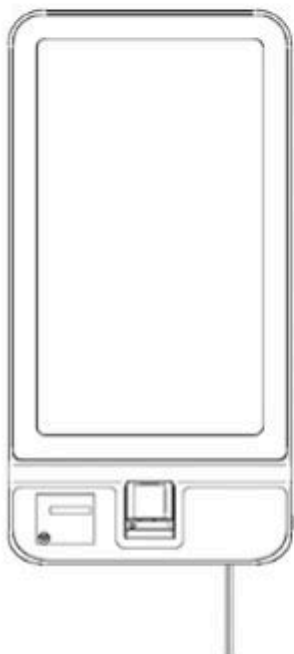

WALL MOUNTED WITHOUT REAR ACCESS OR IN COLUMN

A cable outlet is required at the front containing the Ethernet cable, power and pulse wiring.

By unlocking on the side, it is possible to move the assembly (leaving only the anchoring part to the wall) to carry out maintenance.

MODEL WITH PRINTER

To facilitate maintenance of the model with printer, a lockable front opening has been installed, designed to quickly replace the printing paper.

Not available on 12" model.

