



# S600-2600 S compact ironers

## FEATURES

S models are ironers that dry and iron only, without any folding devices

- Roll dimensions: working width 2m60 and 3m30, ø 600, 800 or 1000 mm.
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in white painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with temperature and speed control:
  - between 3 and 10 m/min (ø 600 mm)
  - between 3 and 13 m/min (ø 800 mm)
  - between 4 and 18 m/min (ø 1000 mm)
- Big output capacity: depending on the residual moisture of the linen, straight from a high spin washer extractor:
  - up to 140 kg/h (ø 600 mm)
  - up to 220 kg/h (ø 800 mm)
  - up to 290 kg/h (ø 1000 mm)
- Electric, gas or steam heating
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar






## OPTIONS

- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (requires vacuum feeding belts option)
- Rear exit
- Motorized rear exit - height 860 mm. (rear exit included)
- Small pieces back collector: 2 lanes (requires rear exit option)
- Small pieces back collector: 4 lanes (requires rear exit option)
- Different voltage from 400V III +N 50Hz
- Maritime packing for S

GENERAL DATA	UNIT.	S600-2600
Theoretical production* elec/steam	Kg/h	75-105
Theoretical production gas heating*	Kg/h	75-105
Theoretical production* radiant gas burner	Kg/h	90-126
Ø Roll	mm	600
Working width	mm	2.600
Height floor-feeding	mm	1.050
Working speed	m/min	3-12
Control type	-	Digital
No. of programs	Nº.	20
MAIN FUNCTIONS		
Drying	-	YES
Ironing	-	YES
Longitudinal folding	-	NO
Cross folding	-	NO
Lateral stacking (Roll-Off or compact stacker)	-	NO
FOLDING		
1 lane - lengthfold	Nº.	NO
1 lane - crossfold	Nº	NO
2 lanes - lengthfold	Nº	NO
2 lanes - crossfold	Nº	NO
POWER		
Electric model - Consumption	A	78
Electric model - Heating power	kW	54
Electric model - Total electrical power	kW	55,9
Steam model - Consumption	Kg/h	95
Steam model - Power (max 12 bar)	kW	55
Steam model - Total electrical power	kW	1,9
Liquefied gas (LPG) model - Consumption	m³/h	2,50
Liquefied gas (LPG) model - Power	kW	67,40
Natural gas (NG) model - Consumption	m³/h	6,70
Natural gas (NG) model - Power	kW	63,3
Gas LPG / NG model - Total electrical power	kW	1,9
CONNECTIONS		
Ø Gas inlet	BSP	1"
Ø Steam inlet (12 bar max.)	BSP	1"
Ø Condensed (steam models)	BSP	1/2"
Ø Air inlet	mm	12
DIMENSIONS		
Net width / gross width	mm	3.670 / 3.830
Net depth / gross depth	mm	1.440 / 1.620
Net height / gross height	mm	2.030 / 1.960
Net weight / gross weight	Kg	1.800 / 2.050
Volume	m³	10,73 / 12,16
OTHERS		
Exhaust outlet	Nº	2
Exhaust outlet Ø	mm	120
Air extraction flow rate	m³/h	2 x 630
Air consumption (6.5 bar)	NI/h	5.000
Noise level	dB	<80

\*50% residual moisture, 140gr / m2 cotton,100% roll use



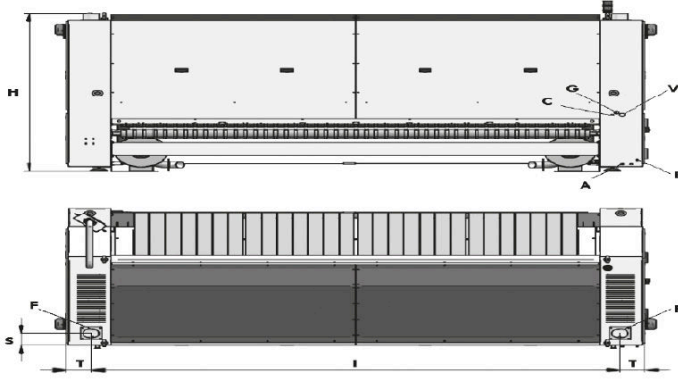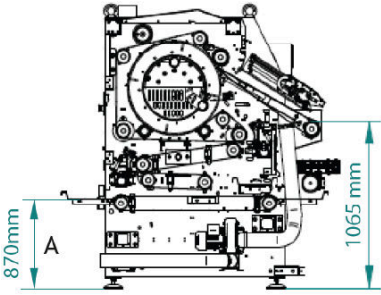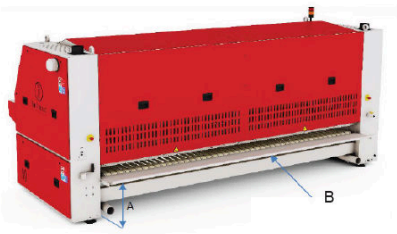

- A. Compressed air inlet
- B. Rear collector
- C. Condensed discharge (steam model)
- E. Electrical connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
S600-2600	1.800	3.242	186	152	∅ 12	1/2"	5 x 2,5	∅ 120	1"	1"
S600-3300	1.800	3.942	186	152	∅ 12	1/2"	5 x 2,5	∅ 120	1"	1"

