

WED-100C ET2

High spin washers

EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...

OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards



OPTIONS


- Dosing pumps kit DQ-2
- Additional dosing pump DB-1
- RT Ready for AQUABAC XL conn. 1" for washers WED-100C/120C
- DD Double drain kit WED-100C-120C
- Kit WATERMARK Australia
- TL2 Double tilting kit WED-100C-120C
- TL1 Frontal tilting kit WED-100C-120C
- WS weighing system WED-60C to 120C
- XD 6 extra dosing signals card WED-60C-120C
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-100C/120C (to transform HW models to steam)
- DH Dual heating kit WED-60C/80C
- SSC Stainless steel outer casing AISI-304 WED-100C
- 440V 3~ (No N) 50/60 Hz 100C / 120C
- 230V 3~ 50/60 Hz 100C / 120C
- IoT licence - Danube Online

DRUM	UNIT.	WED-100C ET2
Capacity 1/9	Kg	105
Capacity 1/10	Kg	95
Volume	l	950
Diameter	mm	1.360
Depth	mm	637
GENERAL DETAILS		
Washing speed / Spining speed	r.p.m.	34 / 678
G Factor	-	350
Maximum force transmitted	KN	37,77 ±5,25
Frequency-dynamic force	Hz	11,33
Noise level	dB	< 70
Coin laundry version	-	NO
Double drain	-	OPT.
Weighing system	-	OPT.
Tilting system	-	OPT.
DOOR		
Height door bottom	mm	945
Diameter	mm	700
POWER		
Motor	kW	15
Electric heating power	kW	-
Total electric power (electric model)	kW	-
Total electric power (hw, steam model)	barG	15
CONNECTIONS		HW/S
Tension 110V - I + N + T	Nº x mm ² / A	-
Tension 230V - I + N + T	Nº x mm ² / A	-
Tension 230V - III + T	Nº x mm ² / A	3x16+T - 63A
Tension 400V - III + N + T	Nº x mm ² / A	4x6+T - 40A
Steam inlet (Steam model)	inch	1-1/4"
Maximum steam consumption (Steam model)	Kg/h	26,5
Water inlet	inch	1-1/2"
Water main pressuer	Kgs/cm ²	2-4
Maximum water consumption*	Lit/h	1.058*
Drain	mm/inch	4"
Drainage capacity	Lit/min	500
DIMENSIONS / PACKING DIMENSIONS		
Net Width/Gross width	mm	1.836 / 1.940
Net Depth/Gross depth	mm	1.710 / 2.030
Net Height / Gross height	mm	2.245 / 2.290
Net weight / Gross weight	kg	2.300 / 2.600
Volume	m ³	9

* Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.

** 400V version / 230V version



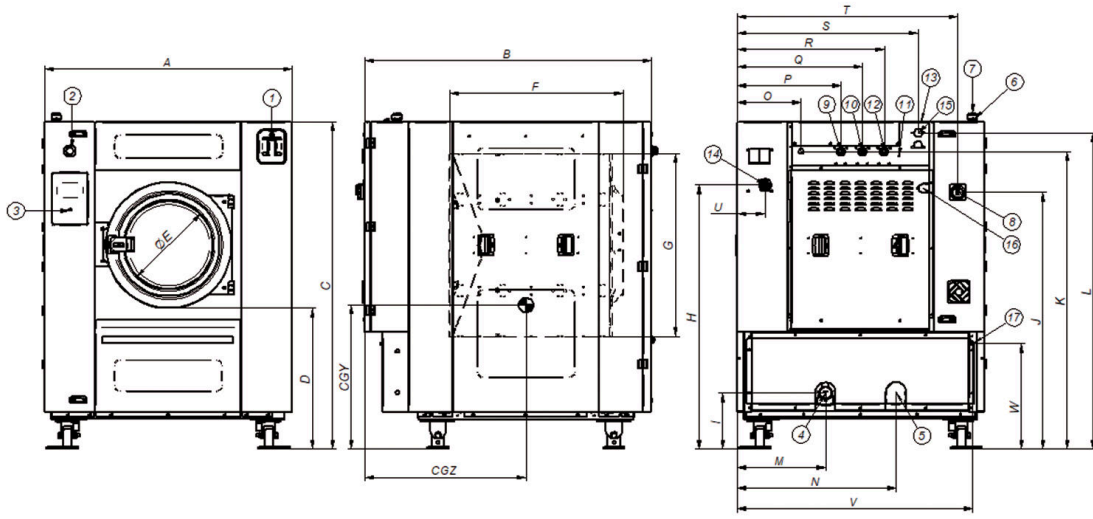

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain 1
5. Drain 2
6. Electric connection to liquid soap pumps
7. Electrical connection
8. Main switch
9. Auxiliar water inlet
10. Hot water inlet
11. Equipotential connection
12. Cold water inlet
13. Steam output
14. Liquid soap connection
15. Steam connection
16. Air intake
17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-100C	mm	1 836	1 710	2 245	945	700	792	1 350	1 740	336	1 781	2 038	2 110	675	1 092	494	634	774	954	994	1 239	1 646	165	2 049	853	1 025
WED-120C	mm	1 836	1 832	2 245	945	700	792	1 350	1 740	336	1 781	2 038	2 110	675	1 092	494	634	774	954	994	1 239	1 646	165	2 049	853	1 130

