

# WED-80C ET2

## High spin washers

### EASY TOUCH 2

7" touch screen, user-friendly and fully programmable  
Connection USB. Free software online for programming, telemetry, data analysis...  
Videos display (ads, instructions...)  
37 available languages  
8 dosing signals as standard

### G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

### EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load  
Water Saving system: 3 configurable levels of savings  
Ready for water recovery tanks AQUABAC

### VERSATILITY

ELECTRIC <> HOT WATER  
MAKE TO ORDER: possibility to customize  
WET CLEANING as standard

### CONNECTIVITY

**Communication Danube Online - IoT as standard**  
Remote technical service  
Management of laundry  
Multi-payment system

### ERGONOMICS

Big aluminium door  
Easy door lock system

### MAINTENANCE

Hinged panel: easy access to parts  
Technical menu: statistics, errors...

### OTHERS

Free standing: no anchoring to the floor  
Stainless steel vat and drum, skinplate outer casing  
3 water inlets  
Detergents box with compartments  
Imbalance controlled by frequency inverter  
CE standards and KIWA for REG4 standards




## OPTIONS

- IoT licence - Danube Online
- RT Ready for AQUABAC XL conn. 1" for washers WEN/WED-60C/80C
- DD Double drain kit WED-60C-80C
- NC Normally closed valve WED-60C/80C
- TL2 Double tilting kit WED-60C/80C
- TL1 Frontal tilting kit WED-60C/80C
- Water hose kit WED/WEN-60C/80C (one per water intake)
- WS weighing system WED-60C to 120C (additional 6 dosing signals included)
- XD 6 extra dosing signals card WED-60C-120C
- RD reverse door opening
- TR Protected board ET2 for WED-35C and 45C (standard on 60 to 120 kg models)
- Steam kit WED-60C/80C (to transform E or HW models to steam)
- DH Dual heating kit WED-60C/80C
- SSC Stainless steel outer casing WED-80C
- Supl 440V III 50/60 80 kg
- 230V III 50/60 - 80 kg

DRUM	UNIT.	WED-80C ET2	
Capacity 1/9	Kg	85	
Capacity 1/10	Kg	77	
Volume	l	770	
Diameter	mm	1.048	
Depth	mm	892	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	38 / 875	
G Factor	-	450	
Maximum force transmitted	KN	23 ±4,8	
Frequency-dynamic force	Hz	12,66	
Noise level	dB	< 70	
Coin laundry version	-	NO	
Double drain	-	OPT.	
Weighing system / Tilting door	-	OPT.	
SLUICE option	-	N/A	
DOOR			
Height center door / Height door	mm	1.170/810	
Diameter	mm	560	
POWER			
Motor	kW	15	
Electric heating power	kW	48 / 36	
Total electric power (electric model)	kW	51 / 39	
Total electric power (hw, steam model)	barG	15	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm² / A	-	-
Tension 230V - I + N + T	Nº x mm² / A	-	-
Tension 230V - III + T	Nº x mm² / A	3x25+T - 100A	3X6+T - 40A
Tension 400V - III + N + T	Nº x mm² / A	4x25+T - 80A	4x10+T - 50A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	25	
Water inlet	inch	1"	
Water main pressuer	Kgs/cm²	2-4	
Maximum water consumption*	Lit/h	781	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	1.420 / 1.600	
Net Depth/Gross depth	mm	1.645 / 1.805	
Net Height / Gross height	mm	1.890 / 1.930	
Net weight / Gross weight	kg	1.800 / 2.000	
Volume	m³	5,6	

\* Program 60°, 75% load



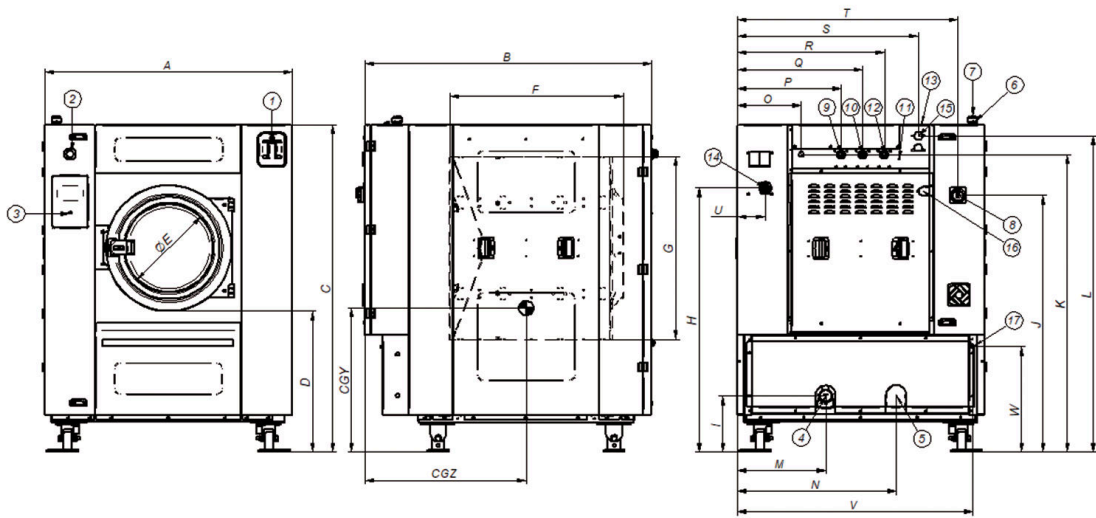

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain 1
5. Drain 2
6. Electric connection to liquid soap pumps
7. Electrical connection
8. Main switch
9. Auxiliar water inlet
10. Hot water inlet
11. Equipotential connection
12. Cold water inlet
13. Steam output
14. Liquid soap connection
15. Steam connection
16. Air intake
17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-60C	mm	1 420	1 433	1 880	810	560	760	1 050	1 563	323	1 475	1 710	1 817	508	912	367	595	720	845	1 040	1 267	160	1 353	608	830	820
WED-80C	mm	1 420	1 645	1 880	810	560	972	1 050	1 563	323	1 475	1 710	1 817	508	912	367	595	720	845	1 040	1 267	160	1 353	608	830	925

