

DD-18 HPI GOLD ET2

HPI Heat pump industrial dryers



EASY TOUCH 2

User-friendly, fully programmable ET2 control with 7" color touchscreen
USB connection. Free online platform for programming, telemetry, data analysis, etc. thanks to IoT
Videos display (ads, instructions, etc.)
37 languages available



FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.



EFFICIENCY

Double mixed axial-radial airflow
Big fluff filter
Double door glass
Low energy consumption



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior



CONNECTIVITY

IoT Danube online as standard
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle.
New filter drawer with wide surface.
CE approved.




OPTIONS

- RD Opposite door opening 11-22 HPI
- TR Tropicalized model (ET2)
- SSC Stainless steel outer casing (AISI-304) HPI -14-18
- SSF Stainless steel front panel AISI-304 HPI-11-18
- WB Embalaje de madera HPI 11
- WB Wooden packing HPI 14-18
- 400V 3~ 50/60Hz HPI
- 440/480V 3~ 50/60Hz HPI
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY		UNIT.	DD-18 HPI GOLD ET2
Capacity 1/18		Kg	18,3
		Lb	40,4
Capacity 1/20		Kg	16,5
		Lb	36,3
Evaporation capacity		L/h	7,1
		USGallon/h	1,88
Hourly output		Kg/h	14,1
		lb/h	31,1
Efficiency		kWh/L	0,43
DRUM			
Ø Drum		mm	750
		inch	29,5
Ø Door		mm	574
		inch	22,6
Door center height		mm	976
		inch	38,4
Load hole bottom height		mm	689
		inch	27,13
Drum length		mm	746
		inch	24,33
Drum volume		L	330
		cu ft	11,64
POWER			
Drum motor power		kW	0,37
Fan motor power		kW	0,17
Heating power		kW	3,28
Total electric power		kW	3,82
DIMENSIONS			
Net width		mm	785
		inch	30,9
Net depth		mm	1.125
		inch	44,3
Net height		mm	1.694
		inch	66,7
Net weight		Kg	307
		lb	677
PACKING DIMENSIONS			
Gross width		mm	865
		inch	34,1
Gross depth		mm	1.210
		inch	47,6
Gross height		mm	1.840
		inch	72,4
Gross weight		Kg	320
		lb	705
OTHERS			
Nominal airflow rate		m ³ /h	VARIABLE
Ø Fume exhaust		mm	NO
Sound level		dB	61
Drain for moisture extraction (hose)		Ø / Length (mm)	12/2000
		Ø / Length (inch)	0,47 / 78,74



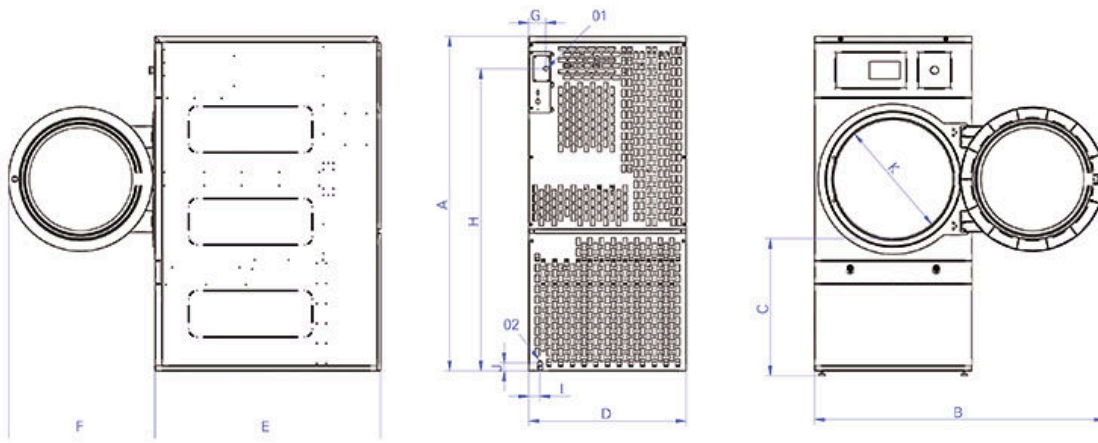

- 01. Power supply
- 02. Condensed water evacuation

Hose 2000 mm long ⁽¹⁾ and int. \varnothing 17 mm.

⁽¹⁾ For longer distances, please refer to the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
DD-11 HPi	mm	1 694	1 450	689	785	855	730	85	1 530	55	90	574
DD-14 HPi	mm	1 694	1 450	689	785	989	730	85	1 530	55	90	574
DD-18 HPi	mm	1 694	1 450	689	785	1 125	730	85	1 530	55	90	574
DD-22 HPi	mm	1 812	1 500	743	890	1 255	730	90	1 650	90	90	574

