DD-18 HPi GOLD ET2

HPi Heat pump industrial dryers

EASY TOUCH 2

User-friendly, fully programmable ET2 control with 7" color touchscreen
USB connection. Free online platform for programming, telemetry, data analysis, etc. thanks to IoT
Videos display (ads, instructions, etc.)
37 languages available



FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

Double mixed axial-radial airflow
Big fluff filter
Double door glass
Low energy consumption

VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior

CONNECTIVITY

IoT Danube online as standard
Management of laundries: OPL and COIN
Remote payment

ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site

MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle.
New filter drawer with wide surface.
CE approved.

OPTIONS

- RD Opposite door opening 11-22 HPi
- TR Tropicalized model (ET2)
- SSC Stainless steel outer casing (AISI-304) HPi -14-18
- SSF Stainless steel front panel AISI-304 HPi-11-18
- WB Embalaje de madera HPi 11
- WB Wooden packing HPi 14-18
- 400V 3~ 50/60Hz HPi
- 440/480V 3~ 50/60Hz HPi
- IoT licence - Danube Online
- Several payment systems for self-service

CAPACITY	UNIT.	DD-18 HPi GOLD ET2
Capacity 1/18	Kg	18,3
	Lb	40,4
Capacity 1/20	Kg	16,5
	Lb	36,3
Evaporation capacity	L/h	7,1
	USGallon/h	1,88
Hourly output	Kg/h	14,1
	lb/h	31,1
Efficiency	kWh/L	0,43
DRUM		
Ø Drum	mm	750
	inch	29,5
Ø Door	mm	574
	inch	22,6
Door center height	mm	976
	inch	38,4
Load hole bottom height	mm	689
	inch	27,13
Drum length	mm	746
	inch	24,33
Drum volume	L	330
	cu ft	11,64
POWER		
Voltage 230V 1N+G 50/60Hz	Nº x mm²	3 x 4 / 25A
Drum motor power	kW	0,37
Fan motor power	kW	0,17
Heating power	kW	3,28
Total electric power	kW	3,82
DIMENSIONS		
Net width	mm	785
	inch	30,9
Net depth	mm	1.125
	inch	44,3
Net height	mm	1.694
	inch	66,7
Net weight	Kg	307
	lb	677
PACKING DIMENSIONS		
Gross width	mm	865
	inch	34,1
Gross depth	mm	1.210
	inch	47,6
Gross height	mm	1.840
	inch	72,4
Gross weight	Kg	320
	lb	705
OTHERS		
Nominal airflow rate	m³/h	VARIABLE
Ø Fume exhaust	mm	NO
Sound level	dB	61
Moisture drainage pipe (ø/length)	mm	12 / 2000
	inch	0,47 / 78,74

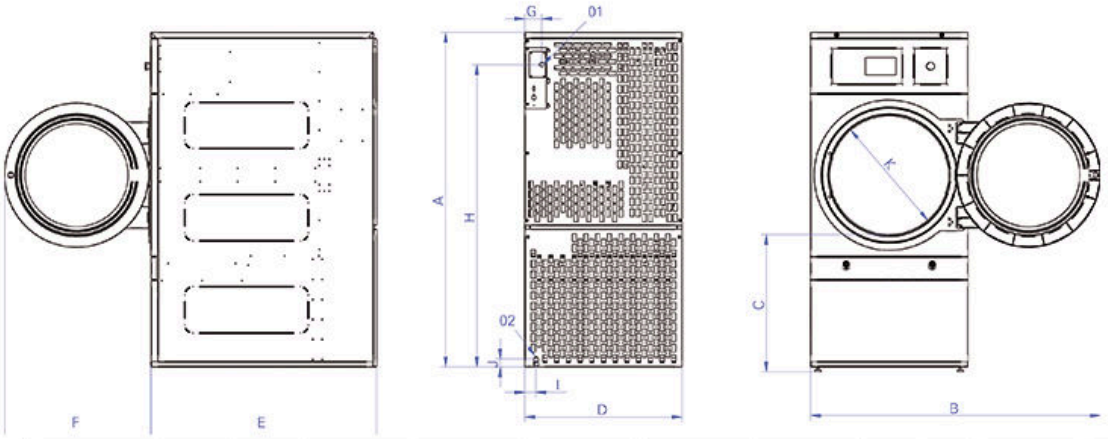

01. Power supply
02. Condensed water evacuation

Hose 2000 mm long (1) and ø int 12 mm . For longer distances, please refer to the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
DD-11 HPi	mm	1 694	1 450	689	785	1 040	730	85	1 530	55	90	574
DD-14 HPi	mm	1 694	1 450	689	785	1 040	730	85	1 530	55	90	574
DD-18 HPi	mm	1 694	1 450	689	785	1 125	730	85	1 530	55	90	574
DD-22 HPi	mm	1 812	1 500	743	890	1 255	730	90	1 650	90	90	574