WED-14 ET2
High spin washers

EASY TOUCH 2

7” touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configuable levels of savings
Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...

OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards




OPTIONS

• Dosing pumps kit DQ-2
• RT Ready for AQUABAC XL conn. 3/4" for washers WEN/WED-11/14/18/22/28
• Additional dosing pump DB-1
• DD Double drain kit WED-14-18-22
• P Drain-pump kit WED-11-14
• Kit WATERMARK Australia
• NC Normally closed valve WED-14
• RC AQUA FLOW water recirculation kit WED-14 (not available with AQUABAC)
• LG Level feet kit WED-11 to 28
• WS weighing system WED-11 to 45C (XD card to be ordered separately)
• XD 6 extra dosing signals card WED-11-45C
• SG Silicon gasket WED-WEN 11-14
• RD reverse door opening
• TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
• Steam kit WED-11 to 22 (to transform E or HW models to steam)
• Mops plinth stainless steel WED-14
• Mops plinth skinplate WED-14
• Self plinth same height of machine stainless steel WED-14
• Self plinth same height of machine skinplate WED-14
• Ergonomic plinth stainless steel WED-14
• Ergonomic plinth skinplate WED-14
• SSC Stainless steel outer casing AISI-304 WED-14
• SSF Stainless steel front panel AISI-304 WED-14
• 440V 3~ (No N) 50/60 Hz 14
• IoT licence - Danube Online
• Several payment systems for self-service
• UD Kit temporized door opening WED-WEN

TECHNICAL DATA	UNIT.	WED-14 ET2	
DRUM			
Load capacity 1:9 / 1:10	Kg	14/13	
Volume	l	130	
	gal	34,3	
Diameter	mm	620	
	inch	24,1	
Depth	mm	430	
	inch	16,9	
GENERAL DATA			
Washing speed / Spin speed	r.p.m.	50 / 1.204	
G factor	-	500	
Maximum transmitted force	KN	2,49 ±1,05	
Dynamic force frequency	Hz	16,7	
Sound level	dB	< 70	
Self-service version	-	YES	
Double drain	-	OPT.	
Weighing system / Tilting system	-	OPT./NO	
SLUICE option	-	NO	
DOOR			
Door centre height / Door base height	mm	700 / 440	
	inch	27,5 / 17,3	
Diameter	mm	373	
	inch	14,60	
POWER			
Motor	kW	1,1	
Electric heating (electric model)	kW	9	
Maximum electric power	kW	9,4	
Max. power steam & hot water model	kW	1,1	
CONNECTIONS		E	HW/S
Voltage 110V - 1 + N + E	Nº x mm2 / A	-	-
	Nº x AWG / A	-	-
Voltage 230V - 1 + N + E	Nº x mm2 / A	3x10 / 50A	3x1,5 / 16A
	Nº x AWG / A	3x7 / 50A	3x15 / 15A
Voltage 230V - 3 + E	Nº x mm2 / A	4x4 / 32A	-
	Nº x AWG / A	4x11 / 30A	-
Voltage 400V - 3 + N + E	Nº x mm2 / A	5x1,5 / 16A	-
	Nº x AWG / A	5x15 / 20A	-
Steam inlet (steam model)	inch	1/2"	
Max. steam consumption (steam model)	Kg/h	8,5	
Water inlet	inch	3/4"	
Water pressure	Kgs/cm2	2-4	
Max. water consumption*	Lit/h	88,8*	
	GPH	23,4*	
Drain	inch	3"	
Drain capacity	Lit/min	200	
	GPM	52,8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	788 / 850	
	inch	31 / 33,4	
Net depth / Gross depth	mm	869 / 1.015	
	inch	34,2 / 39,9	
Net height / Gross height	mm	1.307 / 1.600	
	inch	51,4 /62,99	
Net weight / Gross weight	kg	236 / 274,5	
	lb	520,29 / 605,1	

Packing volume	m3	1,38
	ft3	48,7

*Programme no.20, 75% load
**Programme no.2, 100% load

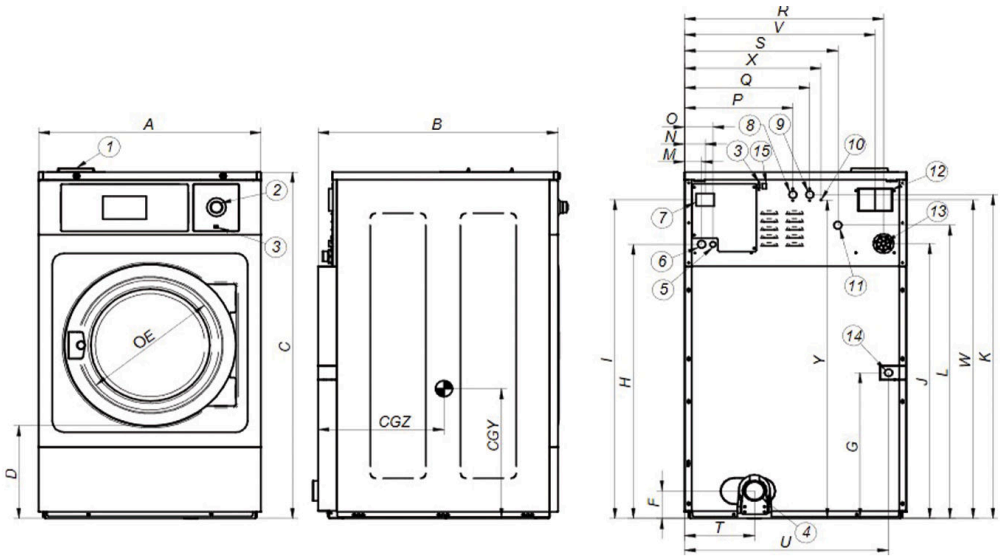

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Steam output
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-11	mm	692	830	1 185	370	373	125	354	913	1 085	916	1 100	985	61	74	101	292	352	610	448	226	626	580	1 080	442	1 145	424	577
WED-14	mm	788	869	1 307	440	373	125	385	1 034	1 202	1 037	1 221	1 106	61	74	101	385	445	706	544	243	718	676	1 202	485	1 201	450	651