

# DD-28 BASIC EM BASIC dryers



## ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



## FEATURES

Reversing drum action as standard  
Galvanized drum as standard  
Frequency inverter as standard



## EFFICIENCY

Big fluff filter



## VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## ERGONOMICS

Big door diameters  
Opening sense of door adjustable on site




## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics, data recovery for after-sales service, software updates, etc.  
Easy access to components



## OTHERS

White painted panels  
**COOL DOWN** - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved

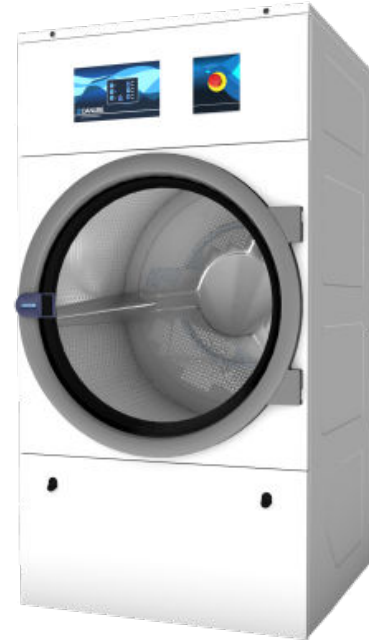


## OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- AU AGA certification for gas dryers (Australia)
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DD-28 BASIC EM	
Capacity 1/18		Kg	30,6	
		lb	67,3	
Capacity 1/20		Kg	27,5	
		lb	60,6	
Ø Drum		mm	947	
		inch	37,3	
Drum length		mm	780	
		inch	30,7	
Drum volume		l	550	
		cu ft	19,42	
Ø Door hole		mm	802	
		inch	31,6	
Door center height		mm	1.040	
		inch	40,9	
Height from floor to bottom of door		mm	578	
		inch	22,74	
ELECTRIC HEATING				
Evaporation capacity		L/h	26,1	
		US gallon/h	6,89	
Hourly output		Kg/h	48,4	
		lb/h	106,7	
Installed heating power		kW	30	
Installed electrical power		kW	31,15	
Drum motor power		kW	0,55	
GAS HEATING				
Evaporation capacity (gas model)		L/h	30,9	
		US gallon/h	8,16	
Hourly output (gas model)		Kg/h	59,30	
		lb/h	130,73	
Installed gas heating power		kcal/h	35254	
		Btu/h	139899	
Installed gas heating power		kW	41	
Installed electrical power		kW	1,15	
Instant propane gas consumption (G31)		Kg/h	3,51	
		lb/h	7,74	
Instant natural gas consumption (G20)		m <sup>3</sup> /h	4,34	
		cfm	2,55	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,55	
Nominal air flow rate		m <sup>3</sup> /h	1.200	
		cfm	706	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	3	
		Btu/h	10242	
Max. front heat emission		kW	2,1	
		Btu/h	7170	
CONNECTIONS				
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	E	G
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	-	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	4 x 35 / 100A	3 x 1,5 / 16A
			5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	985 / 1.065	
		inch	38,8 / 41,9	



Net / gross depth	mm	1.054 / 1.154
	inch	41,5 / 45,4
Net height / gross height	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	230 / 260
	lb	507 / 573
<b>OTHERS</b>		
Sound level	dB	65

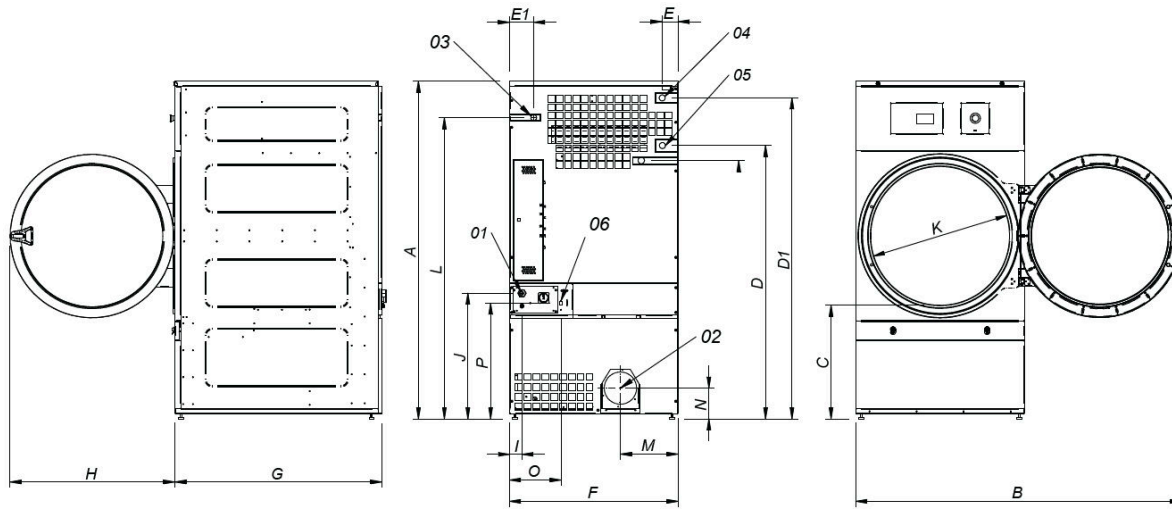

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OUTLET 1"
- 06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DD-35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676

\* Measurement with legs mounted (30mm)

