DD-11 BASIC EM
BASIC dryers

ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time

FEATURES

Reversing drum action as standard
Galvanized drum as standard
Frequency inverter as standard

EFFICIENCY

Big fluff filter

VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

Big door diameters
Opening sense of door adjustable on site

MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics, data recovery for after-sales service, software updates, etc.
Easy access to components

OTHERS

White painted panels
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved




OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- RP Reduced power (12kw instead of 18kw) for electric heated 14kg and 18kg models.
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,35 G/S
- AU AGA certification for gas dryers (Australia)
- 230V 1N 50 Hz DD-11 E
- 440/480V 3~ 60 Hz DD-11,18
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DD-11 BASIC EM	
Capacity 1/18	Kg	11,7	
	lb	25,7	
Capacity 1/20	Kg	10,5	
	lb	23,1	
Ø Drum	mm	750	
	inch	29,5	
Drum length	mm	475	
	inch	18,7	
Drum volume	l	210	
	cu ft	7,41	
Ø Door hole	mm	574	
	inch	22,6	
Door center height	mm	976	
	inch	38,4	
Height from floor to bottom of door	mm	618	
	inch	24,33	
ELECTRIC HEATING			
Evaporation capacity	L/h	9,3	
	US gallon/h	2,46	
Hourly output	Kg/h	20,3	
	lb/h	44,75	
Installed heating power	kW	12	
Installed electrical power	kW	12,67	
Drum motor power	kW	0,37	
GAS HEATING			
Evaporation capacity (gas model)	L/h	14,5	
	US gallon/h	3,83	
Hourly output (gas model)	Kg/h	28,60	
	lb/h	63,05	
Installed gas heating power	kcal/h	17727	
	Btu/h	69996	
Installed gas heating power	kW	20,5	
Installed electrical power	kW	0,67	
Instant propane gas consumption (G31)	Kg/h	1,76	
	lb/h	3,88	
Instant natural gas consumption (G20)	m^3/h	2,17	
	cfm	1,28	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
VENTILATION			
Fan motor power	kW	0,25	
Nominal air flow rate	m^3/h	850	
	cfm	500	
Ø Fume exhaust	mm	200	
	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	1,2	
	Btu/h	4097	
Max. front heat emission	kW	0,8	
	Btu/h	2868	
CONNECTIONS		E	G
Tension 230V - I + N + T	Nº x mm^2 / A	3 x 25 / 63A	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm^2 / A	4 x 10 / 40A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm^2 / A	5 x 4 / 25A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	785 / 865	
	inch	30,9 / 34,1	

Net / gross depth	mm	855 / 940
	inch	33,7 / 37
Net height / gross height	mm	1.694 / 1.840
	inch	66,7 / 72,4
Net / gross weight	Kg	172 / 180
	lb	379 / 397
OTHERS		
Sound level	dB	64

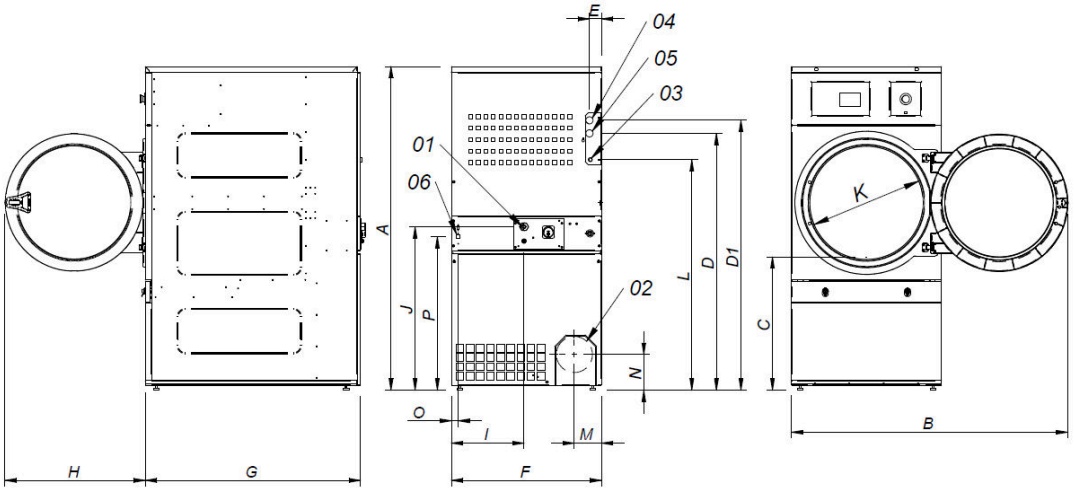

01 POWER SUPPLY
02 FUMES OUTPUT Ø200
03 GAS INLET 1/2"
04 STEAM INLET 3/4"
05 CONDENSATE OUTLET 3/4"
06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-11	1694*	1447	689	1354	1422	68	68	785	855	735	380	870	575	1226	133	180	35	805
DD-14	1694*	1447	689	1354	1422	68	68	785	989	735	380	870	575	1226	133	180	35	805

* Measurement with legs mounted (30mm)