

# DD-11 BASIC EM BASIC dryers



## ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



## FEATURES

Reversing drum action as standard  
Galvanized drum as standard  
Frequency inverter as standard



## EFFICIENCY

Big fluff filter



## VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## ERGONOMICS

Big door diameters  
Opening sense of door adjustable on site



## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics, data recovery for after-sales service, software updates, etc.  
Easy access to components



## OTHERS

White painted panels  
**COOL DOWN** - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved




## OPTIONS

- RD Opposite door opening 11-35
- AF Back panel with air filter from 11 to 35
- BMS New display for EM programmer 11-35
- NG Natural gas heated tumble dryer (LPG as standard)
- RP Reduced power (12kw instead of 18kw) for electric heated 14kg and 18kg models.
- 400V 3N 60 Hz DD-11-35
- 230V 3~ 50 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,18 E
- 230V 3~ 60 Hz DD-11,35 G/S
- AU AGA certification for gas dryers (Australia)
- 230V 1N 50 Hz DD-11 E
- 440/480V 3~ 60 Hz DD-11,18
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DD-11 BASIC EM	
Capacity 1/18		Kg	11,7	
		lb	25,7	
Capacity 1/20		Kg	10,5	
		lb	23,1	
Ø Drum		mm	750	
		inch	29,5	
Drum length		mm	475	
		inch	18,7	
Drum volume		l	210	
		cu ft	7,41	
Ø Door hole		mm	574	
		inch	22,6	
Door center height		mm	976	
		inch	38,4	
Height from floor to bottom of door		mm	618	
		inch	24,33	
ELECTRIC HEATING				
Evaporation capacity		L/h	9,3	
		US gallon/h	2,46	
Hourly output		Kg/h	20,3	
		lb/h	44,75	
Installed heating power		kW	12	
Installed electrical power		kW	12,67	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	14,5	
		US gallon/h	3,83	
Hourly output (gas model)		Kg/h	28,60	
		lb/h	63,05	
Installed gas heating power		kcal/h	17727	
		Btu/h	69996	
Installed gas heating power		kW	20,5	
Installed electrical power		kW	0,67	
Instant propane gas consumption (G31)		Kg/h	1,76	
		lb/h	3,88	
Instant natural gas consumption (G20)		m <sup>3</sup> /h	2,17	
		cfm	1,28	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,25	
Nominal air flow rate		m <sup>3</sup> /h	850	
		cfm	500	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	1,2	
		Btu/h	4097	
Max. front heat emission		kW	0,8	
		Btu/h	2868	
CONNECTIONS			E	G
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	3 x 25 / 63A	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	4 x 10 / 40A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	5 x 4 / 25A	3 x 1,5 / 16A
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	785 / 865	
		inch	30,9 / 34,1	



Net / gross depth	mm	855 / 940
	inch	33,7 / 37
Net height / gross height	mm	1.694 / 1.840
	inch	66,7 / 72,4
Net / gross weight	Kg	172 / 180
	lb	379 / 397
<b>OTHERS</b>		
Sound level	dB	64

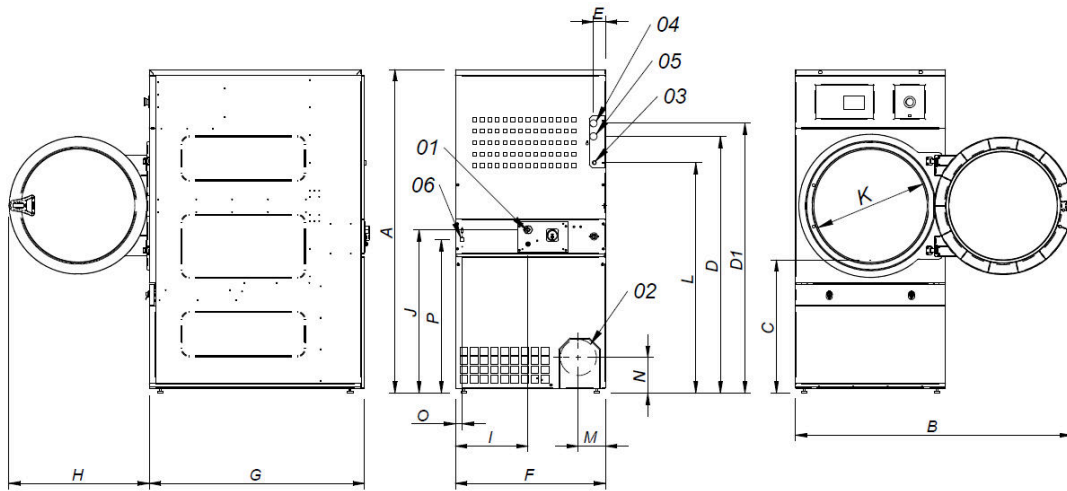

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 ETHERNET CONNECTION (only available CONTROL ET2 models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-11	1694*	1447	689	1354	1422	68	68	785	855	735	380	870	575	1226	133	180	35	805
DD-14	1694*	1447	689	1354	1422	68	68	785	989	735	380	870	575	1226	133	180	35	805

\* Measurement with legs mounted (30mm)

