

# DD-35 BRONZE EM BRONZE dryers



## ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



## FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



## EFFICIENCY

**DOUBLE FLOW** - mixed axial-radial airflow  
Big fluff filter as drawer



## VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## ERGONOMICS

Drawer as fluff filter, stainless steel mesh  
Big door diameters  
Opening sense of door adjustable on site



## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics, data recovery for after-sales service, software updates, etc.  
Easy access to components



## OTHERS

Grey skinplate outer casing, stainless steel look  
**NEW:** transmission by gear motor on models DD-45 to 80  
**SOFT DRY** - new drum with stamped holes  
**COOL DOWN** - anti-wrinkle at the end of the cycle  
Electric, gas or steam heating  
CE approved



## OPTIONS


- DG Double doorglass DD-35-80
- NG Natural gas heated tumble dryer (LPG as standard)
- RD Opposite door opening 11-35
- BMS New display for EM programmer 11-35
- AF Back panel with air filter from 11 to 35
- F06 Fluff filter with grid 0,6mm (standard is 0,3mm)
- F12 Fluff filter with grid 1,2 mm (standard is 0,3 mm)
- SSC Stainless steel outer casing 35
- SSF Stainless steel front panel 28, 35
- BSS Stainless steel steam battery 28-35
- LPB Low steam pressure battery 28,35
- WB Wooden packing 35
- 400V 3N 60 Hz DD--11-35
- 230V 3~ 50 Hz DD-22-35 E
- 230V 3~ 60 Hz DD-22,35 E
- 230V 3~ 60 Hz DD-11,35 G/S
- 440/480V 3~ 60 Hz DD-22-35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DD-35 BRONZE EM
Capacity 1/18	Kg	36,7
	lb	80,8
Capacity 1/20	Kg	33
	lb	72,8
Ø Drum	mm	947
	inch	37,3
Drum length	mm	936
	inch	36,9
Drum volume	l	660
	cu ft	23,30
Ø Door hole	mm	802
	inch	31,6
Door center height	mm	1.040
	inch	40,9
Height from floor to bottom of door	mm	578
	inch	22,74
ELECTRIC HEATING		
Evaporation capacity	L/h	31,1
	US gallon/h	8,22
Hourly output	Kg/h	60
	lb/h	132,28
Installed heating power	kW	36
Installed electrical power	kW	37,15
Drum motor power	kW	0,55
GAS HEATING		
Evaporation capacity (gas model)	L/h	32,1
	US gallon/h	8,48
Hourly output (gas model)	Kg/h	63,90
	lb/h	140,87
Installed gas heating power	kcal/h	35254
	Btu/h	139899
Installed gas heating power	kW	41
Installed electrical power	kW	1,15
Instant propane gas consumption (G31)	Kg/h	3,51
	lb/h	7,74
Instant natural gas consumption (G20)	m <sup>3</sup> /h	4,34
	cfm	2,55
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	50,1
	Btu/h	170948
Installed electrical power	kW	1,15
Steam consumption (8 barG) - Standard	kg/h	89
Steam consumption (116 psiG)	lb/h	107,2
Steam pressure	barG	6 - 9
	psiG	87 - 130,5
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	93
Steam consumption (72,5 psiG) - Low Pressure	lb/h	112
Steam pressure (low pressure)	barG	3 - 6
	psiG	43,5 - 97
Low pressure steam inlet - outlet	BSPT- ISO7.1	1" 1/2
VENTILATION		
Fan motor power	kW	0,55
Nominal air flow rate	m <sup>3</sup> /h	1.200
	cfm	706



Ø Fume exhaust	mm	200	
	inch	7,87	
<b>HEAT EMISSION</b>			
Maximum total heat emission	kW	3,6	
	Btu/h	12291	
Max. front heat emission	kW	2,5	
	Btu/h	8604	
<b>CONNECTIONS</b>			
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 50 / 125A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	3 x 1,5 / 16A
<b>NET DIMENSIONS / PACKING DIMENSIONS</b>			
Net / gross width	mm	985 / 1.065	
	inch	38,8 / 41,9	
Net / gross depth	mm	1.210 / 1.310	
	inch	47,6 / 51,6	
Net height / gross height (* without heating)	mm	1.975 / 2.080	
	inch	77,8 / 81,9	
Net / gross weight	Kg	260 / 285	
	lb	573 / 628	
<b>OTHERS</b>			
Sound level	dB	65	

\* Sizes Gas or steam 45 kg model same as model 80 kg (incorporates the batteries at the back)

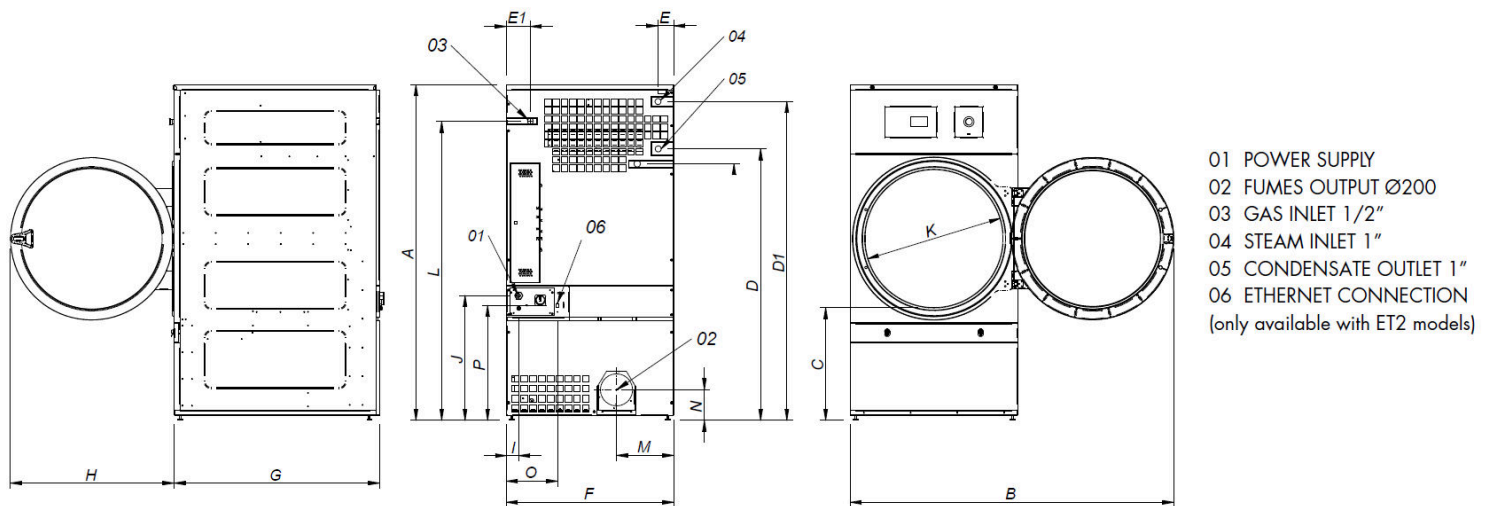

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DD-28	1975*	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	301	676
DD-35	1975*	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	301	676

\* Measurement with legs mounted (30mm)

