



# R2D25-200 GOLD GOLD ø 250 mm wall ironers



## ELECTRONIC CONTROL

BM control: simple and user friendly with an AUTO mode, automatic management of ironing speed according to the selected temperature.  
Digital speed and temperature display



## FEATURES

Large roll contact area with the linen  
Operation mode identical to a flatwork ironer: no roll lifting, more ergonomic  
Models equipped as standard with Nomex belts, suction and variable speed inverter: more productivity  
Adjustable speed and temperature



## ROBUSTNESS

**Nomex coating as standard:** resistant to high temperatures  
Panels in grey skinplate and stainless steel  
Wooden feeding board  
New kinematics, better reliability  
Industrial components, more durable



## EFFICIENCY

Acoustic comfort : <55 dB  
Minimum space requirement: space saving, suitable for small spaces  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, etc.



## MAINTENANCE

Easy installation : requires only an electrical connection  
Easy access on both sides for maintenance  
Quick and easy dismantling of bearings



## OTHERS

Front feeding and return  
Roll ø 250 mm  
Working widths: 1.400 and 2.000 mm  
Electric heating  
CE certification




## OPTIONS

- 440V III 60Hz No neutral (marine) - ø 250 mm only

GENERAL DETAILS		UNIT.	R2D25-200 GOLD
Theoretical production 20-25% humidity		Kg/h	50
		Lb/H	110,23
Roll Ø		mm	250
		Inch	9,84
Working width		mm	2.000
		Inch	78,74
Working speed		m/min	1,5-6
		ft/mn	4,9 - 19,6
-		YES	
Electronic control	-		YES
-		NO	
POWER			
Heating power		Kw	12
Roll motor power		Kw	0,18
Fan motor power		Kw	0,12
Total electric power		Kw	12,3
CONNEXIONS			
Tension 230V I + N + T		n° x mm² /A	N/A
		n° x AWG/A	N/A
Tension 230V III + T		n° x mm² /A	4 x 10 / 40A
		n° x AWG/A	4 x 7 / 40A
Tension 400V III + N + T		n° x mm² /A	5 x 4 / 20A
		n° x AWG/A	5 x 11 / 20A
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width		mm	2.523 / 2.490
		Inch	97 / 98
Net depth / Gross depth		mm	484 / 540
		Inch	19 / 21
Net height / Gross height		mm	985 / 1.130
		Inch	39 / 44
Net weight / Gross weight		Kg	184 / 204
		Lb	406 / 450
Volume		m³	1,20 / 1,52
		fr3	42,48 / 53,66
OTHERS			
	Nº	1	
	mm	80	
	Inch	3,15	
	m³/h	500	
	cfm	294	
Noise level		dB	60

\*Dismantling of the extraction on left side for packaging



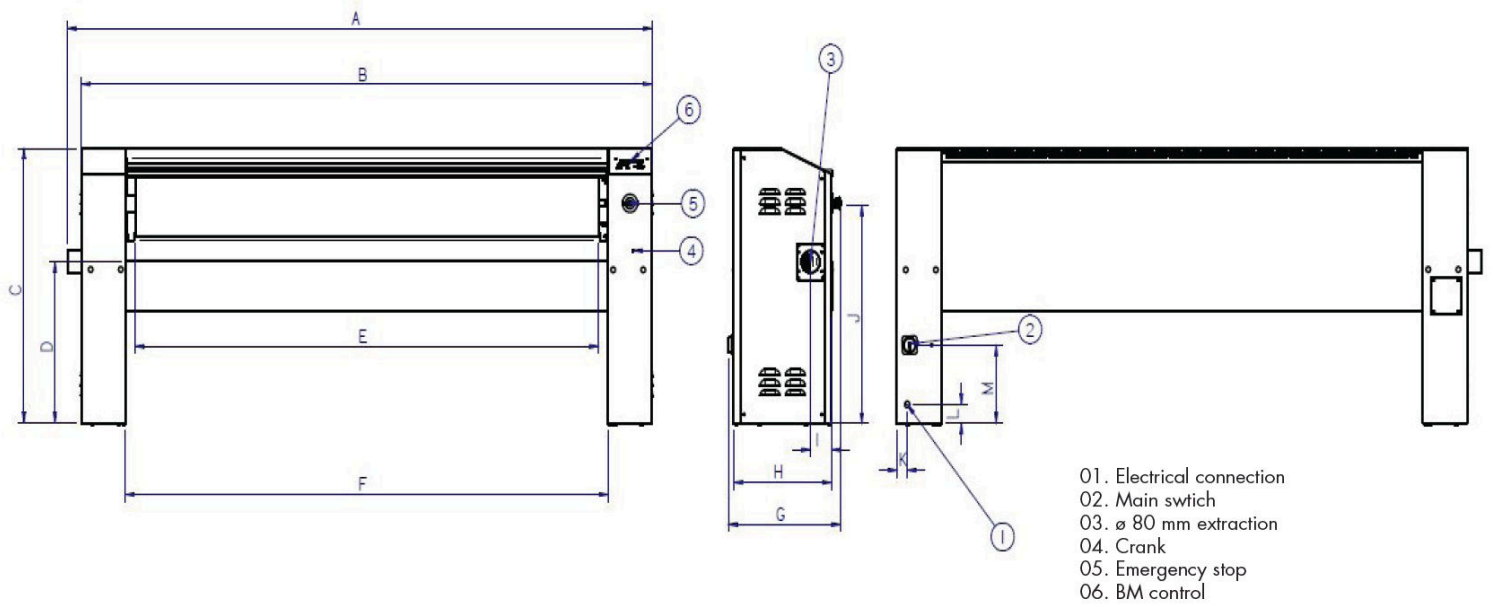

	A	B	C	D	E	F	G	H	I	J	K	L	M
R2D25/140 GOLD	1.923	1.862	985	610	1.400	1.480	484	423	91	791	45	75	287
R2D25/200 GOLD	2.523	2.462	985	610	2.000	2.080	484	423	91	791	45	75	287

